

**Lamp measurement report – 2 June 2009 for Line Lite
International BV**

Line Lite International BV downlighter 12leds





Lamp measurement report – 2 June 2009 for Line Lite International BV


Summary measurement data

parameter	meas. result	remark
Color temperature	6265 K	Cold white
Luminous intensity I_v	442 Cd	
Beam angle	47 deg	
Power P	14.5 W	
Power Factor	0.59	For every 1 kWh net power consumed, there has been 1.4 kVAhr for reactive power..
Luminous flux	369 lm	
Luminous efficacy	25 lm/W	
CRI_Ra	76	Color Rendering Index.
Coordinates chromaticity diagram	x=0.3159 and y=0.3404	
Fitting	230V	This is grid voltage.
D x H external dimensions	240 x 145 mm	External dimensions of the down lighter.
D luminous area	163 mm	Dimensions of the luminous area (used in Eulumdat file). This is equal to the diameter of the diffusor plate in front of the leds.
General remarks		<p>The ambient temperature during the whole set of measurements was 24.0-25.0 deg C.</p> <p>Warm up effect: during the warm up time the illuminance and the consumed power decrease with 9%.</p> <p>Voltage dependency: the illuminance and power consumption are independent on the voltage.</p> <p>This article contains an additional photo of this lightbulb.</p>

Lamp measurement report – 2 June 2009 for Line Lite International BV

Eulumdat light diagram

An interesting graph is the light diagram, indicating the intensity in the C0-C180 and the C90-C270 plane. This light diagram below comes from the program Qlumedit, that extracts these diagrams from an Eulumdat file.

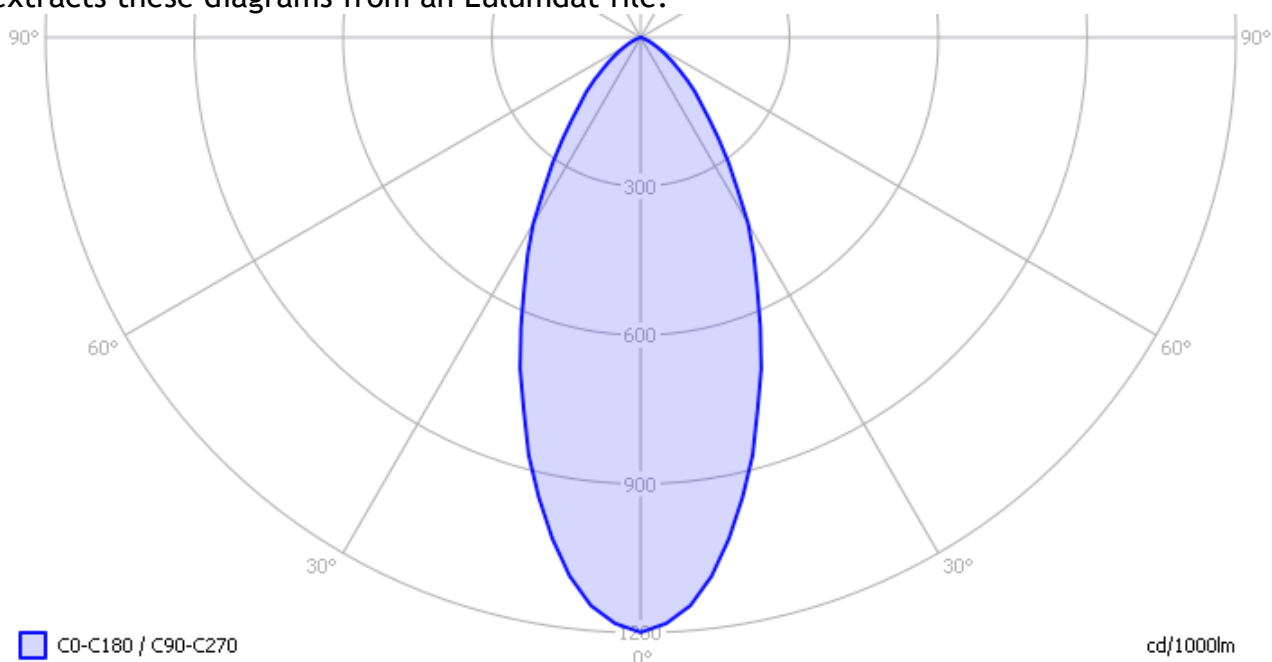

The light diagram giving the radiation pattern.


It indicates the luminous intensity around the light bulb. This light bulb has symmetry over the z-axis (from top to bottom) therefore the C0-C180 plane and the C90-C270 plane give the same light diagram. The bundle is somewhat bigger than a bundle from a halogen lightspot.

The unit is Cd/1000lm, meaning the intensity in Cd assuming there would be 1000 lumen in the measured light bulb. This enables comparing different types of light bulbs.

Illuminance E_v at 1 m distance, or luminous intensity I_v

Herewith the plot of the *averaged* luminous intensity I_v as a function of the inclination angle with the light bulb.

Lamp measurement report – 2 June 2009 for Line Lite International BV

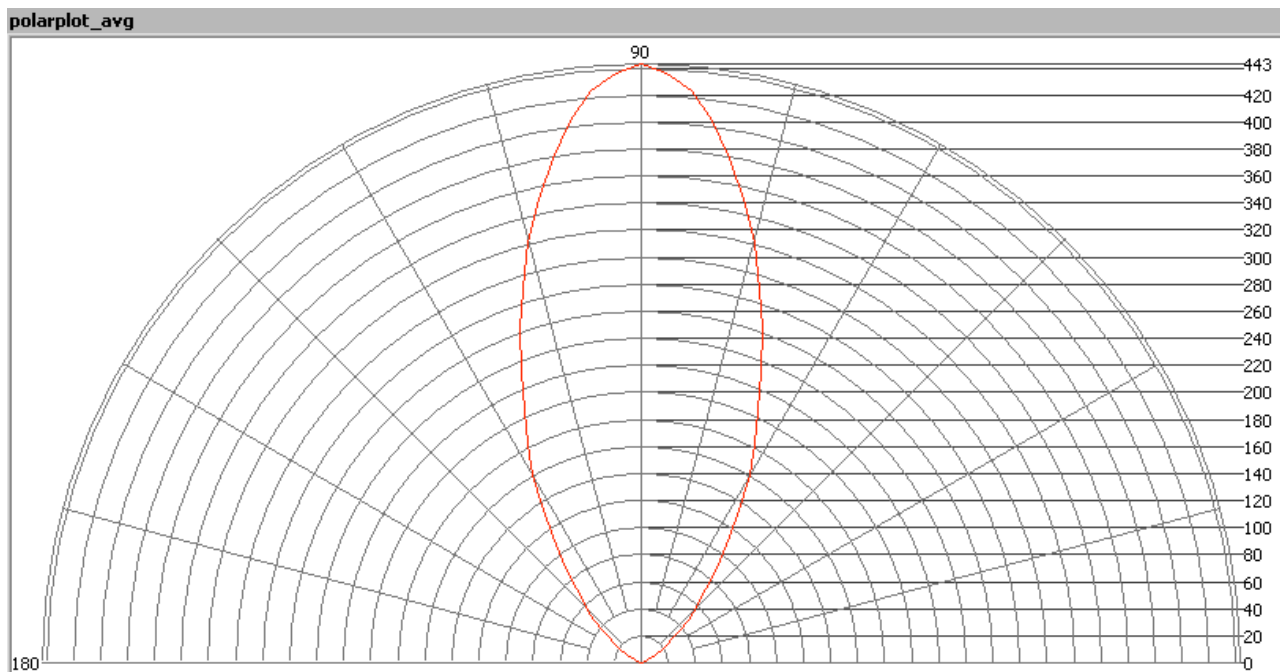


The radiation pattern of the light bulb.

This radiation pattern is the average of the light output of the light diagram given earlier. Also, in this graph the luminous intensity is given in Cd.

These averaged values are used (later) to compute the lumen output.

Dependency from Kantelhoek

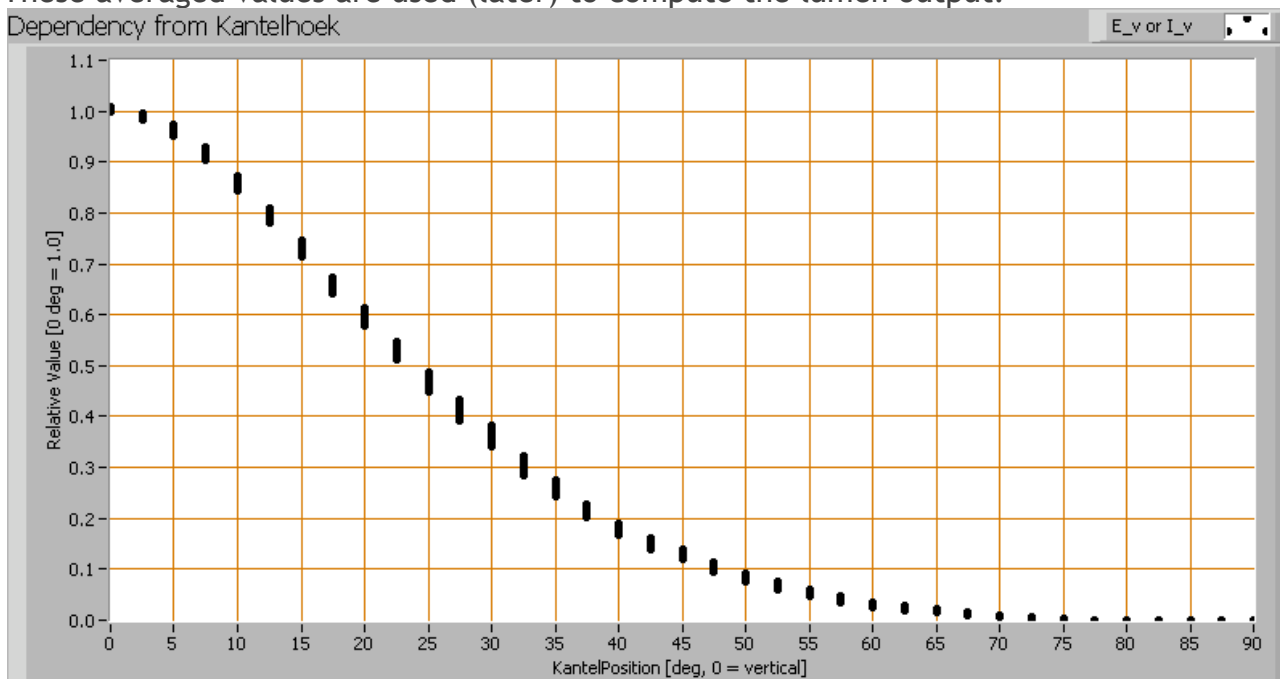



Lamp measurement report – 2 June 2009 for Line Lite International BV

Intensity data of every measured turn angle at each inclination angle.

This plot shows per inclination angle the intensity measurement results for each turn angle at that inclination angle. There are little differences in illuminance values for different turn angles. However for further calculations the averaged values will be used. When using the average values per inclination angle, the beam angle can be computed, being 47 degrees.

Luminous flux

With the averaged illuminance data at 1 m distance, taken from the graph showing the averaged radiation pattern, it is possible to compute the luminous flux.

The result of this computation for this light spot is a luminous flux of 369 lm.

Luminous efficacy


The luminous flux being 369, and the power of the lightbulb being 14.5 W, yields a luminous efficacy of 25 lm/W.

A power factor of 0.59 means that for every 1 kWh net power consumed, a reactive component of 1.4 kVAr was needed.

Light bulb voltage	230 VAC
Light bulb current	106 mA
Power P	14.5 W
Apparent power S	24.5 VA
Power factor	0.59

Of this light bulb the voltage across and the resulting current through it are measured and graphed.


Lamp measurement report – 2 June 2009 for Line Lite International BV

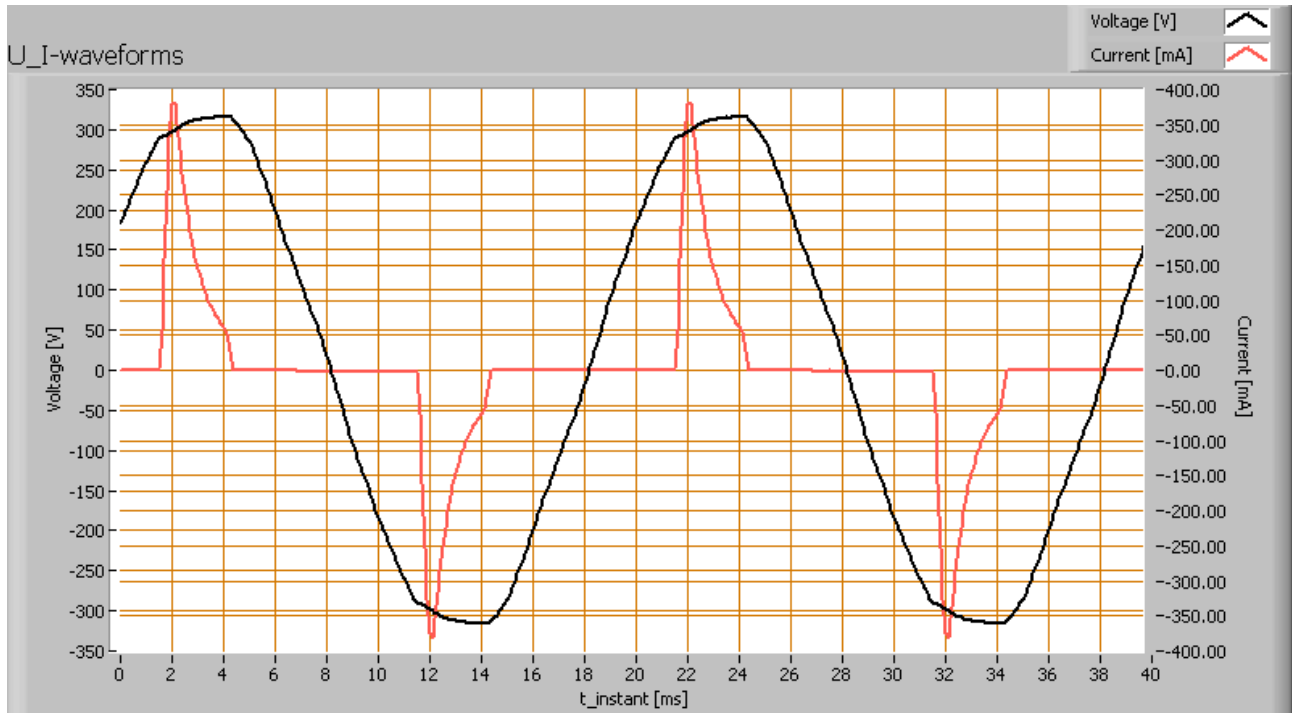

Voltage across and current through the lightbulb

There are peaks in current near the tops of the voltage. This results in a waveform for the current that is different from the sineform of the voltage, resulting an a power factor less than 1. Also the power spectrum of the current is determined.

Lamp measurement report – 2 June 2009 for Line Lite International BV

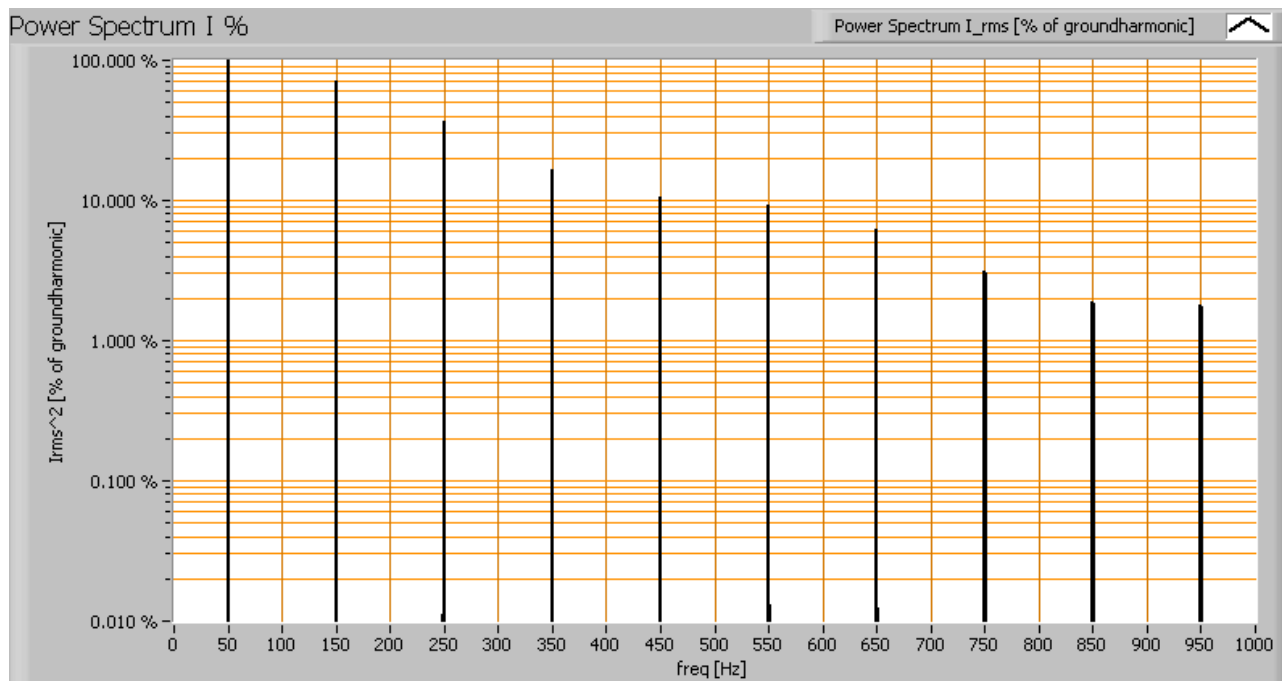


Current power spectrum in % of the first harmonic (50 Hz).

The current peaks result in a current power spectrum with a considerable amount of higher harmonics.

Lamp measurement report – 2 June 2009 for Line Lite International BV

Color temperature and Spectral power distribution

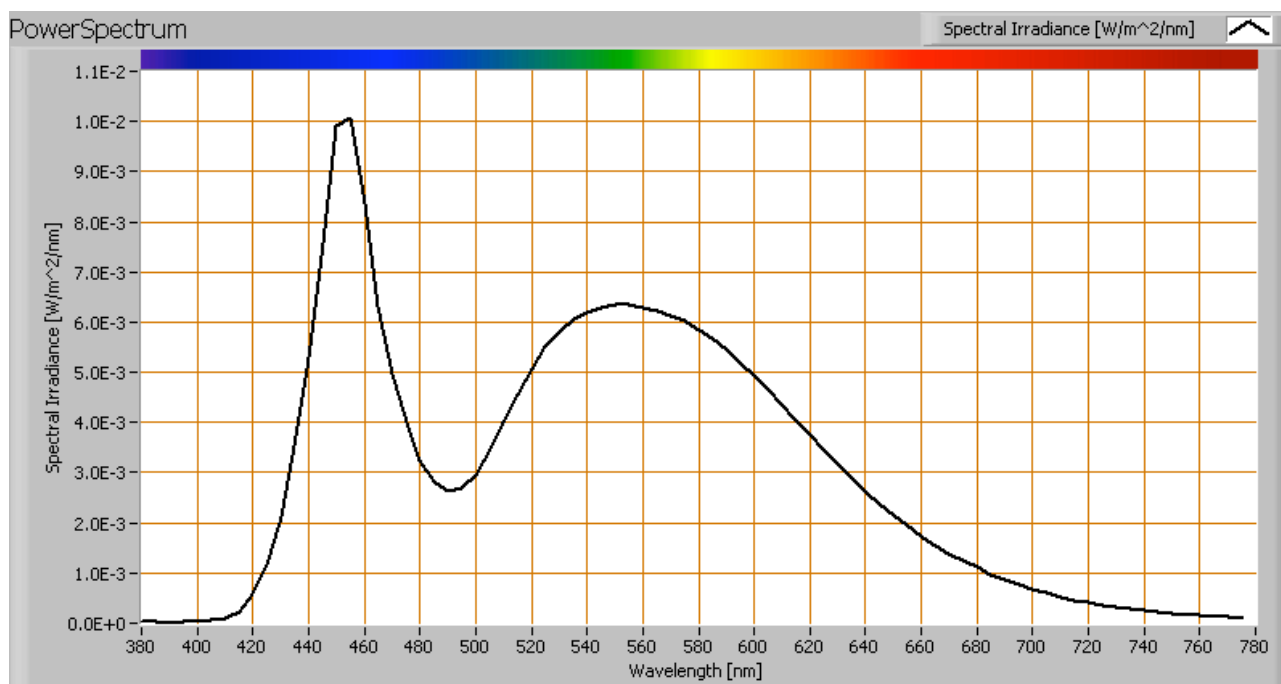


The spectral power distribution of this light bulb.

The measured color temperature is about 6250 K which is cold white.

This color temperature is measured straight underneath the light bulb. Below a graph showing the color temperature for different inclination angles.

Lamp measurement report – 2 June 2009 for Line Lite International BV

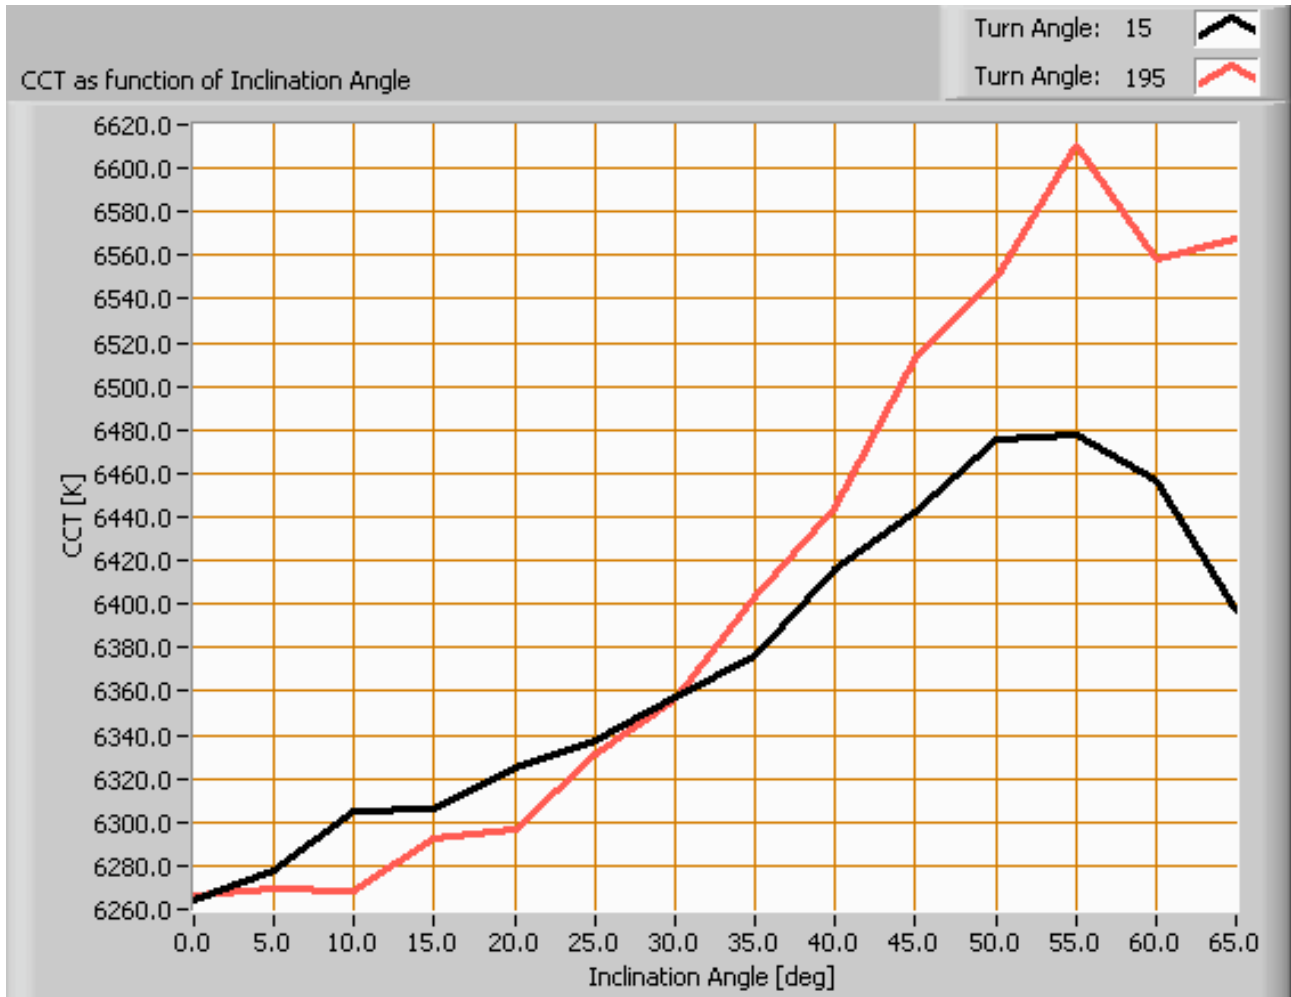


Color temperature as a function of inclination angle.

The color temperature is given for inclination angles up to 65 degrees, since at higher angles there is almost no light output anymore.

The value remains constant within 5 %.

Lamp measurement report – 2 June 2009 for Line Lite International BV

Chromaticity diagram

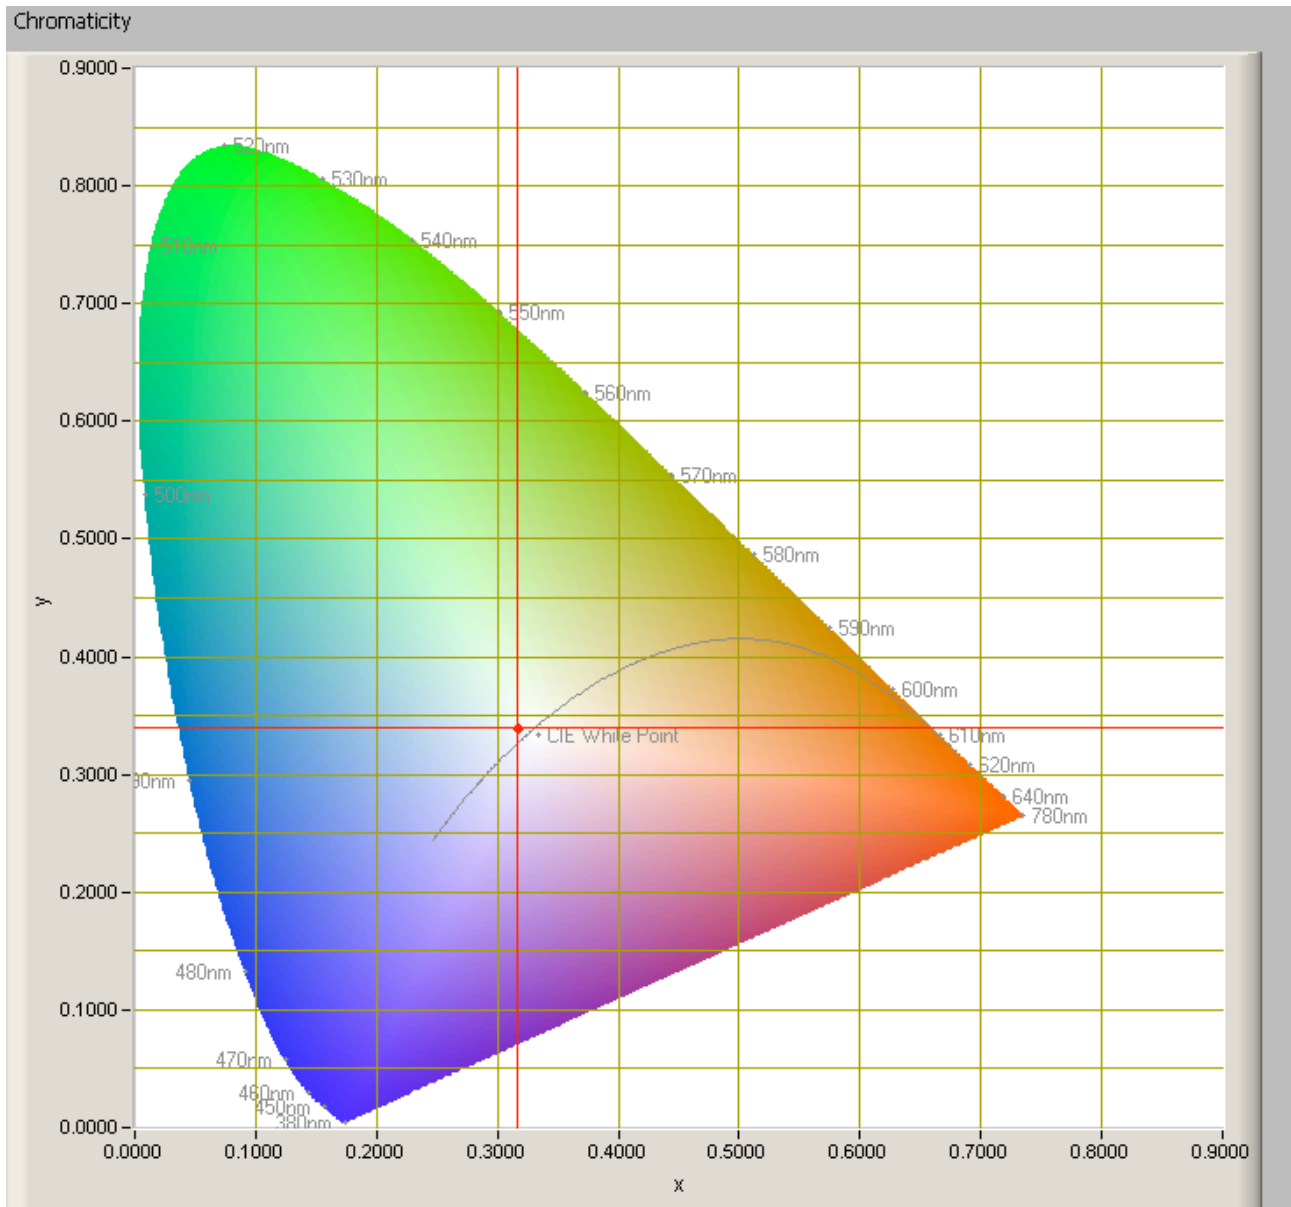

The chromaticity space and the position of the lamp's color coordinates in it.

The light coming from this lamp is close to the Planckian Locus (the black path in the graph).

Its coordinates are $x=0.3159$ and $y=0.3404$.

Lamp measurement report – 2 June 2009 for Line Lite International BV

Color Rendering Index (CRI) or also Ra















Herewith the image showing the CRI as well as how well different colors are represented (rendered). The higher the number, the better the resemblance with the color when a black body radiator would have been used (the sun, or an incandescent lamp).

Each color has an index R_x , and the first 8 indexes ($R_1 \dots R_8$) are averaged to compute the R_a which is equivalent to the CRI.

☐ manual

Reference Illuminant: Planckian radiator CCT: 6265 K

Chromaticity Difference DC= 4.25E-3

R1= 72.5		R8= 61.95	
R2= 82.25		R9= -19.35	
R3= 87.25		R10= 56.05	
R4= 73.65		R11= 69.05	
R5= 73.2		R12= 48.3	
R6= 74.65		R13= 74.9	
R7= 86		R14= 92.85	

Ra
(mean value of $R_1 - R_8$)
76.45

CRI of the light of this lightbulb.


The value of 76 is lower than 80 which is considered a minimum value for indoor usage.

Note: the chromaticity difference is 0.0043 indicates the distance to the Planckian Locus. Its value is lower than 0.0054, which means that the calculated CRI result is meaningful.

Voltage dependency

The dependency of a number of lamp parameters on the lamp voltage is determined. For this, the lamp voltage has been varied and its effect on the following lamp parameters measured: illuminance E_v [lx], the lamp power P [W], the (Correlated) Color Temperature [K] and the luminous efficacy [lm/W].

Lamp measurement report – 2 June 2009 for Line Lite International BV

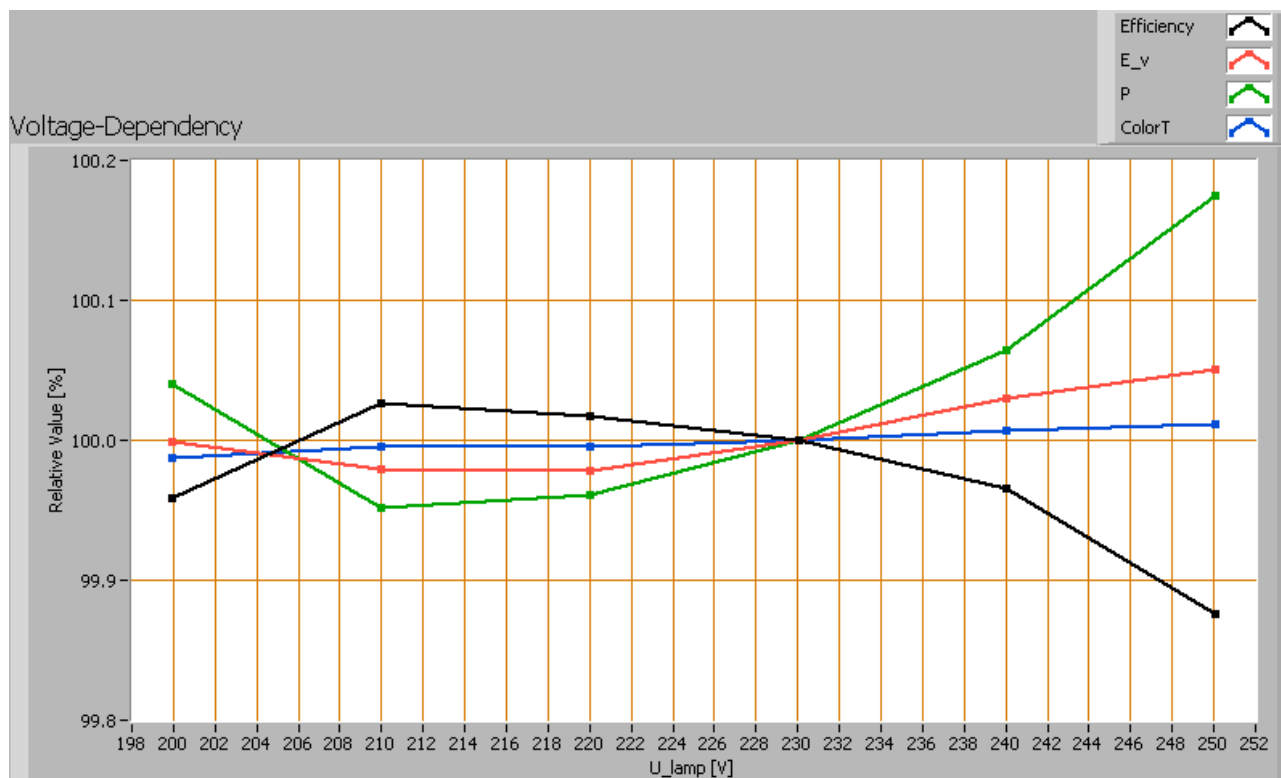

Lamp voltage dependencies of certain light bulb parameters, where the value at 230 V is taken as 100 %.


The consumed power and the illuminance vary insignificantly when the voltage varies between 200-250 V.

When the voltage at 230 V varies with + and - 5 V, then the illuminance varies within 0.1 %, so when abrupt voltage changes occur this effect is not visible in the illuminance output.

Warm up effects

After switch on of a cold lamp, the effect of heating up of the lamp is measured on illuminance E_v [lx], color temperature CT or correlated color temperature CCT [K], the lamp power P [W] and the luminous efficacy [lm/W].

Lamp measurement report – 2 June 2009 for Line Lite International BV

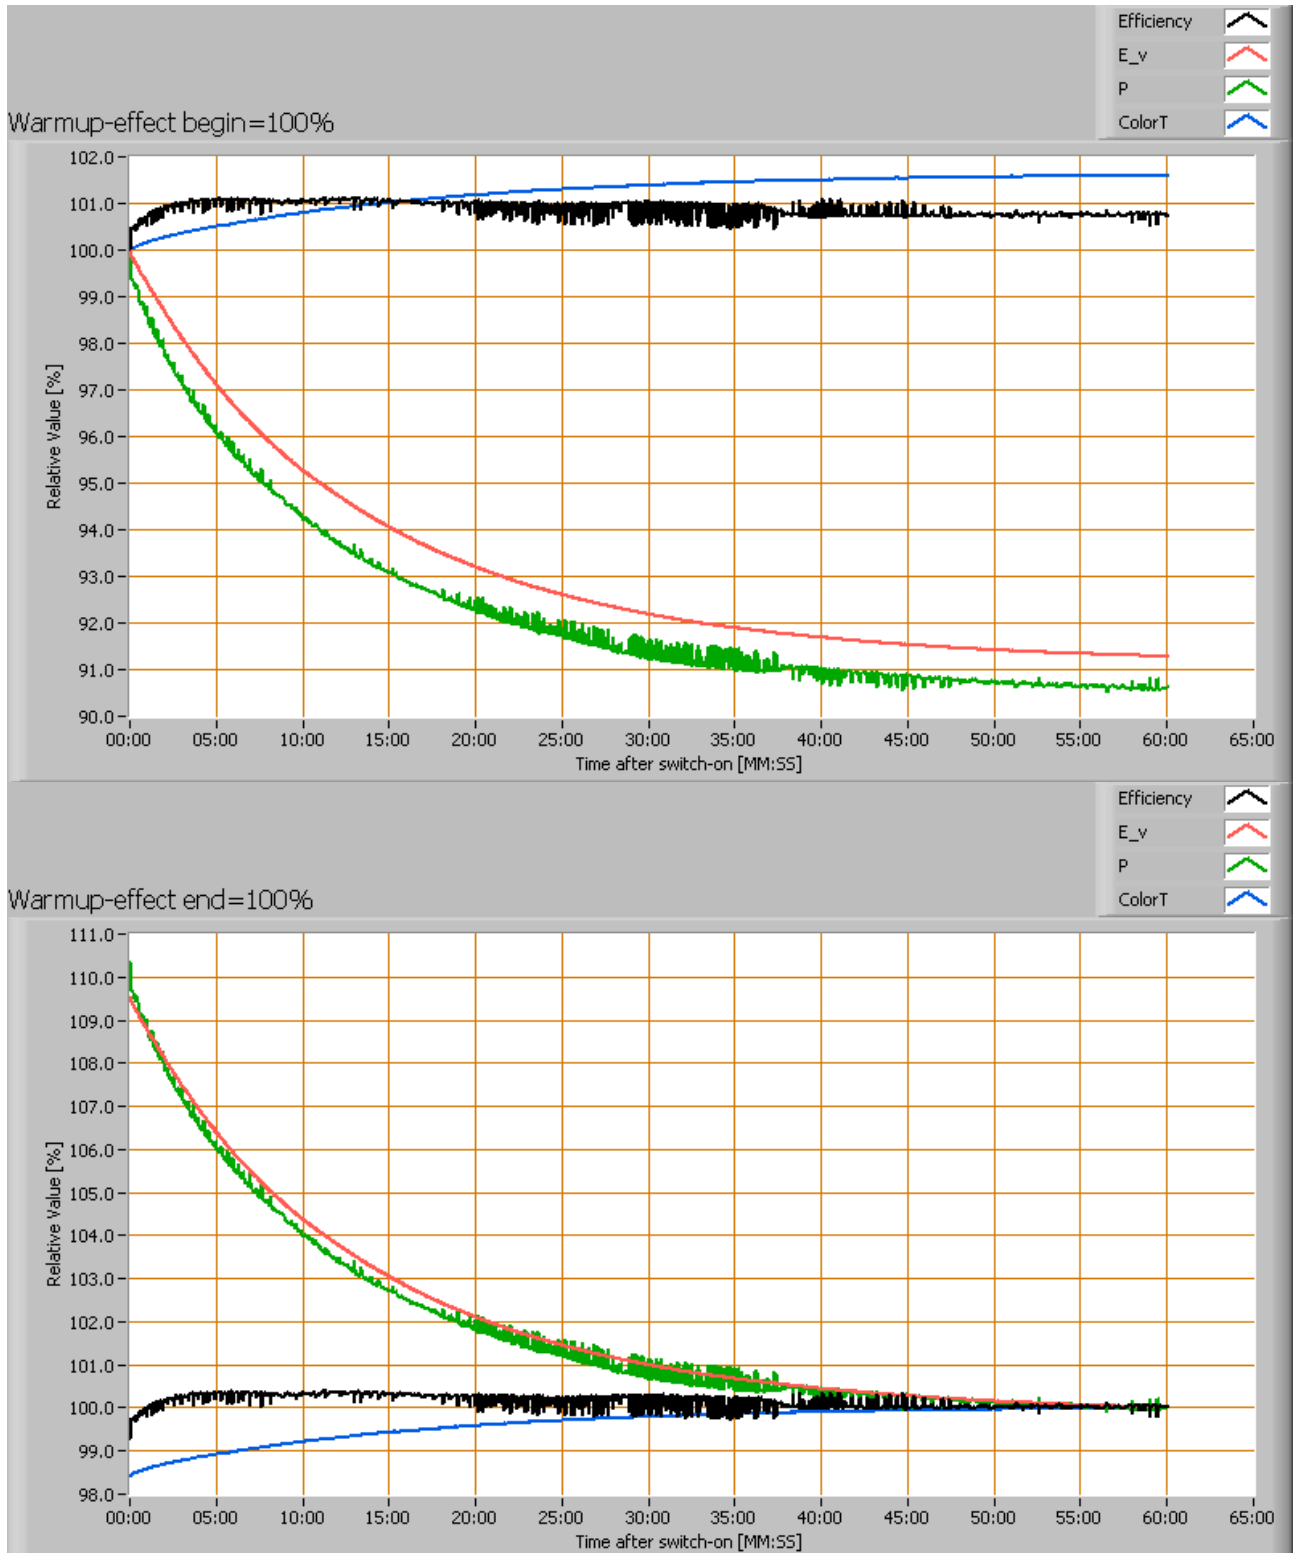



Lamp measurement report – 2 June 2009 for Line Lite International BV

Effect of warming up on different light bulb parameters. At top the 100 % level is put at begin, and at bottom at the end.

During a warm up time of 40 minutes, the illumination and the consumed power decrease with 9 %.

Additional photo

The diffuser plate can easily be removed

**Lamp measurement report – 2 June 2009 for Line Lite
International BV**





Lamp measurement report – 2 June 2009 for Line Lite International BV

The used LEDs behind the diffusor plate.

Disclaimer

The information in this OliNo report is created with the utmost care. Despite of this the information can have inaccuracies. OliNo cannot be held liable for the content of the information in this report nor for the consequences of its use. The data in this report is not legally binding.