

Lamp measurement report – 22 Nov 2010

Led tube 120cm cold white with transparent cover
by
SoLuXima



Lamp measurement report – 22 Nov 2010

Summary measurement data


parameter	meas. result	remark
<u>Color temperature</u>	6112 K	Cold white
Luminous intensity I_v	539 Cd	Measured straight underneath the lamp.
Illuminance modulation index	2 %	Measured straight underneath the lamp. Is a measure for the amount of flickering.
Beam angle	118 deg	118° for all the C0-C180-plane (perpendicular to the length of the lamp) and 117° for the C90-C270 plane (cutting the lamp in two along its length).
Power P	16.8 W	
Power Factor	0.94	For every 1 kWh net power consumed, there has been 0.4 kVAhr for reactive power.
THD	28 %	Total Harmonic Distortion
Luminous flux	1678 Lm	
Luminous efficacy	100 Lm/W	
EU-label classification	A	The energy class, from A (more efficient) to G (least efficient).
CRI_Ra	64	Color Rendering Index.
Coordinates chromaticity diagram	x=0.3197 and y=0.3341	
Fitting	TL	This lamp is connected directly to the 230 V grid voltage.
PAR-value	4.6 $\mu\text{Mol/s/m}^2$	The number of photons seen by an average plant when it is lit by the light of this light bulb. Value valid at 1 m distance from light bulb.

Lamp measurement report – 22 Nov 2010

PAR-photon efficacy	0.8 $\mu\text{Mol/s/W}_e$	The total emitted number of photons by this light, divided by its consumption in W. It indicates a kind of efficacy in generating photons.
S/P ratio	1.9	This factor indicates the amount of times more efficient the light of this light bulb is perceived under scotopic circumstances (low environmental light level).
L x D external dimensions	1196 x 26 mm	External dimensions of the lamp, length is without pins.
L x W x H luminous area	1150 x 16 x 1 mm	Dimensions of the luminous area (used in Eulumdat file). This is the surface of the plate on which the leds are mounted. In the C90-C270 plane the height of the illumination area is not existent as the tube ends block light directed sideways coming from the (small) height of the leds.
General remarks		<p>The ambient temperature during the whole set of measurements was 23.3-25.7 deg C.</p> <p>The temperature of the housing gets about 18 degrees hotter than ambient temperature.</p> <p>Warm up effect: during the warm up time the illuminance decreased about 7 % and the consumed power with about 5 %.</p> <p>Voltage dependency: the power consumption and illuminance vary insignificantly, when the power voltage varies between 200-250 V.</p> <p>At the end of the article an additional photo.</p>

Lamp measurement report – 22 Nov 2010

Overview table

m.	Ø 50%		C0-180: 118° C90-270: 117° 	E (lux)	Luminaire Efficacy
	C0-180	C90-270			100 (lumen per Watt)
0.25	0.83	0.82		8625	Half-peak diam C0-180
0.5	1.67	1.63		2156	3.34 x diameter(m)
1	3.34	3.26		539	Half-peak diam C90-270
1.5	5.01	4.9		240	3.26 x diameter(m)
3	10.02	9.79		60	Illuminance
4	13.36	13.06		34	539 / distance² (lux)
5	16.7	16.32		22	Total Output
					1678 (lumen)


The overview table is explained on the OLiNo website.

Please note that this overview table makes use of calculations, use this data with care as explained on the OLiNo site. E (lux) values are not accurate, when within 5 x 1150 mm ≈ 6000 mm. Within this distance from the lamp, the measured lux values will be less than the computed values in this overview as the measurements are then within the near field of the lamp.


EU Energy label classification

With the measurement results of the luminous flux and the consumed power the classification on energy of this lamp is calculated. This information is requested in the EU for certain household lamps, see also the OLiNo site that explains for which lamps it is requested, how the label looks like and what information it needs to contain. Herewith the labels for this lamp in color and black and white.

Lamp measurement report – 22 Nov 2010

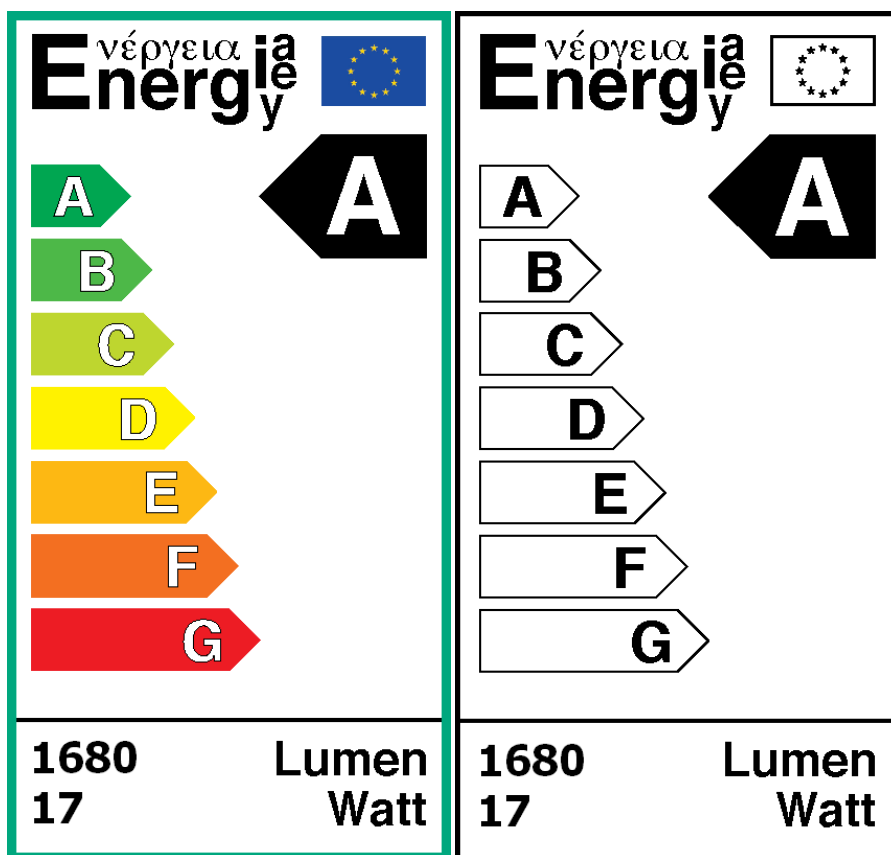

EU energy label of this lamp

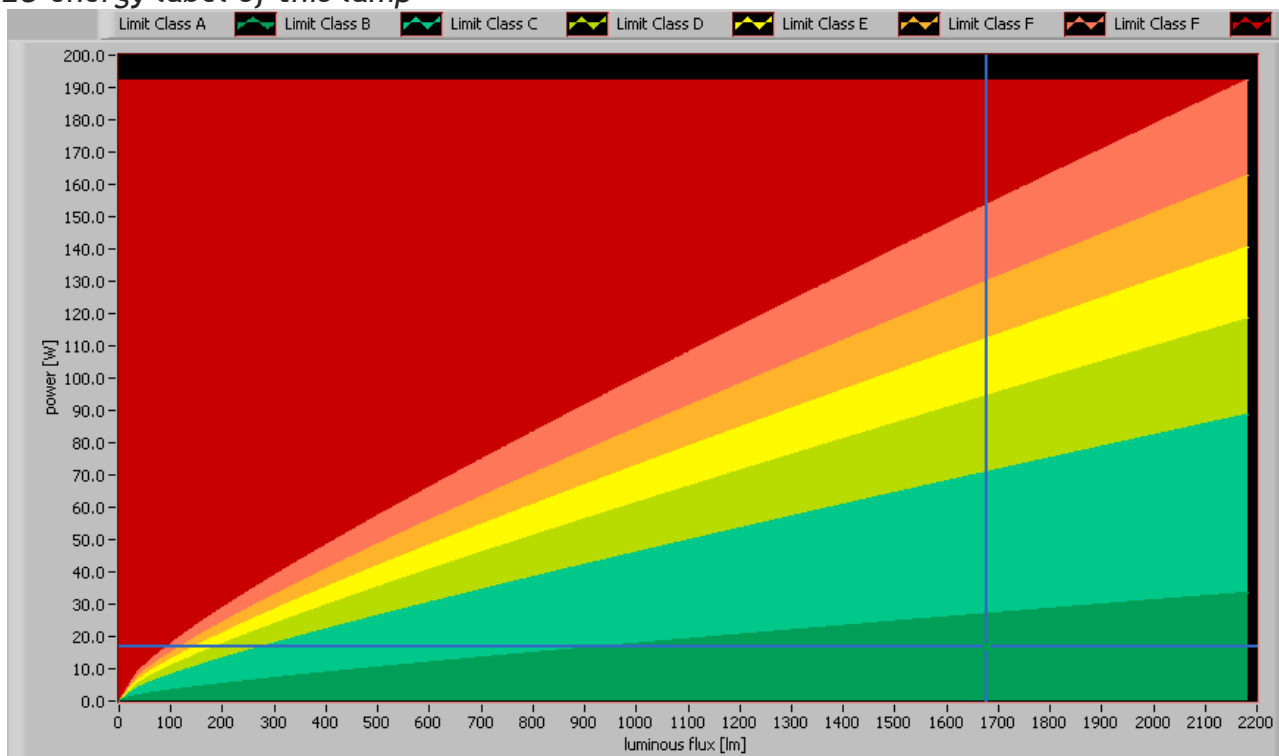


Lamp measurement report – 22 Nov 2010

The lamp's performance in the lumen-Watt field, with the energy efficacy fields indicated.

Eulumdat light diagram

This light diagram below comes from the program Qlumedit, that extracts these diagrams from an Eulumdat file. It is explained on the OliNo site.

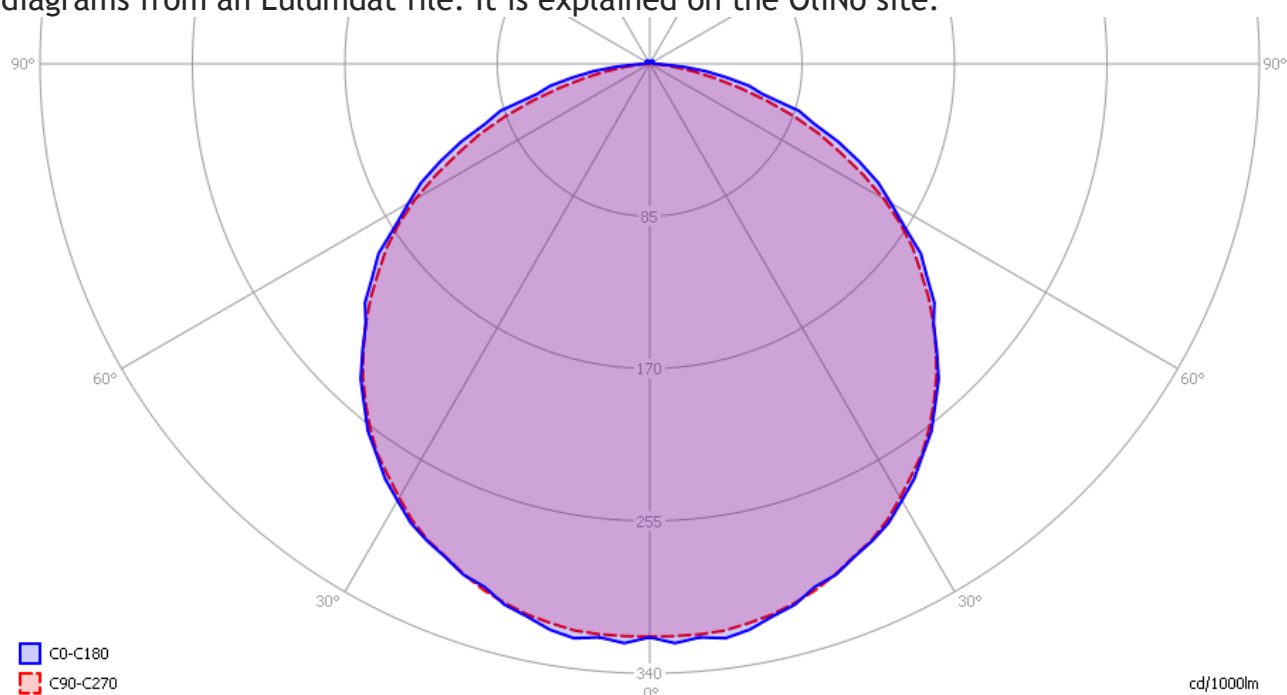


The light diagram giving the radiation pattern.

It indicates the luminous intensity around the light bulb. The C0-C180 plane is along the width direction of the lamp) and is as wide of that of the C90-C270 plane (along the length direction of the lamp).

Illuminance E_v at 1 m distance, or luminous intensity I_v

Herewith the plot of the *averaged* luminous intensity I_v as a function of the inclination angle with the light bulb.


Lamp measurement report – 22 Nov 2010

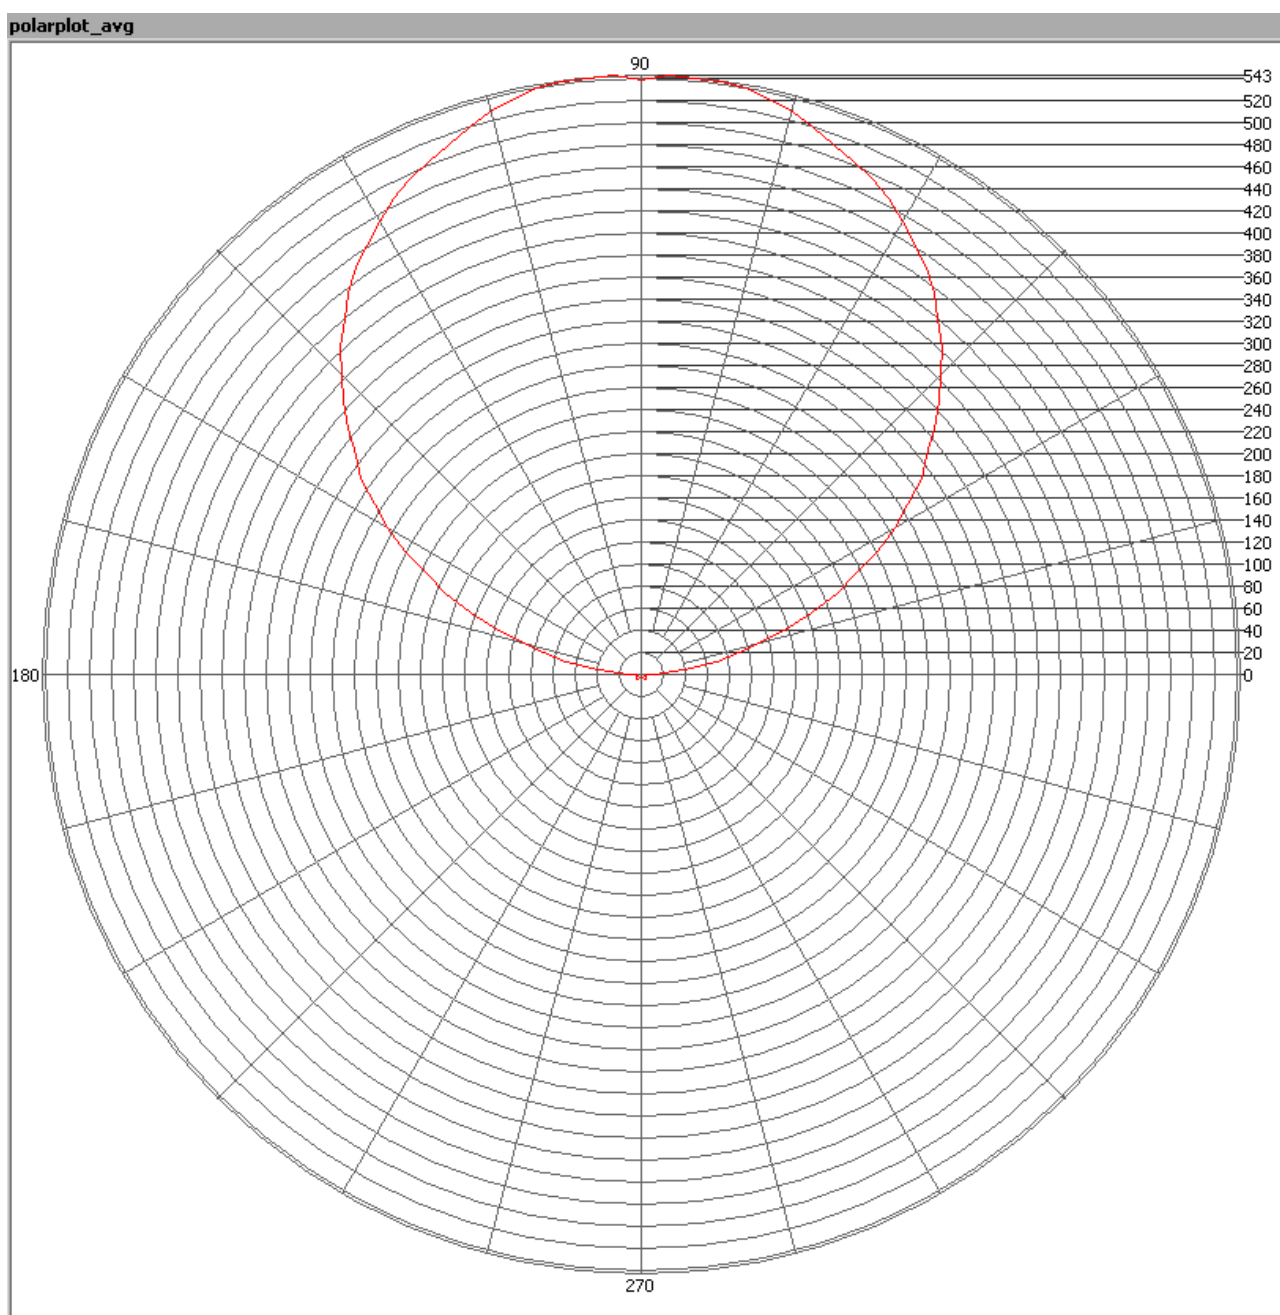

The radiation pattern of the light bulb.

This radiation pattern is the average of the light output of the light diagram given earlier. Also, in this graph the luminous intensity is given in Cd. These averaged values are used (later) to compute the lumen output.

Lamp measurement report – 22 Nov 2010

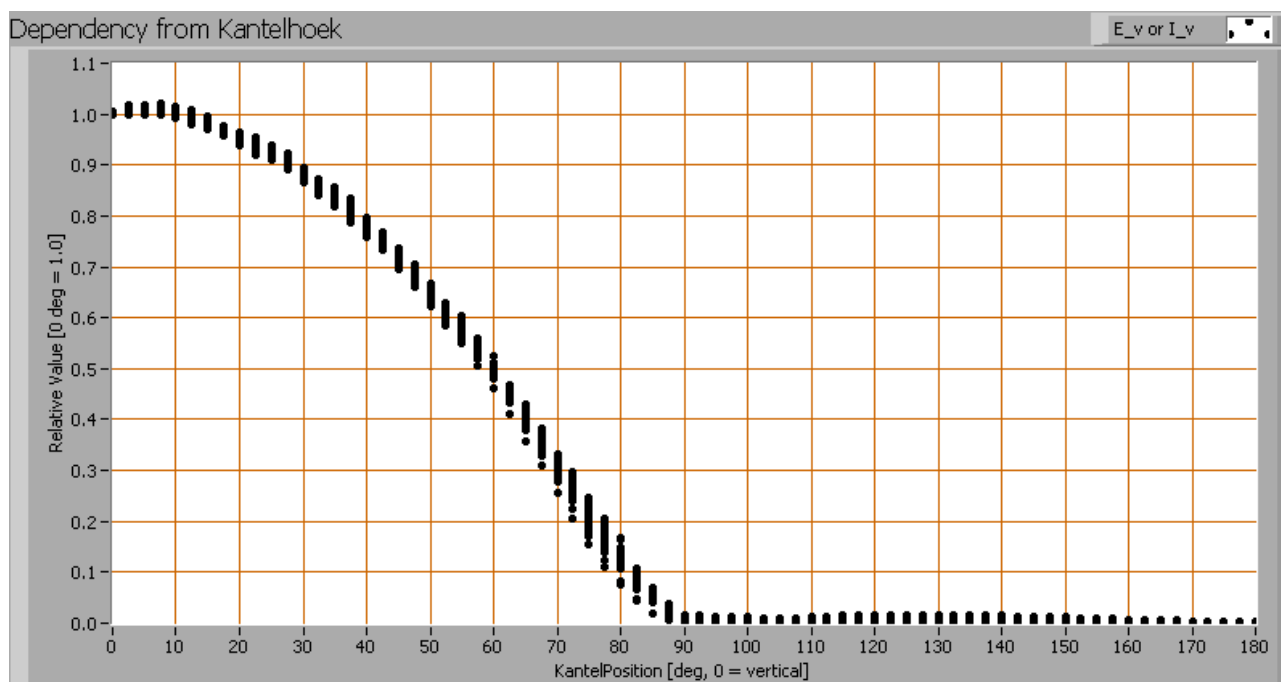

Intensity data of every measured turn angle at each inclination angle.

This plot shows per inclination angle the intensity measurement results for each turn angle at that inclination angle. There normally are differences in illuminance values for different turn angles. However for further calculations the averaged values will be used. When using the average values per inclination angle, the beam angle can be computed, being 118° for the C0-C180 and 117° for the C90-C270 plane.

Luminous flux

With the averaged illuminance data at 1 m distance, taken from the graph showing the averaged radiation pattern, it is possible to compute the luminous flux.

The result of this computation for this light spot is a luminous flux of 1678 Lm.

Luminous efficacy

The luminous flux being 1678 Lm, and the power of the light bulb being 16.8 W, yields a luminous efficacy of 100 Lm/W.


Lamp measurement report – 22 Nov 2010

Electrical properties

A power factor of 0.94 means that for every 1 kWh net power consumed, a reactive component of 0.4 kVAR was needed.

Lamp voltage	230 VAC
Lamp current	77 mA
Power P	16.8 W
Apparent power S	17.8 VA
Power factor	0.94


Of this light bulb the voltage across and the resulting current through it are measured and graphed. See the OLiNo site how this is obtained.

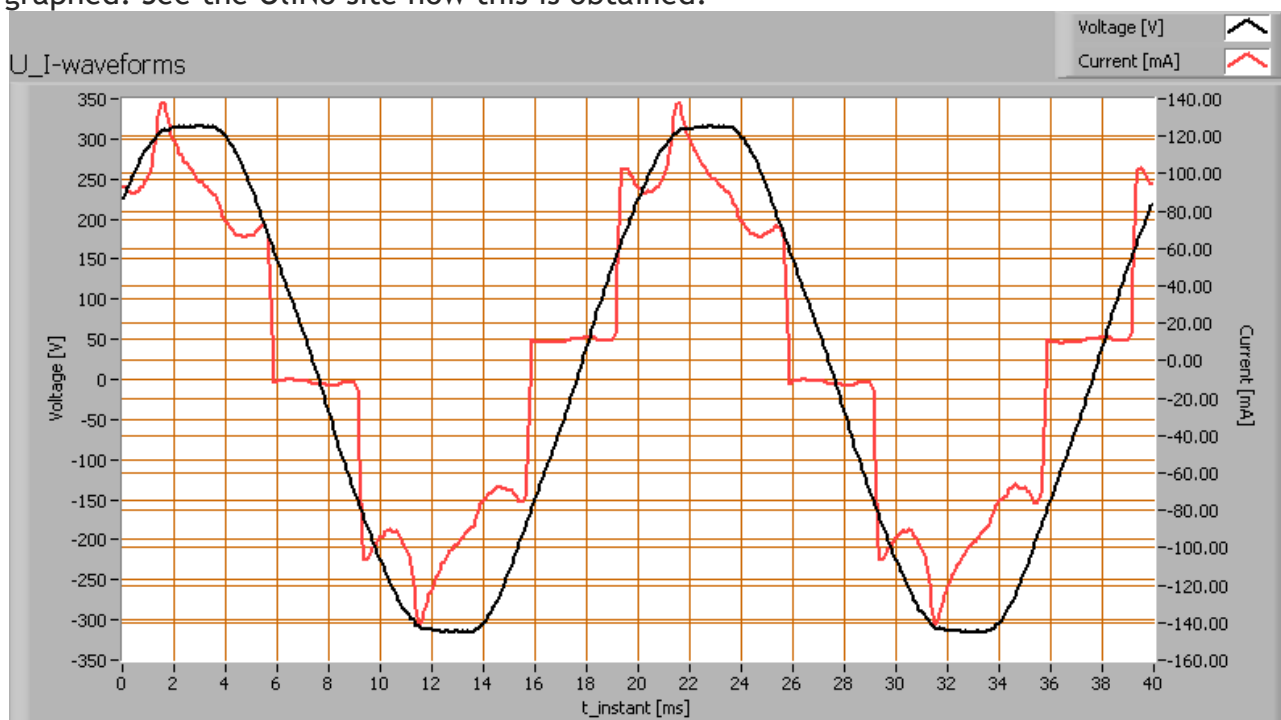

Voltage across and current through the lightbulb

This waveforms have been checked on requirements posed by the norm IEC 61000-3-2:2006 (including up to A2:2009). See also the explanation on the OLiNo website.

Lamp measurement report – 22 Nov 2010

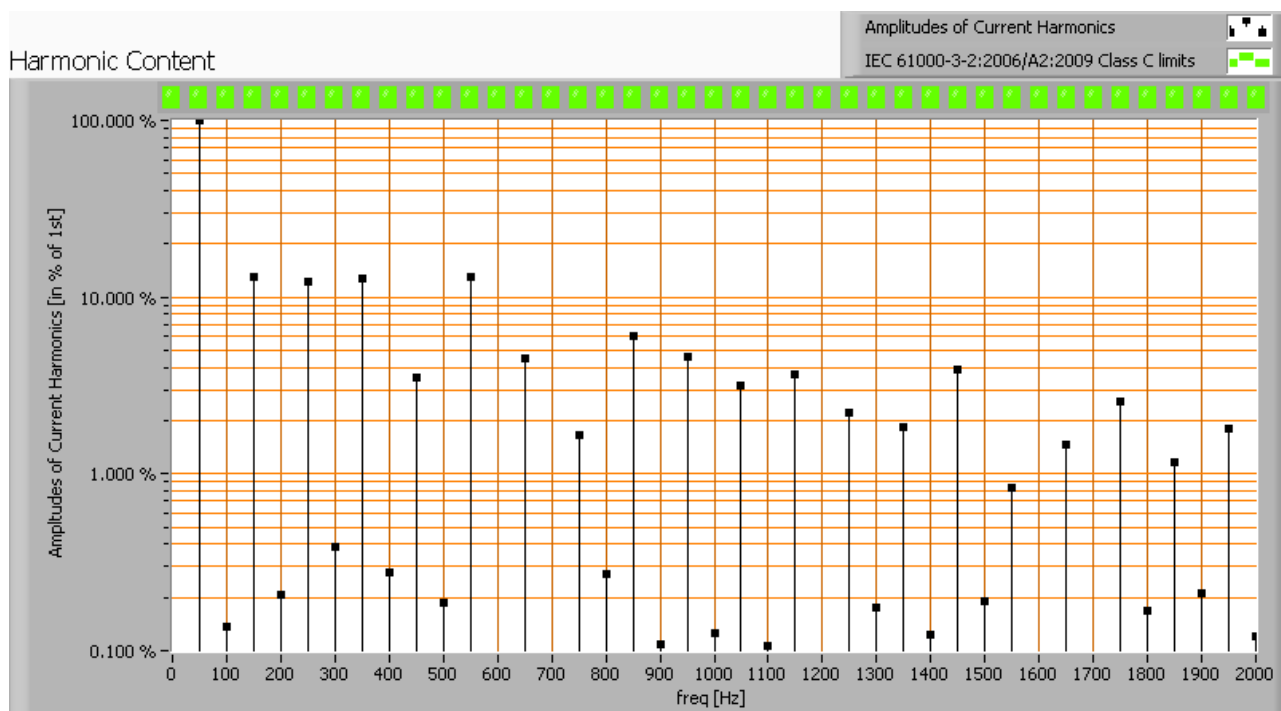

Harmonics in the current waveform and checked against IEC61000-3-2:2006 and A2:2009


There are no limits for the harmonics for lighting equipment ≤ 25 W.

The Total Harmonic Distortion of the current is computed as 28 %.


Temperature measurements lamp

When a piece of masking tape is stuck on the aluminum side of the tube and the temperature measured, then the measurement directly on the aluminum is the same as that on the masking tape. This indicates that the emissivity of both is the same, here taken as 0.95.

Lamp measurement report – 22 Nov 2010

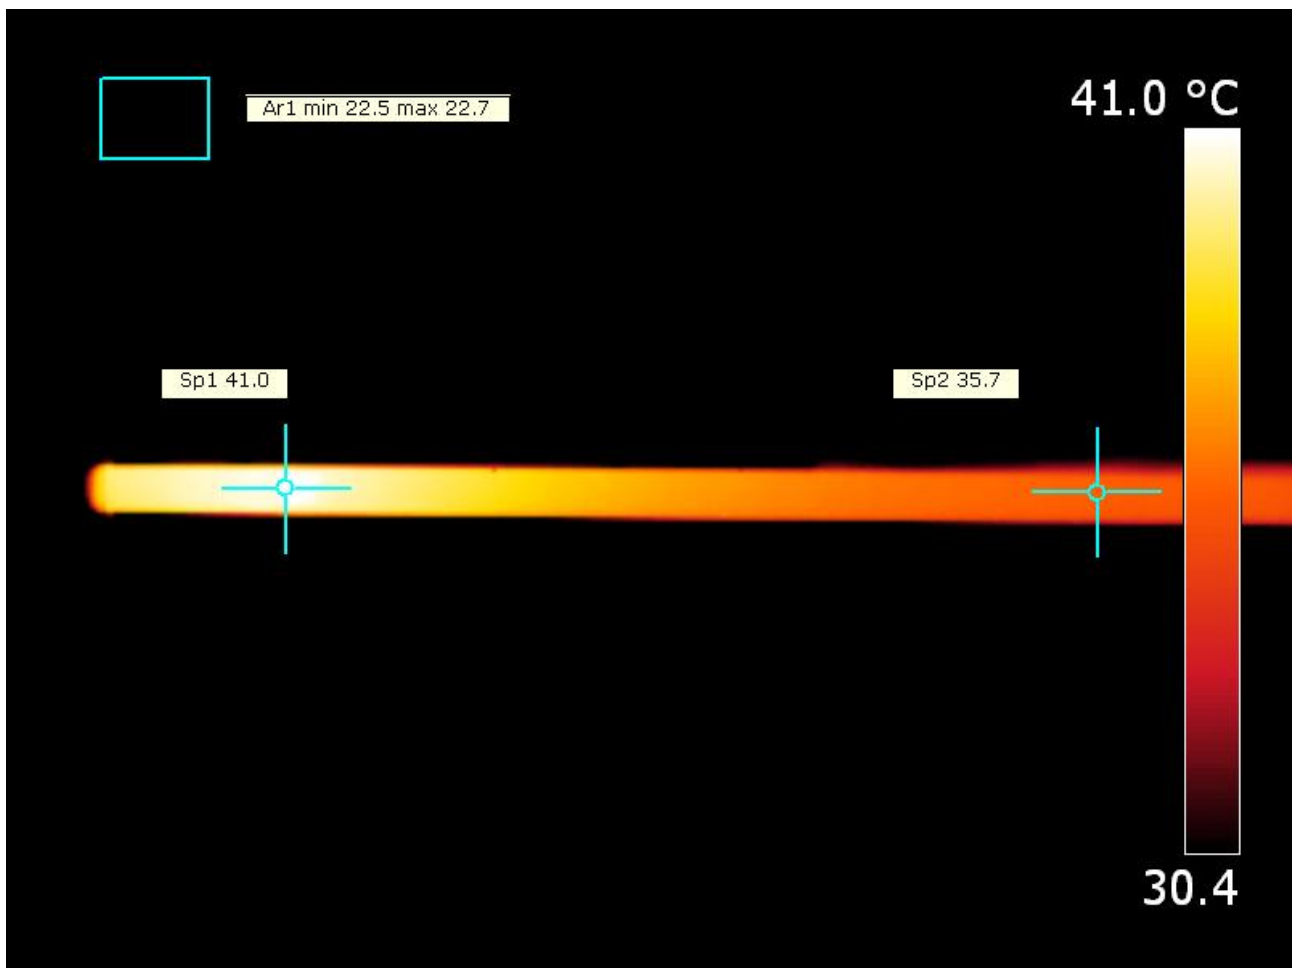

Lamp measurement report – 22 Nov 2010

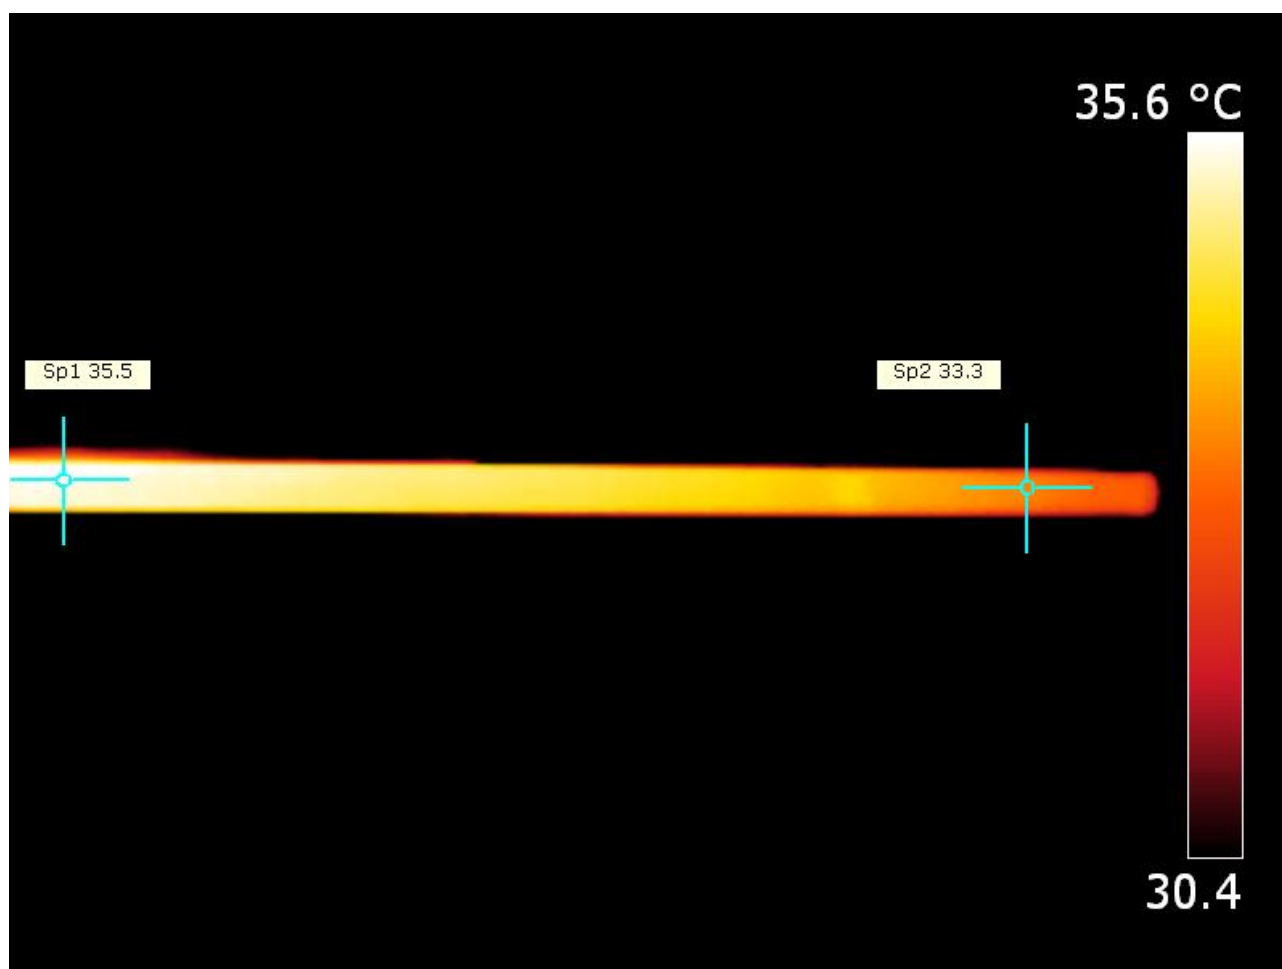

The metal part measured over its length.


The tube has different temperatures over its length, the difference is about 8 degrees between the hottest and coldest point.

status lamp	> 2 hours on
ambient temperature	22.5 deg C
reflected background temperature	22.5 deg C
camera	Flir T335
emissivity	0.95 ⁽¹⁾
measurement distance	1 m
IFOV _{geometric}	0.136 mm per 0.1 m distance
NETD (thermal sensitivity)	50 mK

⁽¹⁾ See the text for explanation.

Lamp measurement report – 22 Nov 2010

Color temperature and Spectral power distribution

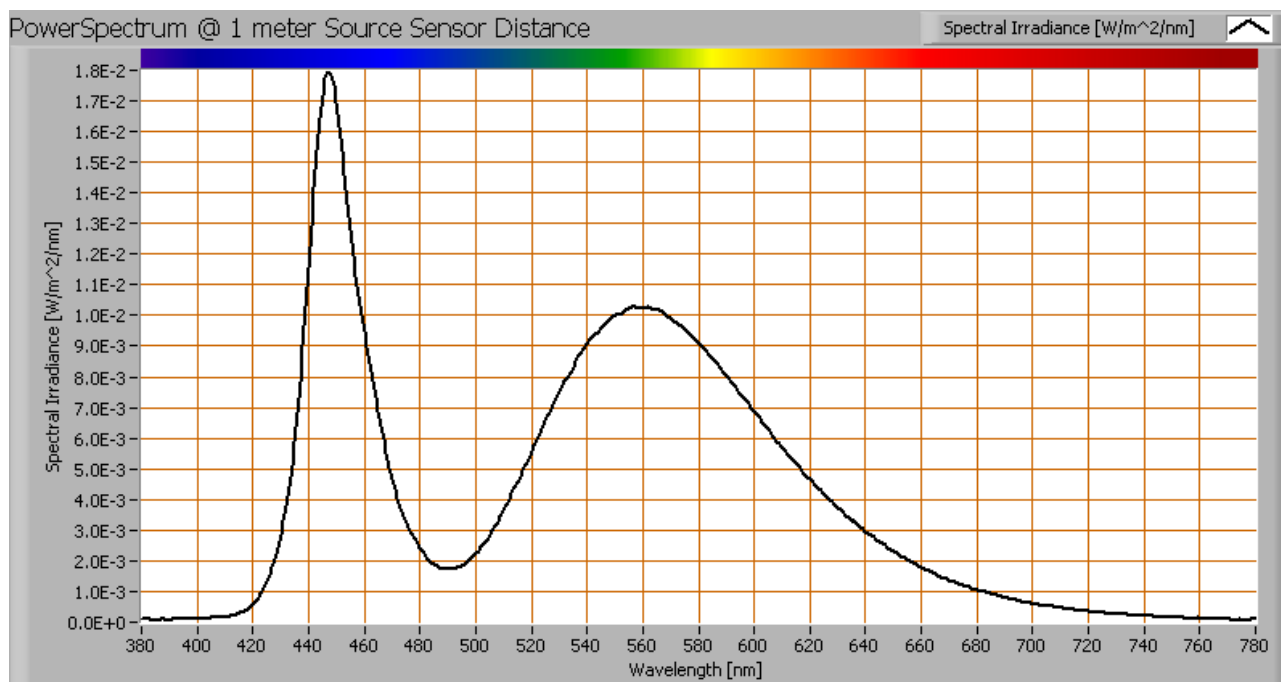


The spectral power distribution of this light bulb, energies on y-axis valid at 1 m distance.

The measured color temperature is about 6100 K which is cold white.

This color temperature is measured straight underneath the light bulb. Below a graph showing the color temperature for different inclination angles.

Lamp measurement report – 22 Nov 2010

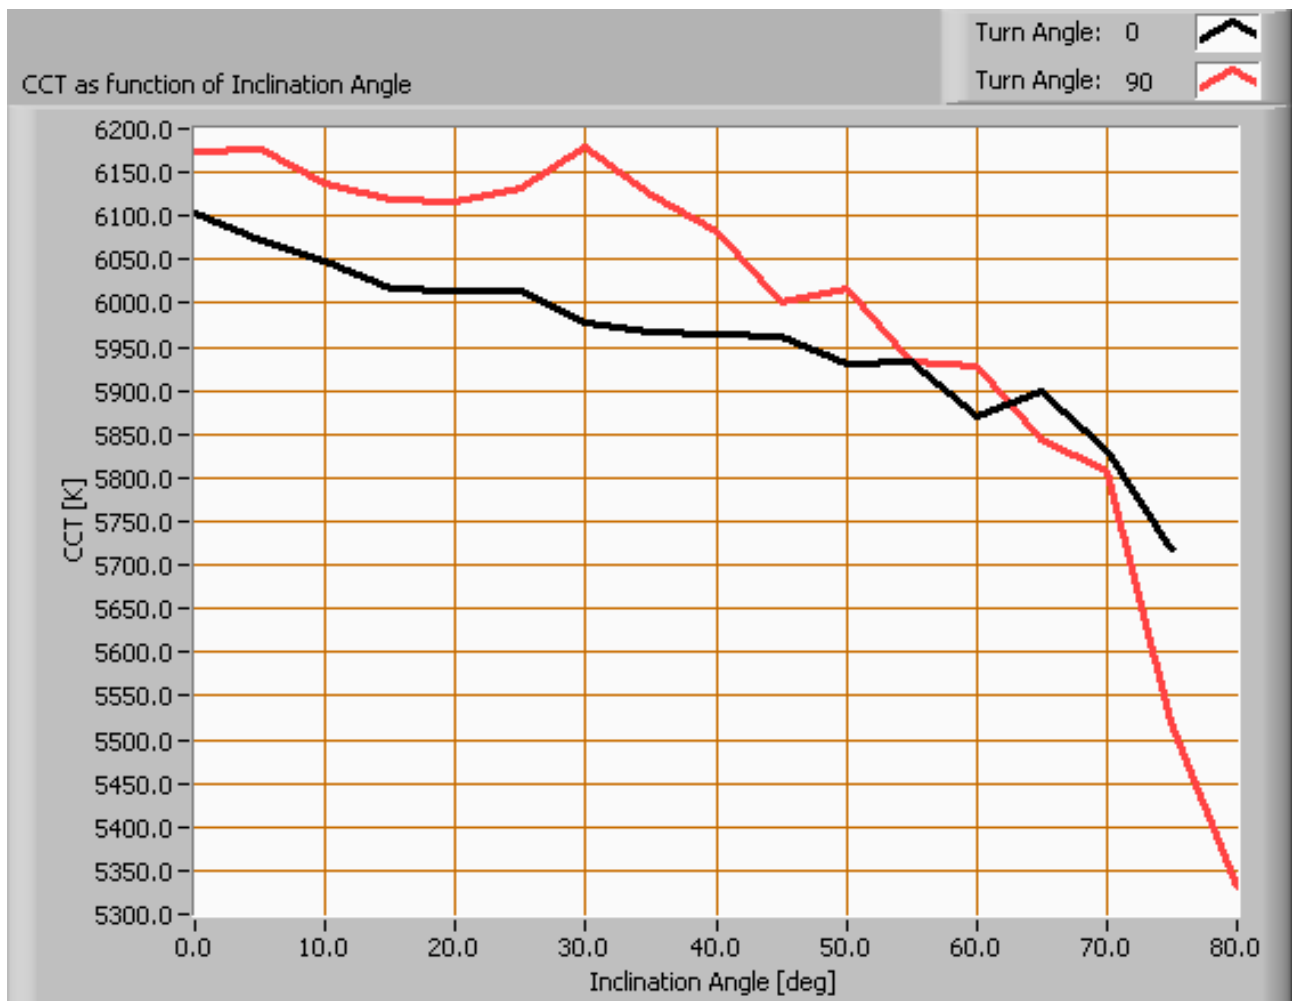

Color temperature as a function of inclination angle.


The measurement of CCT is measured for inclination angles up to 75°. Beyond this angle the illuminance is very low (< 5 lux).

The beam angle is 118°, meaning a 59° inclination angle. In this area most of the light is present. The variation in correlated color temperature in this area is about 4 %.

Lamp measurement report – 22 Nov 2010

PAR value and PAR spectrum

To make a statement how well the light of this light bulb is for growing plants, the PAR-area needs to be determined. See the OLiNo website how this all is determined and the explanation of the graph.

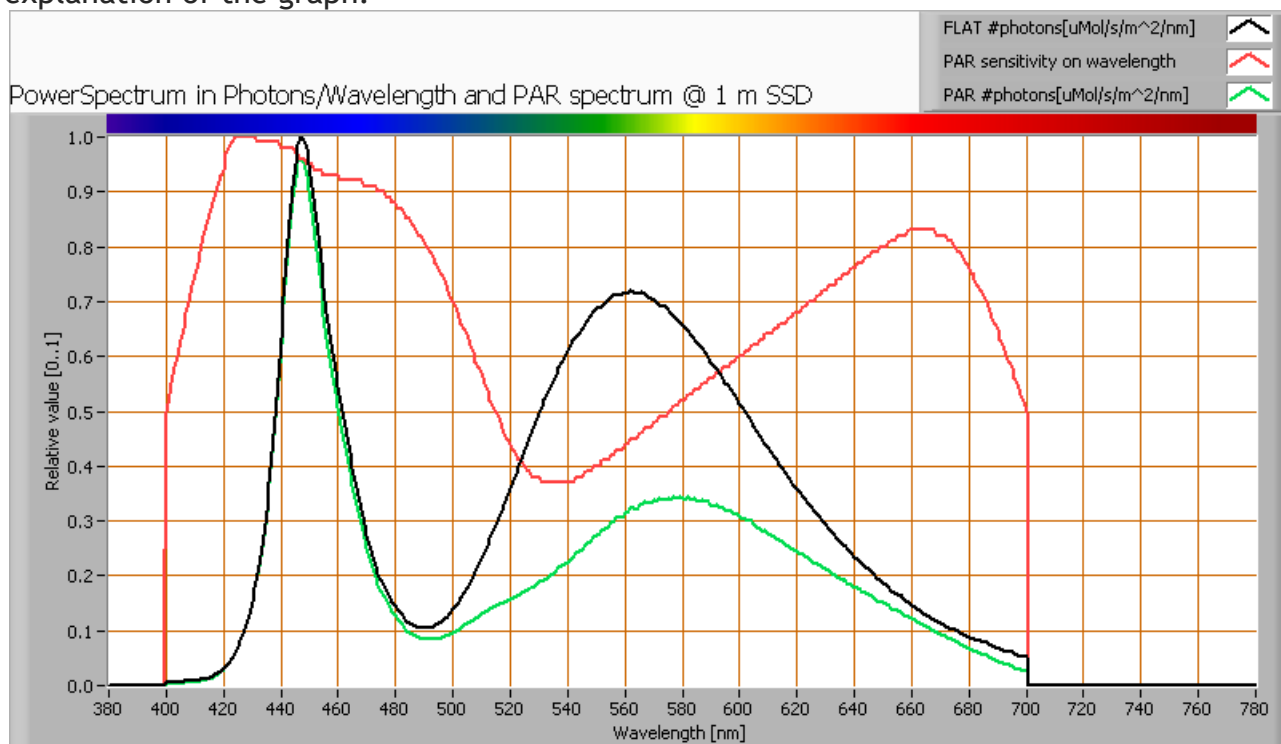

The photon spectrum, then the sensitivity curve and as result the final PAR spectrum of the light of this light bulb


parameter	value	unit
PAR-number	4.6	$\mu\text{Mol/s/m}^2$
PAR-photon current	14.2	$\mu\text{Mol/s}$
PAR-photon efficacy	0.8	$\mu\text{Mol/s/W}$

The PAR efficiency is 65 % (valid for the PAR wave length range of 400 - 700 nm). So maximally 65 % of the total of photons in the light is effectively used by the average plant (since the plant might not take 100 % of the photons at the frequency where its relative sensitivity is 100 %).

Lamp measurement report – 22 Nov 2010

S/P ratio

The S/P ratio and measurement is explained on the OliNo website. Here the results are given.

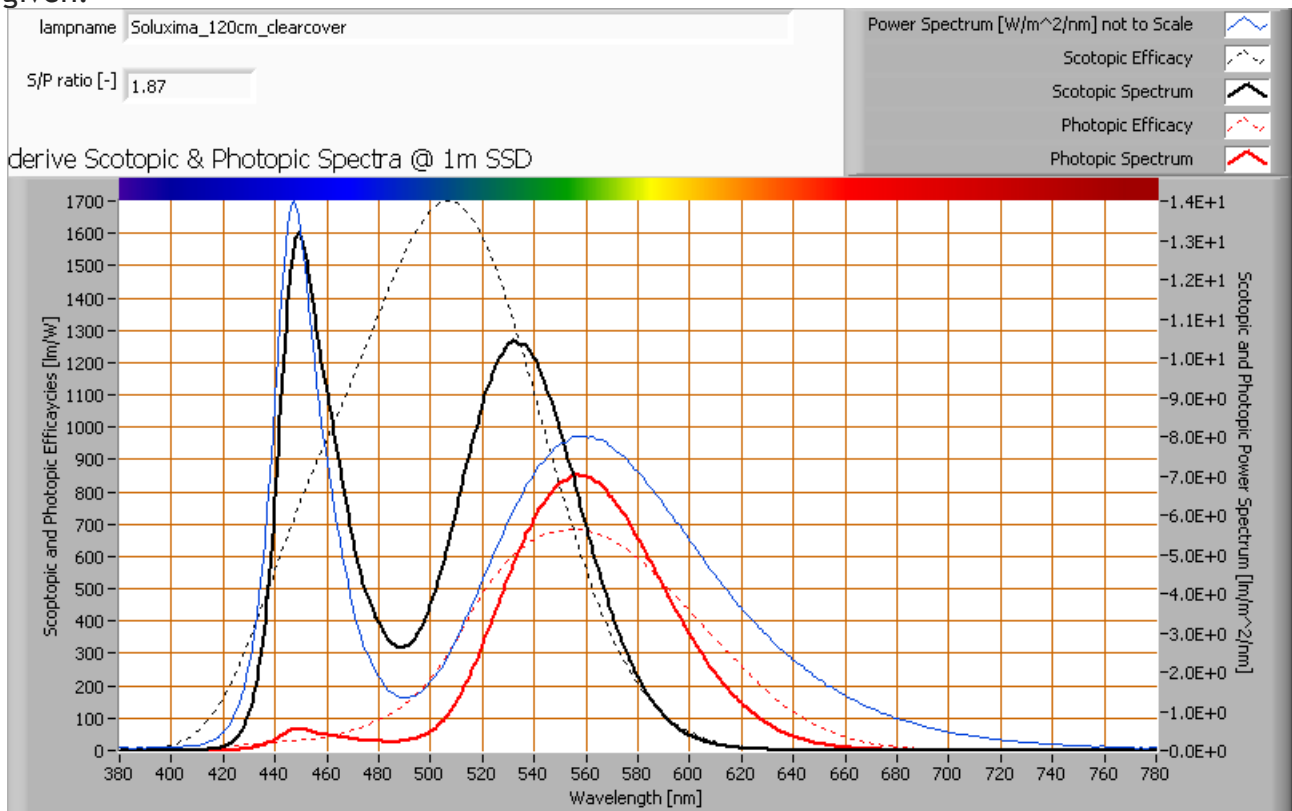


The power spectrum, sensitivity curves and resulting scotopic and photopic spectra (spectra energy content defined at 1 m distance).

The S/P ratio is 1.9.

More info on S/P ratio can be found on the OliNo website.

Lamp measurement report – 22 Nov 2010

Chromaticity diagram

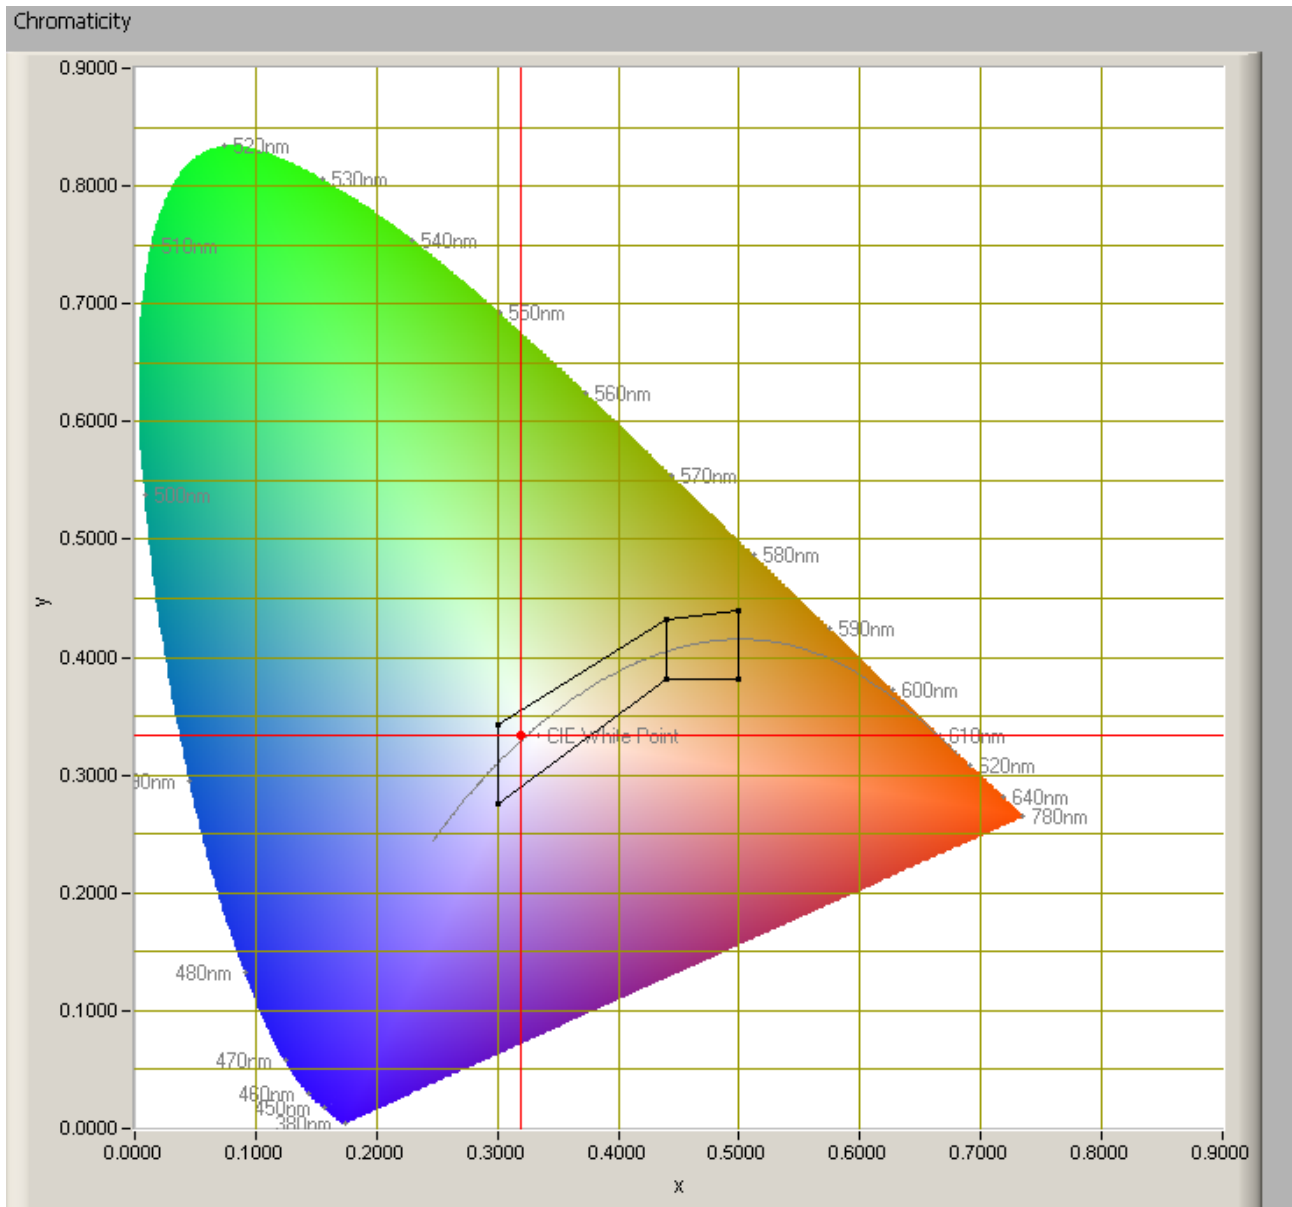

The chromaticity space and the position of the lamp's color coordinates in it.

The light coming from this lamp is inside the area of class A. This is an area defined for signal lamps, see also the OliNo website.

Its coordinates are $x=0.3197$ and $y=0.3341$.

Lamp measurement report – 22 Nov 2010















Color Rendering Index (CRI) or also Ra

Herewith the image showing the CRI as well as how well different colors are represented (rendered). The higher the number, the better the resemblance with the color when a black body radiator would have been used (the sun, or an incandescent lamp). Practical information and also some critics about the CRI can be found on the OLiNo website. Each color has an index Rx, and the first 8 indexes (R1 .. R8) are averaged to compute the Ra which is equivalent to the CRI.

☐ manual

Reference Illuminant: Planckian radiator CCT: 6112 K

Chromaticity Difference DC= 7.7E-4

R1= 59		R8= 49	
R2= 70.7		R9= -65.3	
R3= 75.1		R10= 27	
R4= 61.8		R11= 52.6	
R5= 60.4		R12= 28	
R6= 57.2		R13= 60.9	
R7= 77.8		R14= 85.7	

Ra
(mean value of R1 - R8)
63.9

CRI of the light of this lightbulb.

The value of 64 is lower than to the value 80 which is considered a minimum value for indoor usage.


Note: the chromaticity difference is 0.0008 indicates the distance to the Planckian Locus. There is no norm yet that states what the max deviation from white light is allowed to be. A reference with signal lights as a reference is given in the chromaticity diagram.

Voltage dependency

The dependency of a number of lamp parameters on the lamp voltage is determined. For this, the lamp voltage has been varied and its effect on the following light bulb

Lamp measurement report – 22 Nov 2010

parameters measured: illuminance E_v [lx], the lamp power P [W] and the luminous efficacy [lm/W].

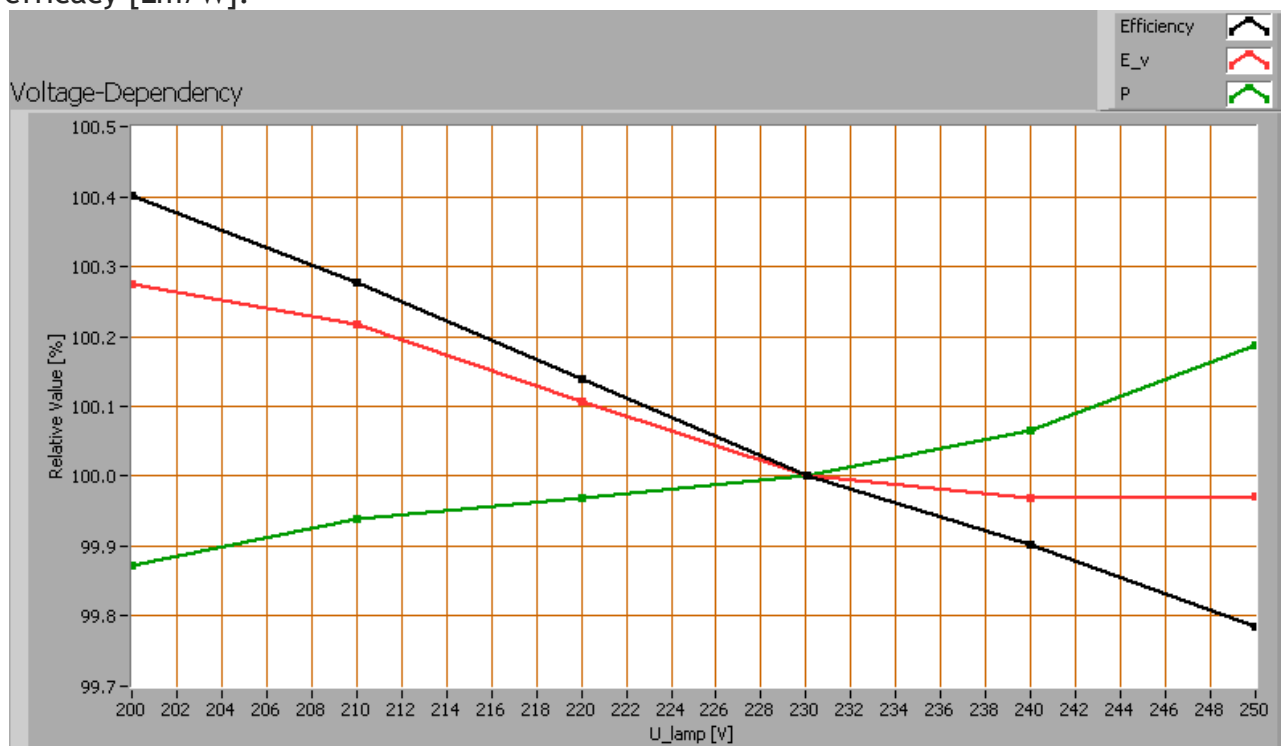


Lamp voltage dependencies of certain light bulb parameters, where the value at 230 V is taken as 100 %.

The illuminance and consumed power vary insignificantly when the voltage is varied. When the voltage at 230 V varies with + and - 5 V, then the illuminance varies < 0.1 %, so when abrupt voltage changes occur this effect is not visible in the illuminance output.

Warm up effects

After switch on of a cold lamp, the effect of heating up of the lamp is measured on illuminance E_v [lx], the lamp power P [W] and the luminous efficacy [lm/W].

Lamp measurement report – 22 Nov 2010

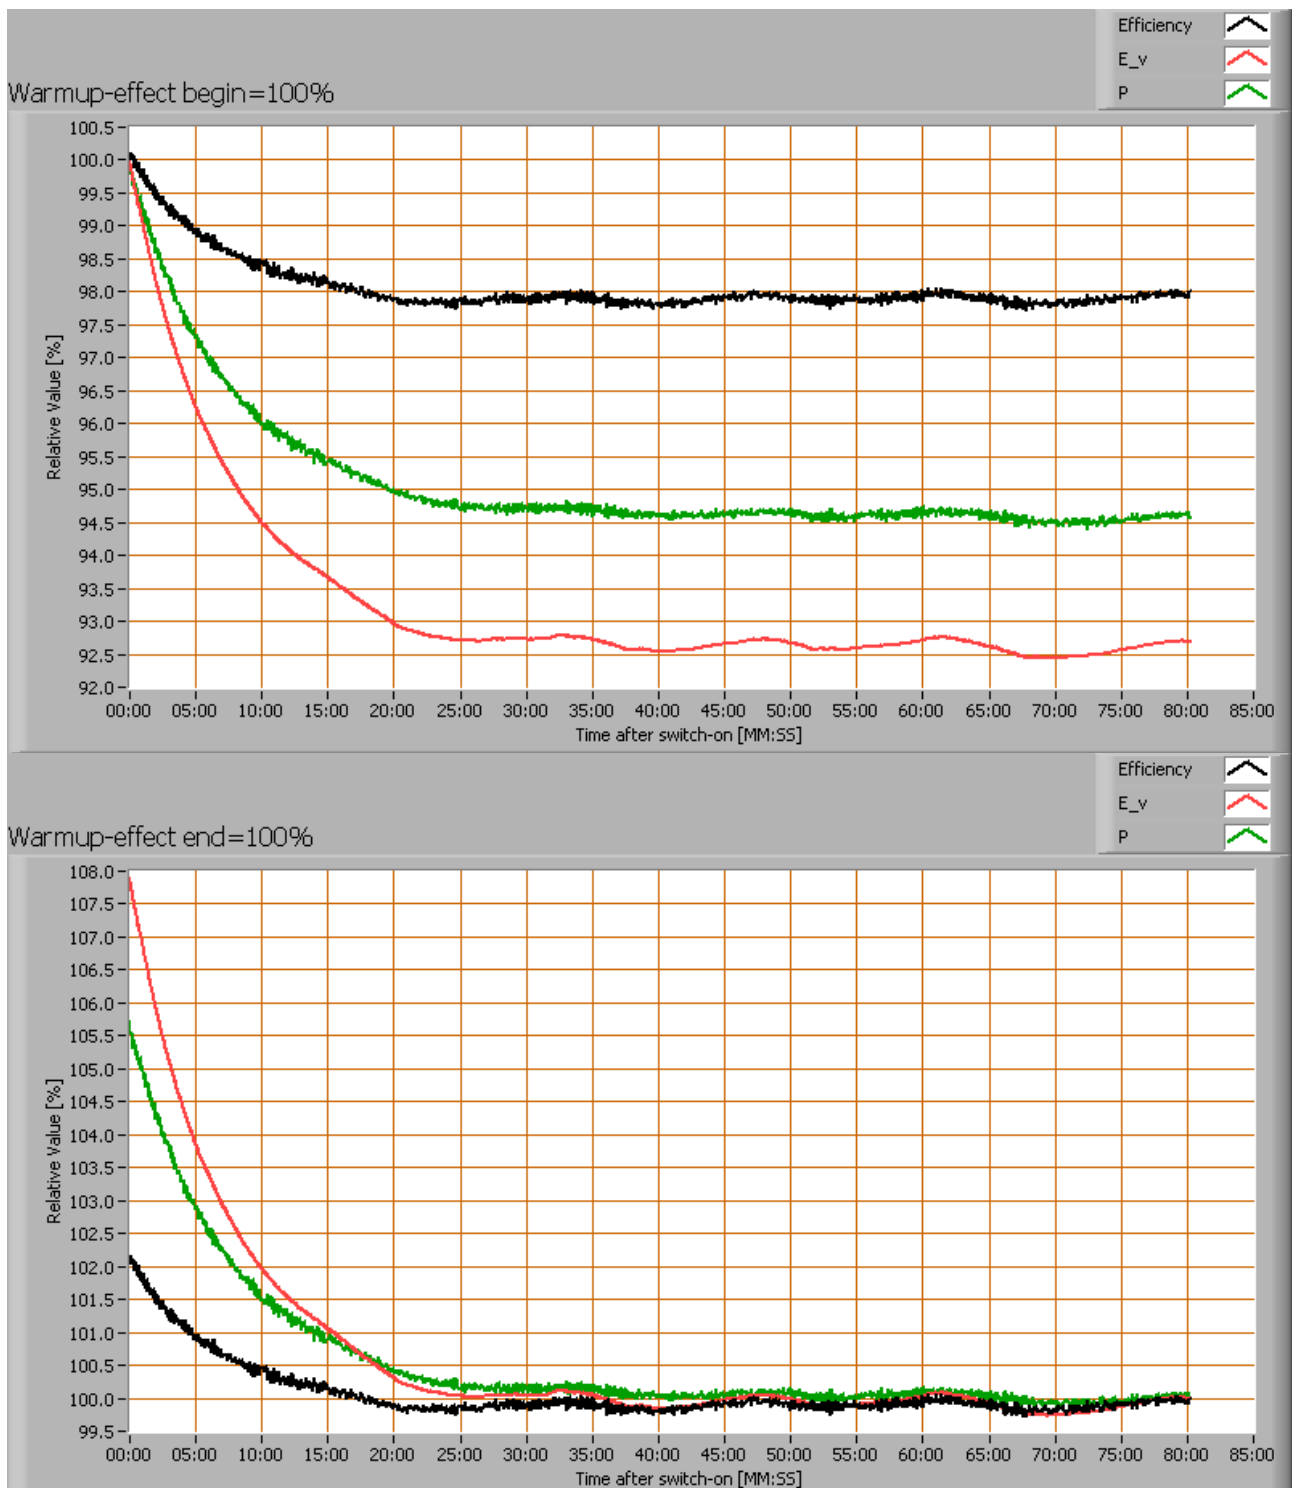

Effect of warming up on different light bulb parameters. At top the 100 % level is put at begin, and at bottom at the end.




Lamp measurement report – 22 Nov 2010

The warm up time is 25 minutes and during that time the illuminance decreases with 7 % and the consumed power with 5 %.

Measure of flickering

An analysis is done on the measure of flickering of the light output by this light bulb. See the OliNo site for more information.

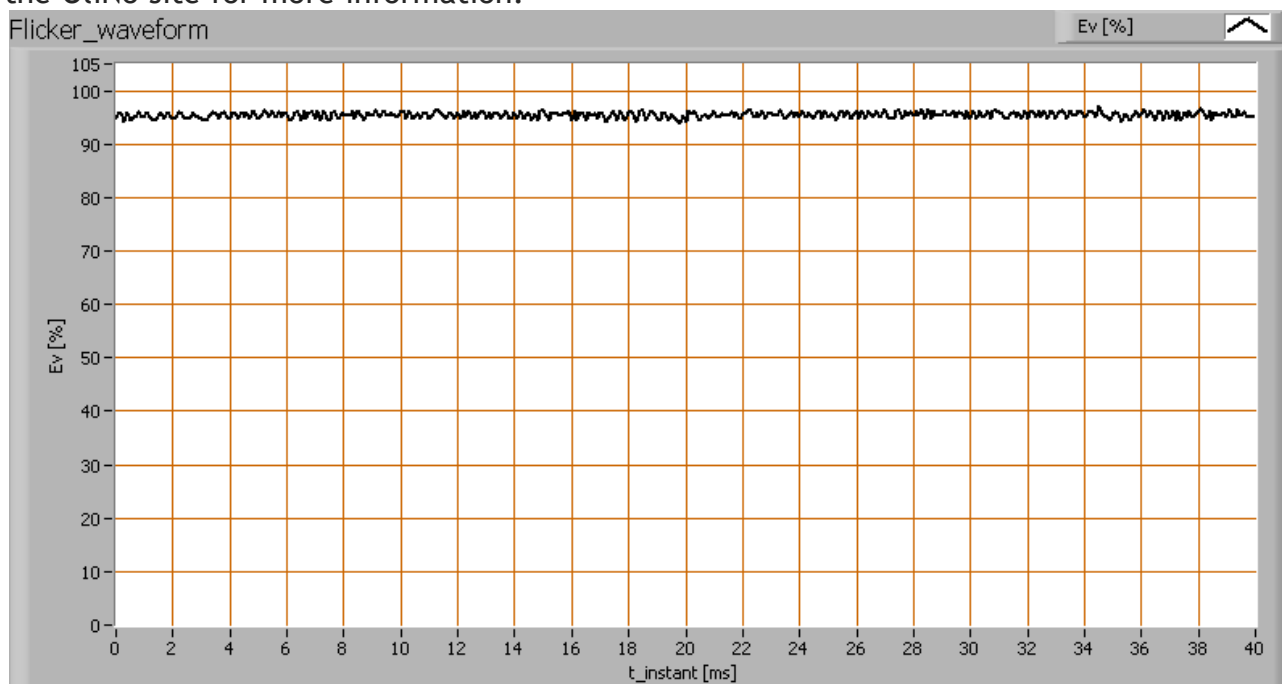

The measure of fast illuminance variation of the light of the light bulb

parameter	value	unit
Flicker frequency	4357	Hz
Illuminance modulation index	2	%

The illuminance modulation index is computed as: $(\text{max_Ev} - \text{min_Ev}) / (\text{max_Ev} + \text{min_Ev})$.

Lamp measurement report – 22 Nov 2010

Additional photo's



View on the back side of the lamp

Disclaimer

The information in this OliNo report is created with the utmost care. Despite this, the information could contain inaccuracies. OliNo cannot be held liable in this instance nor can the data in this report be legally binding.

We strive to adhere to all of the conditions of any copyright holder in the publication of any illustration/article or item. In the event that we unintentionally violate said copyright holder's conditions in our articles, we kindly ask to be contacted here at OliNo so that we can resolve any disputes, issues or misunderstandings.

License

It is permitted ONLY to use or publish this report in its entirety and in unaltered form via internet or other digital or written media in any form. To guarantee the reliability and accuracy of the report, it is strictly probited to change or alter parts of the report and/or republish it in a modified content.