



Lamp measurement report – 2 Jan 2011

PL LP 600 x 600 W LED Lightpanel

by

EleктоLED

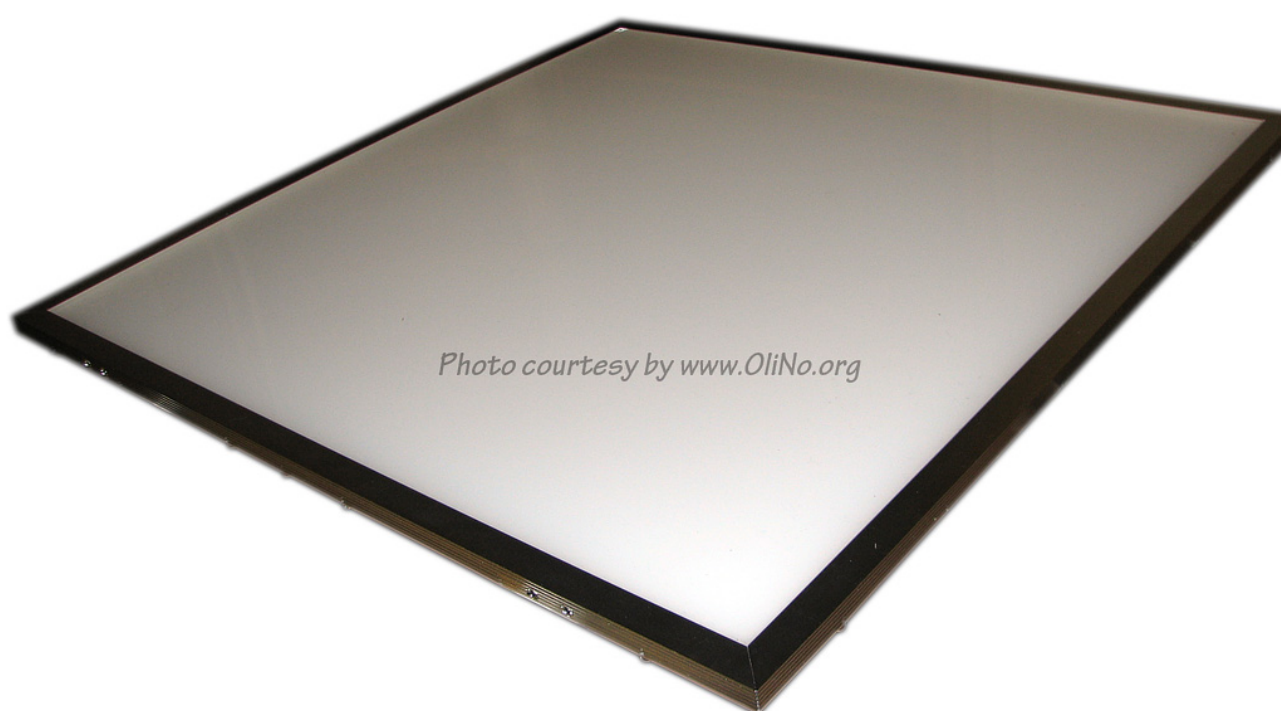


Photo courtesy by www.OliNo.org



Lamp measurement report – 2 Jan 2011

Summary measurement data

parameter	meas. result	remark
Color temperature	4984 K	neutral white
Luminous intensity I_v	801.1 Cd	Measured straight underneath the lamp.
Illuminance modulation index	0 %	Measured with a light sensor looking at the lamp (angle not defined). Is a measure for the amount of flickering.
Beam angle	120 deg	116 deg is the beam angle for the C0-C180-plane (perpendicular to the length direction of the lamp) and 120 deg is the beam angle for the C90-C270 plane, which is along the length direction of the lamp.
Power P	36.7 W	Follow the link for more information on electrical properties.
Power Factor	0.66	An electrical load with this power factor means that for every 1 kWh net energy consumed, there has been 1.13 kVAh for reactive energy.
THD	102 %	Total Harmonic Distortion.
Luminous flux	2439 lm	
Luminous efficacy	66 lm/W	
EU-label classification	A	The energy class, from A (more efficient) to G (least efficient).
CRI_Ra	69	Color Rendering Index.
Coordinates chromaticity diagram	x=0.3504 en y=0.3875	
Fitting	230V	This lamp is connected via an external power supply to the grid voltage.
PAR-value	6.5 $\mu\text{Mol/s/m}^2$	The number of photons seen by an average plant when it is lit by the light of this light bulb. Value valid at 1 m distance from light bulb.




Lamp measurement report – 2 Jan 2011

PAR-photon efficacy	0.5 $\mu\text{Mol/s/W}_e$	The total emitted number of photons by this light, divided by its consumption in W. It indicates a kind of efficacy in generating photons.
S/P ratio	1.7	This factor indicates the amount of times more efficient the light of this light bulb is perceived under scotopic circumstances (low environmental light level).
L x W x H external dimensions	600 mm x 600 mm x 16 mm	External dimensions of the lamp.
L x W luminous area	540 mm x 540 mm	Dimensions of the luminous area (used in Eulumdat file). The light comes from the bright white plate from the front.
General remarks		<p>The ambient temperature during the whole set of illuminance measurements was 23.4 - 24.9 deg C.</p> <p>The temperature of the housing of the power supply gets maximally about 20 degrees hotter than ambient temperature. The panel itself doesn't get hot: only about 5 degrees warmer than ambient.</p> <p>Warm up effect: during the warm up time the illuminance decreases about 7 % and the consumed power decreases about 4 %.</p> <p>Voltage dependency: There is no (significant) dependency of the illuminance when the power voltage varies between 200 - 250 V AC. There is no (significant) dependency of the consumed power when the power voltage varies between 200 - 250 V AC.</p> <p>At the end of the article an additional photo.</p>

Lamp measurement report – 2 Jan 2011

Overview table

m.	Ø 50%		CO-180: 116° C90-270: 120° 	E (lux)	Luminaire Efficacy
	CO-180	C90-270			66 (lumen per Watt)
0.25	0.81	0.86		12818	Half-peak diam CO-180
0.5	1.61	1.73		3205	3.23 x diameter(m)
1	3.23	3.46		801	Half-peak diam C90-270
1.5	4.84	5.18		356	3.46 x diameter(m)
3	9.68	10.37		89	Illuminance
4	12.91	13.83		50	801 / distance ² (lux)
5	16.14	17.28		32	Total Output
					2439 (lumen)


The overview table is explained on the OliNo website.

Please note that this overview table makes use of calculations, use this data with care as explained on the OliNo site. E (lux) values are not accurate, when within 5 x 764 mm (maximal luminous size, eventually diagonally measured)= 3820 mm. Within this distance from the lamp, the measured lux values will be less than the computed values in this overview as the measurements are then within the near field of the lamp.


EU Energy label classification

With the measurement results of the luminous flux and the consumed power the classification on energy efficacy of this lamp is calculated. This information is requested in the EU for certain household lamps, see also the OliNo site that explains for which lamps it is requested, how the label looks like and what information it needs to contain. Herewith the labels for this lamp in color and black and white.

Lamp measurement report – 2 Jan 2011

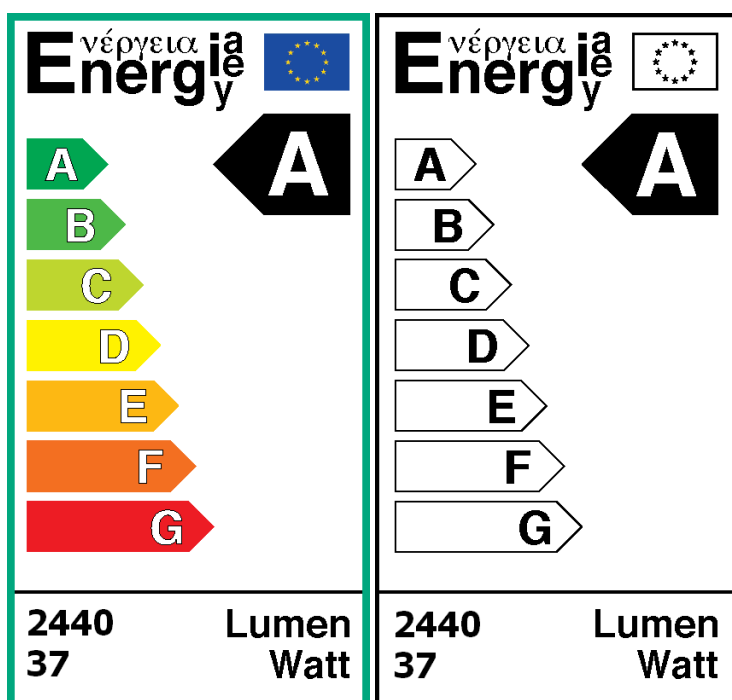

EU energy label of this lamp

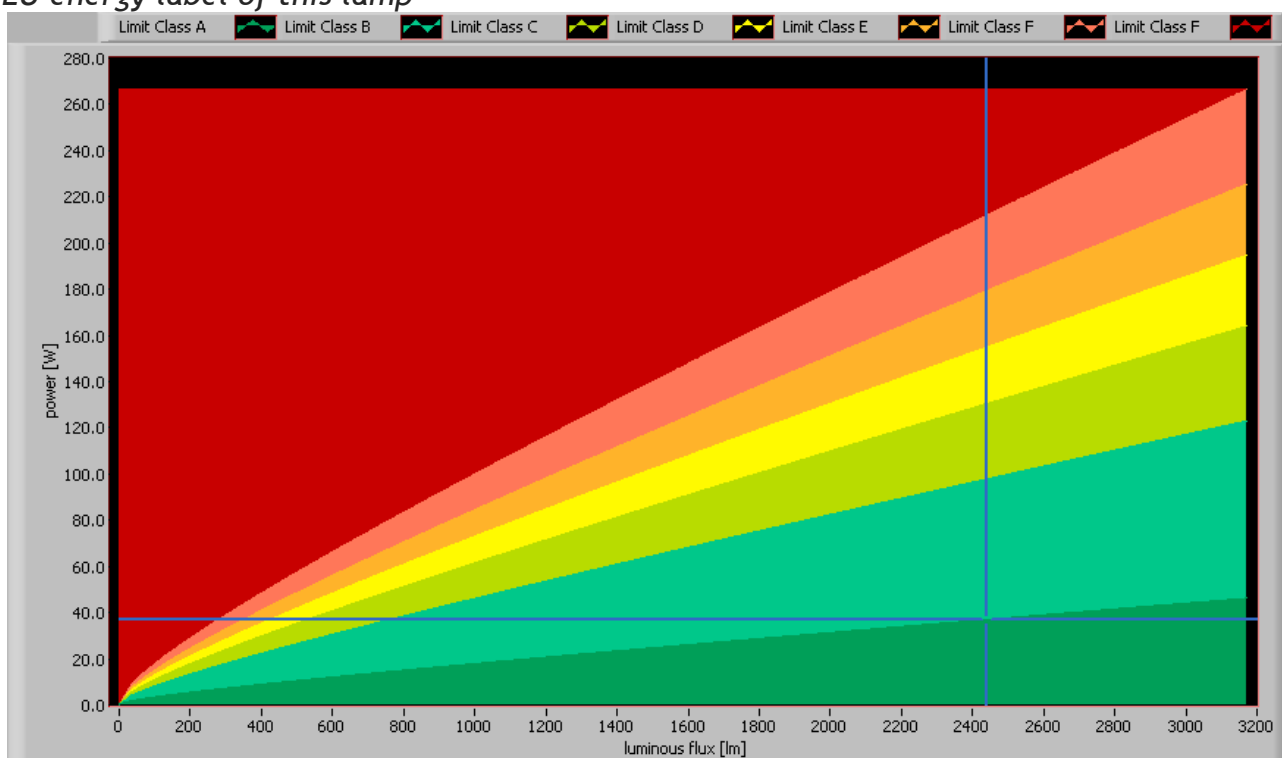


The lamp's performance in the lumen-Watt field, with the energy efficacy fields indicated.

Lamp measurement report – 2 Jan 2011

Eulumdat light diagram

This light diagram below comes from the program Qlumedit, that extracts these diagrams from an Eulumdat file. This light diagram is explained on the OliNo site.

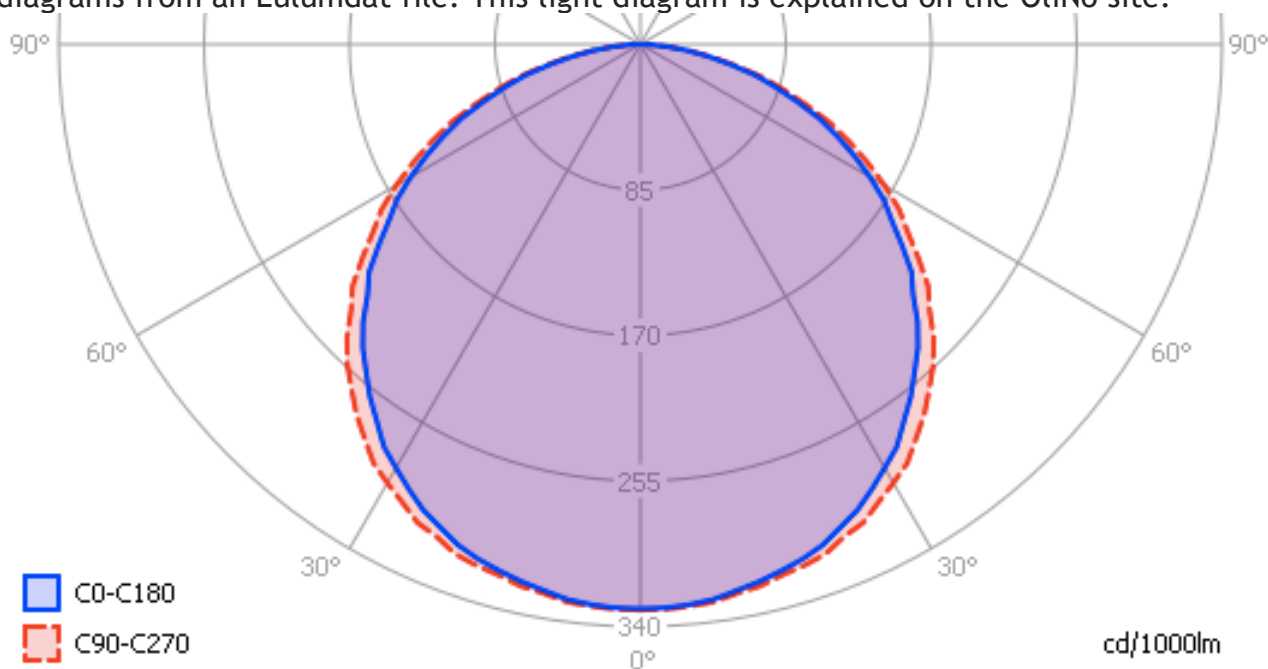


The light diagram giving the radiation pattern.

The light diagram indicates the beam in the C0-C180 plane (perpendicular to the length direction of the lamp) and in the plane perpendicular to that, the C90-C270 plane (along the length direction of the lamp).

Illuminance E_v at 1 m distance, or luminous intensity I_v

Herewith the plot of the *averaged* luminous intensity I_v as a function of the inclination angle with the light bulb.


Lamp measurement report – 2 Jan 2011

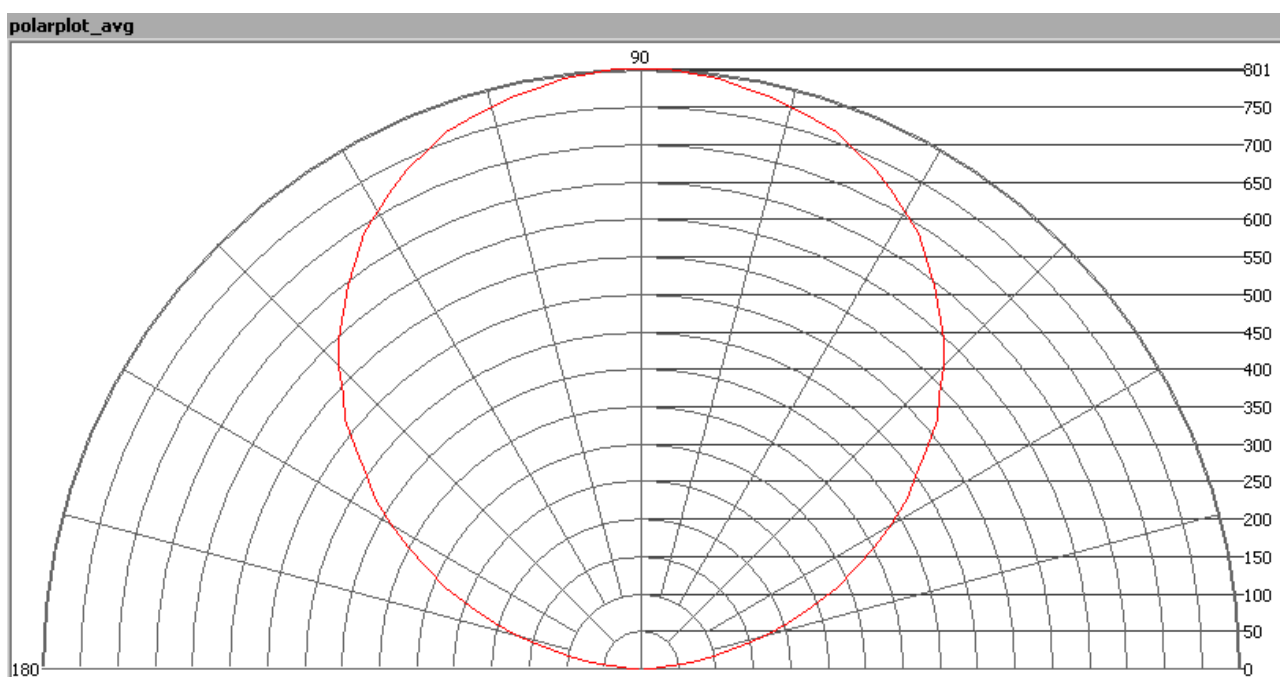

The radiation pattern of the light bulb.

This radiation pattern is the average of the light output of the light diagram given earlier. Also, in this graph the luminous intensity is given in Cd.

These averaged values are used (later) to compute the lumen output.

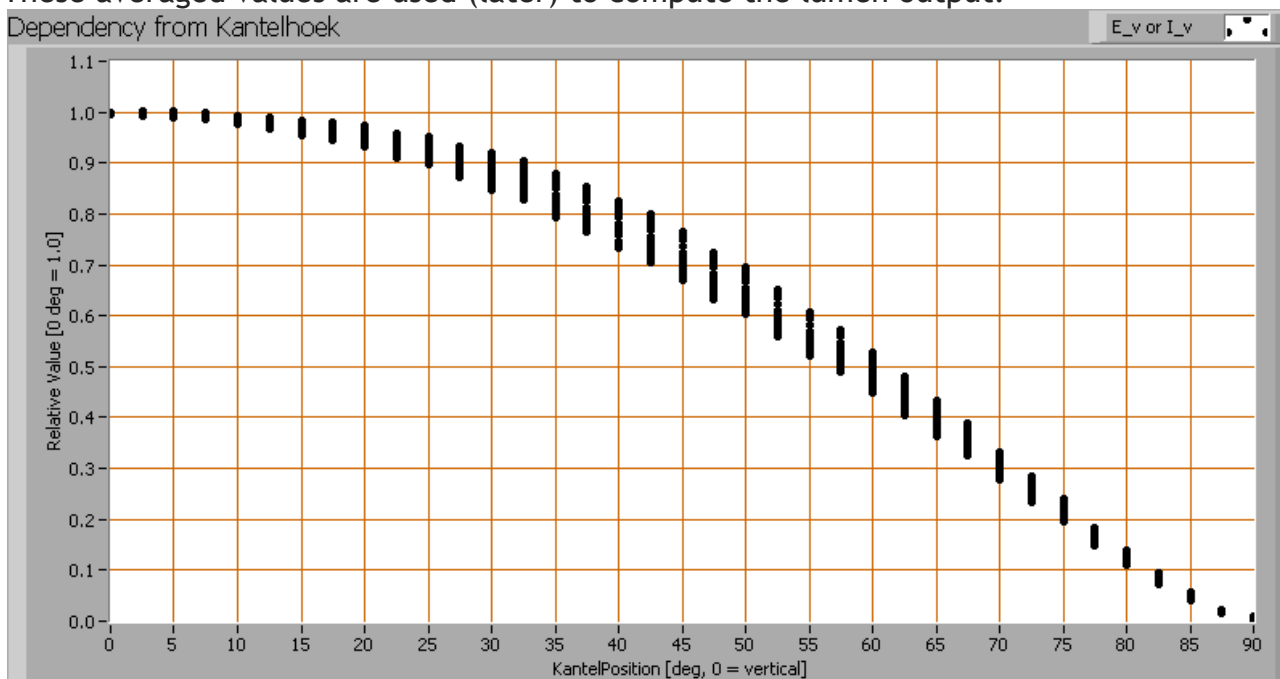

Intensity data of every measured turn angle at each inclination angle.



Lamp measurement report – 2 Jan 2011

This plot shows per inclination angle the intensity measurement results for each turn angle at that inclination angle. There normally are differences in illuminance values for different turn angles. However for further calculations the averaged values will be used. When using the average values per inclination angle, the beam angle can be computed, being 116 deg for the C0-C180 plane and 120 deg for the C90-C270 plane.

Luminous flux

With the averaged illuminance data at 1 m distance, taken from the graph showing the averaged radiation pattern, it is possible to compute the luminous flux.

The result of this computation for this light spot is a luminous flux of 2439 lm.

Luminous efficacy

The luminous flux being 2439 lm, and the consumed power of the lamp being 36.7 Watt, results in a luminous efficacy of 66 lm/Watt.


Electrical properties

The power factor is 0.66. An electrical load with this power factor means that for every 1 kWh net energy consumed, there has been 1.13 kVAhr for reactive energy.

Lamp voltage	230.0 V
Lamp current	0.242 A
Power P	36.7 W
Apparent power S	55.6 VA
Power factor	0.66

Of this lamp the voltage across and the resulting current through it are measured and graphed. See the UI acquisition on the OLiNo site how this is obtained.


Lamp measurement report – 2 Jan 2011

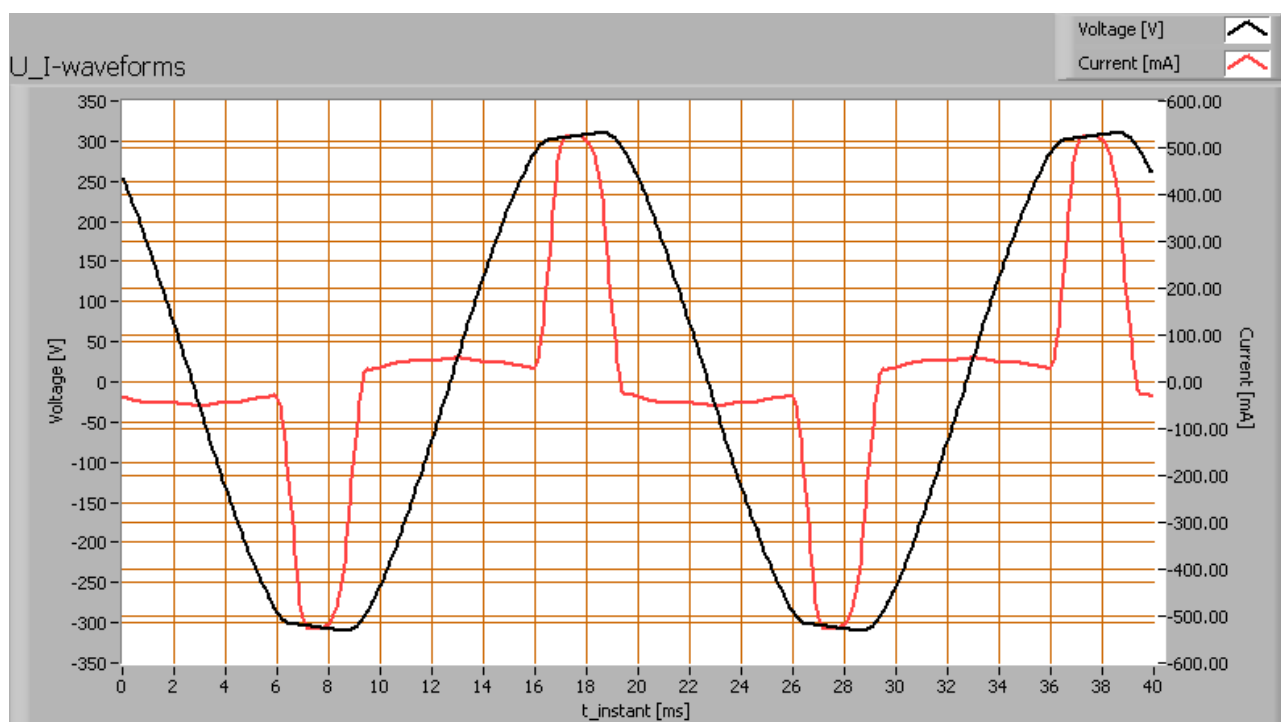

Voltage across and current through the lightbulb

This current waveform has been checked on requirements posed by the norm IEC 61000-3-2:2006 (including up to A2:2009). See also the IEC 61000-3-2:2006 explanation on the OLiNo website.

Lamp measurement report – 2 Jan 2011

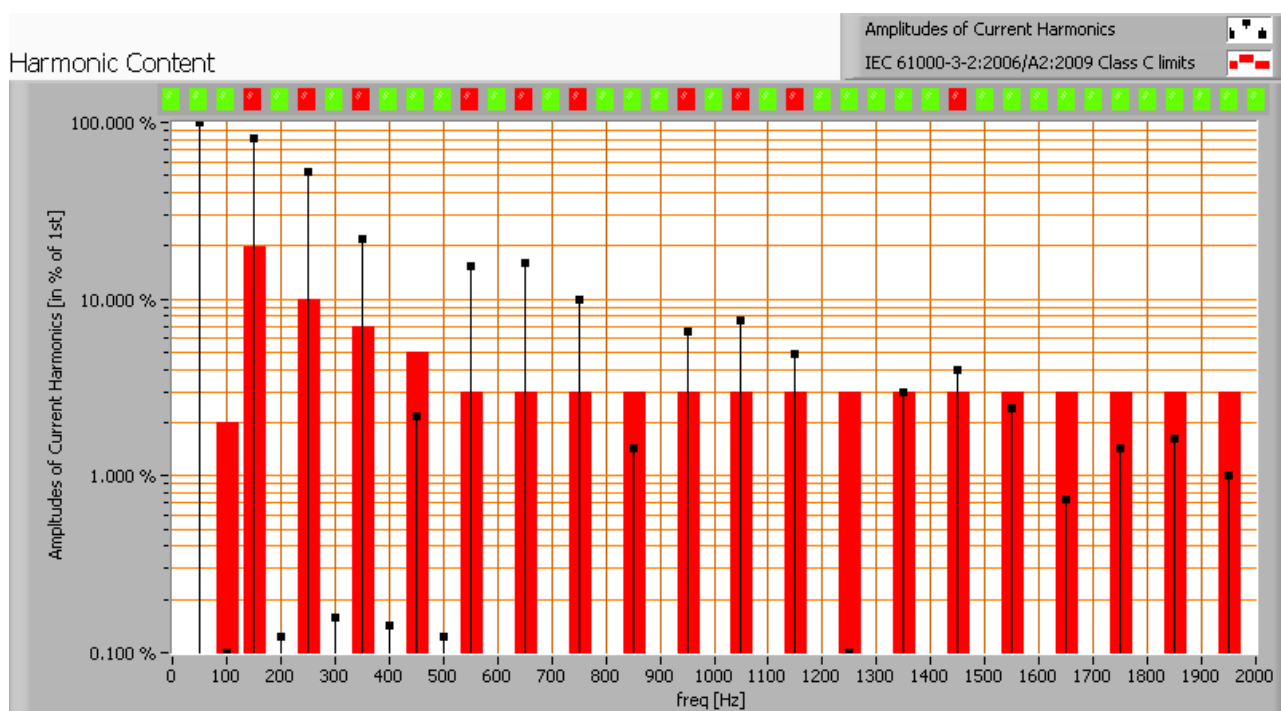


Harmonics in the current waveform and checked against IEC61000-3-2:2006 and A2:2009

When the consumed power is > 25 W there are limits for the harmonics and those are not respected. See the note for additional explication.

The Total Harmonic Distortion of the current is computed and its value is 102 %.

Note: the used lampvoltage in this test is not clean enough to be able to well evaluate the results of the current harmonics according to this norm; this is because the used voltage has (a little) too much harmonic content itself, which results in worse results for the current harmonics. Herewith the image showing the harmonic content of the voltage used. It becomes clear that there are not many harmonics in the voltage applied so the result for the current compared with the norm must be seen then as a serious indication.


Lamp measurement report – 2 Jan 2011

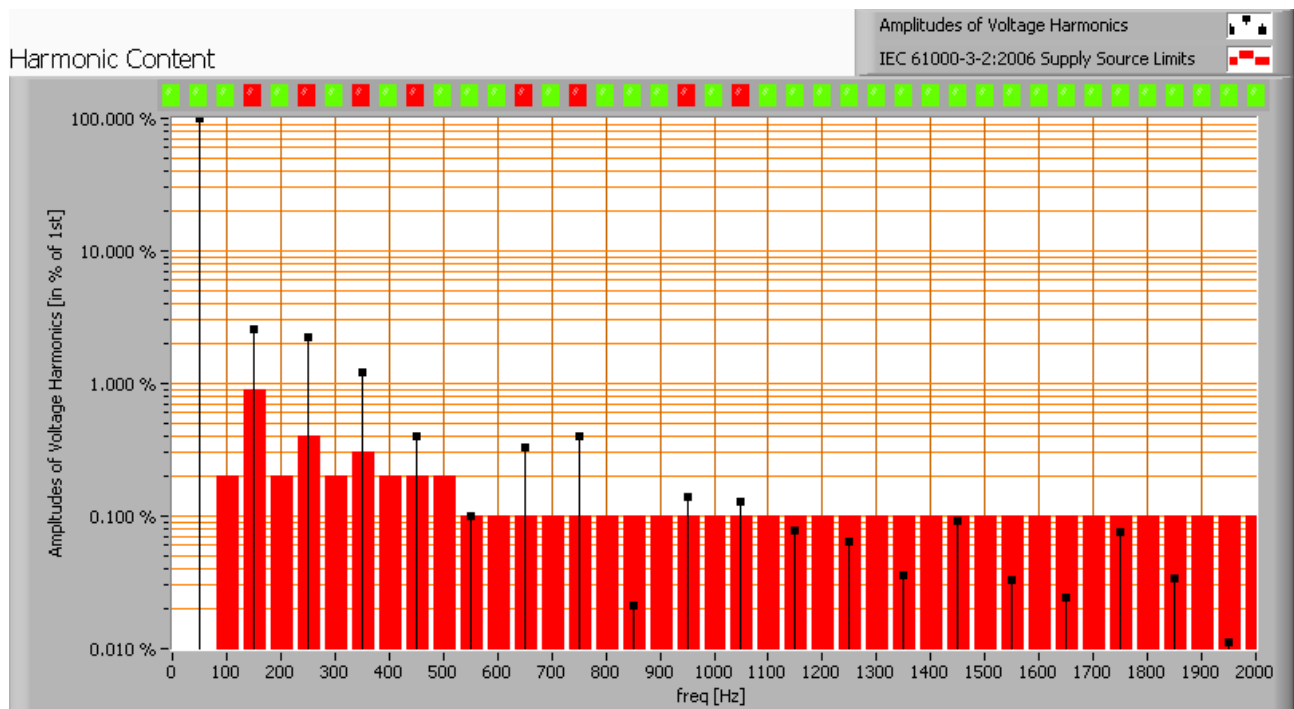

Harmonics in the voltage waveform and checked against IEC61000-3-2:2006 and A2:2009.

Lamp measurement report – 2 Jan 2011


Temperature measurements lamp

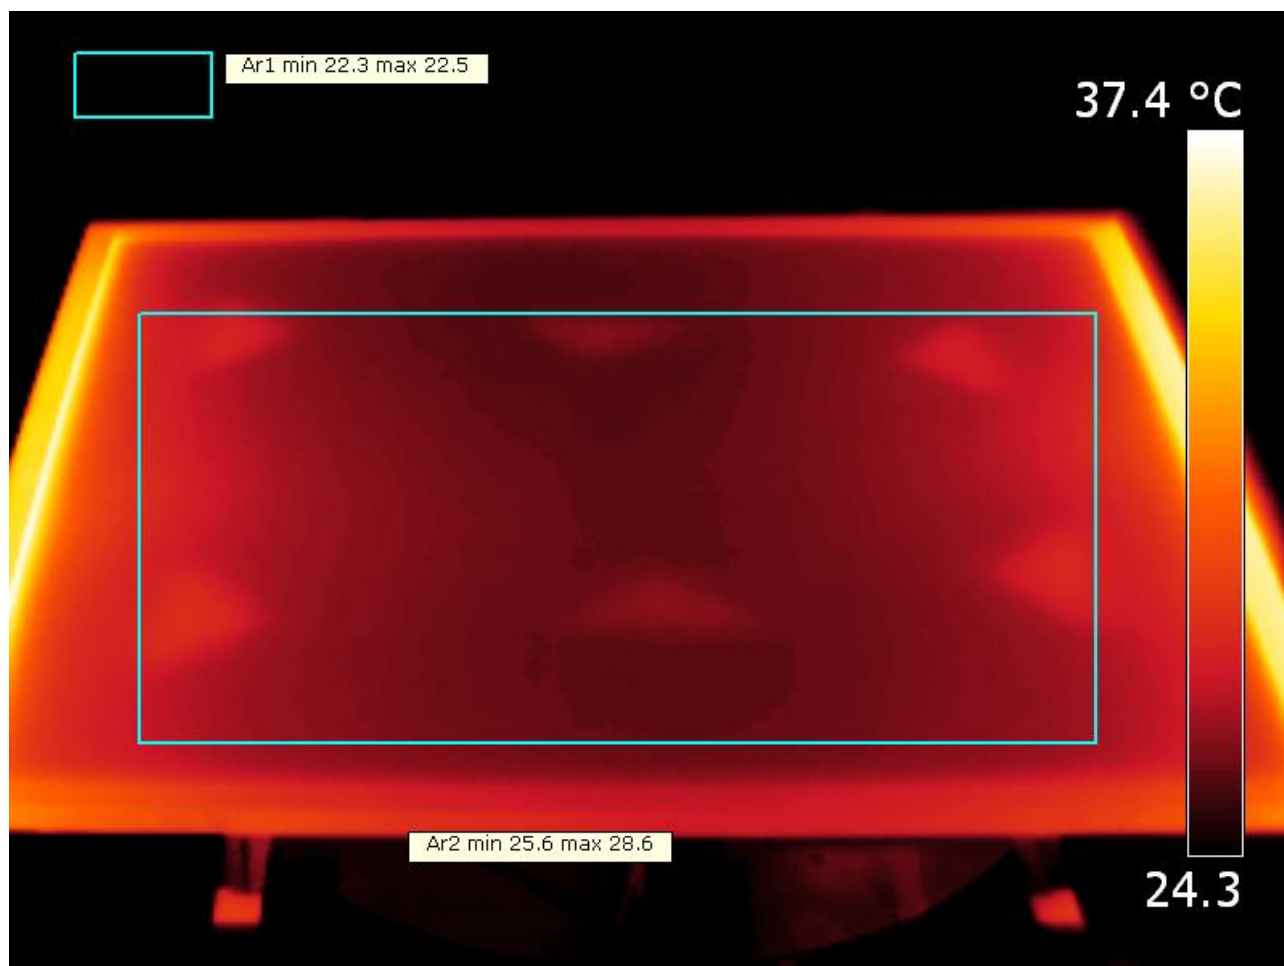

Overview of the front plate.

Emissivity of the aluminum borders is about 0.7. The front plate itself 0.95. The temperature gets little hotter than ambient.


Lamp measurement report – 2 Jan 2011

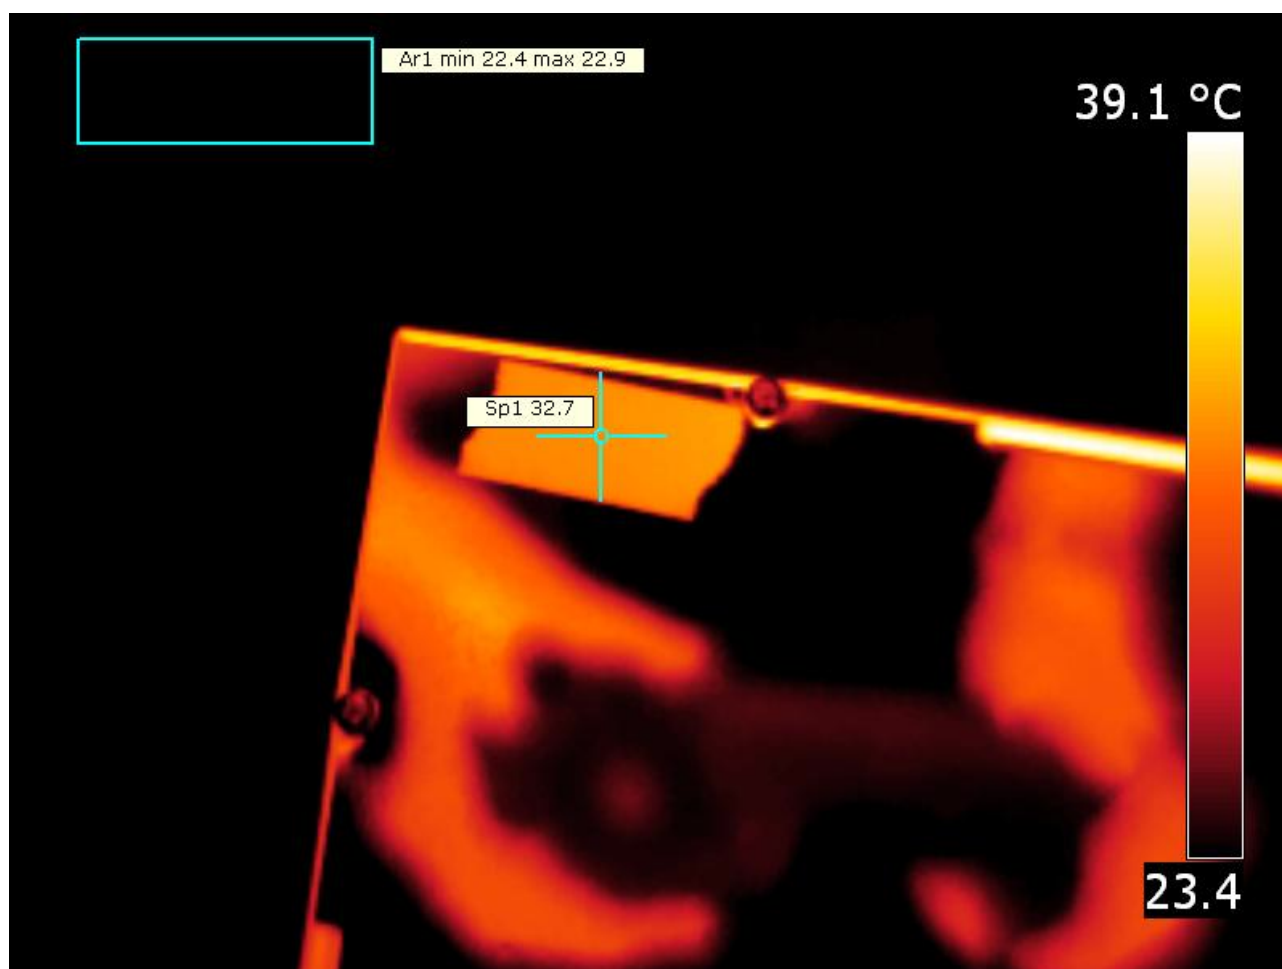

Back side is very reflective, therefore measurement with masking tape is done.

One can see the reflection of the hands and the IR camera. The back side gets hotter than ambient as it is expected that the leds are seated at the borders.

Lamp measurement report – 2 Jan 2011

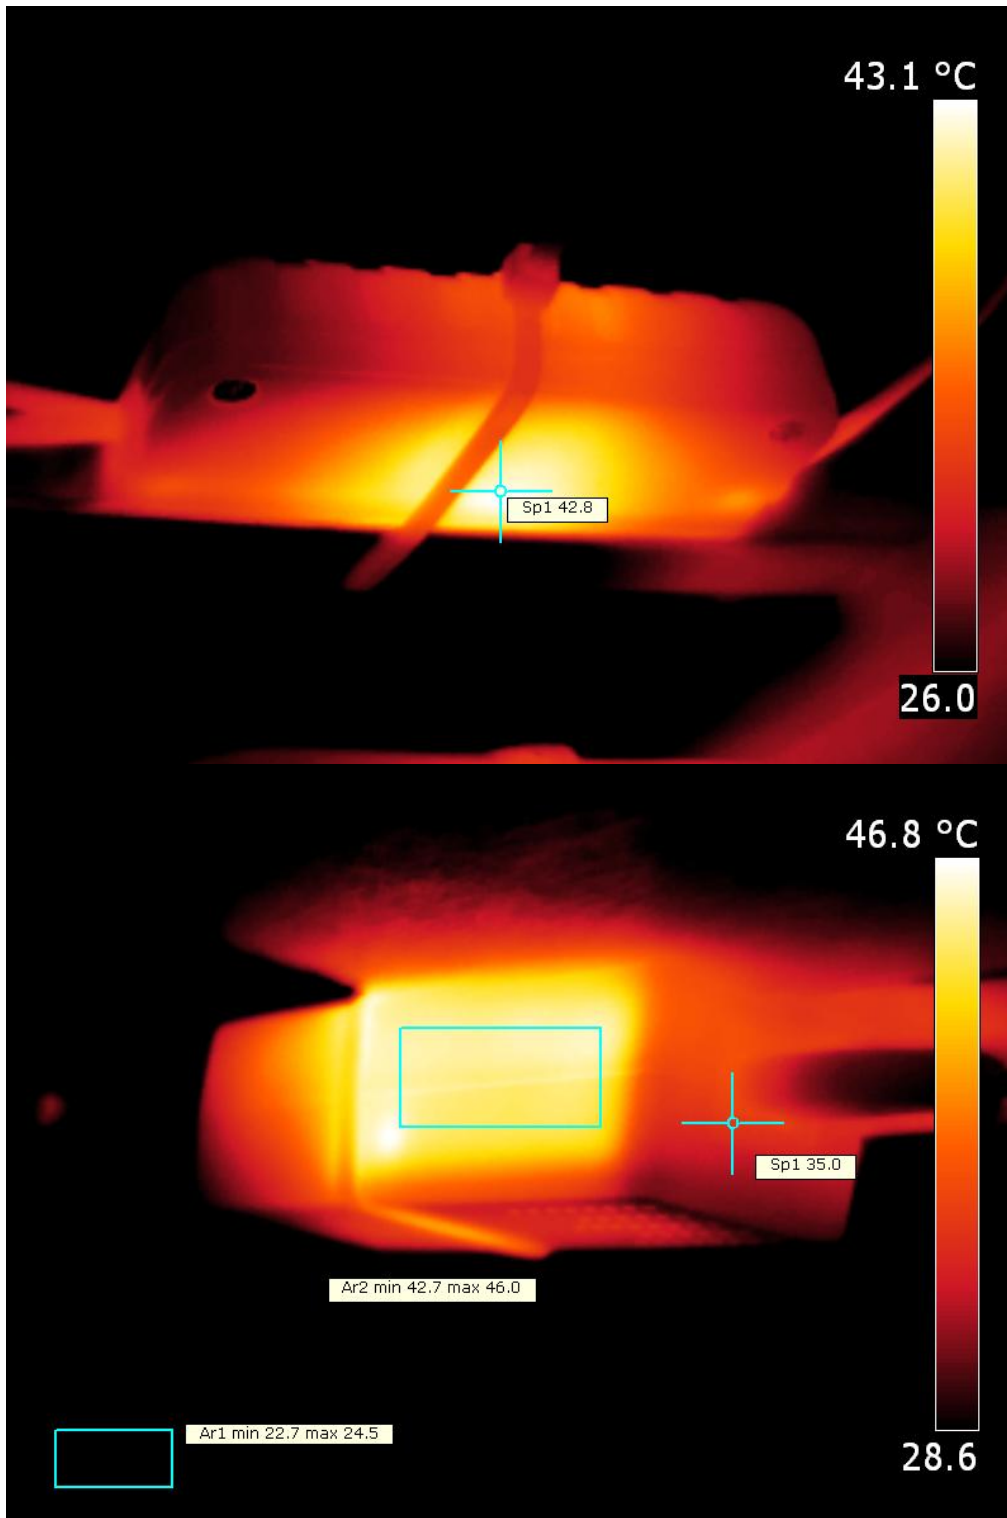


Temperature images from the two additional units needed for the led panel.

Lamp measurement report – 2 Jan 2011

status lamp	> 2 hours on
ambient temperature	22.5 - 24 deg C
reflected background temperature	22.5 - 24 deg C
camera	Flir T335
emissivity	0.70 - 0.95
measurement distance	0.3 - 1.0 m
IFOV _{geometric}	0.136 mm per 0.1 m distance
NETD (thermal sensitivity)	50 mK

Color temperature and Spectral power distribution

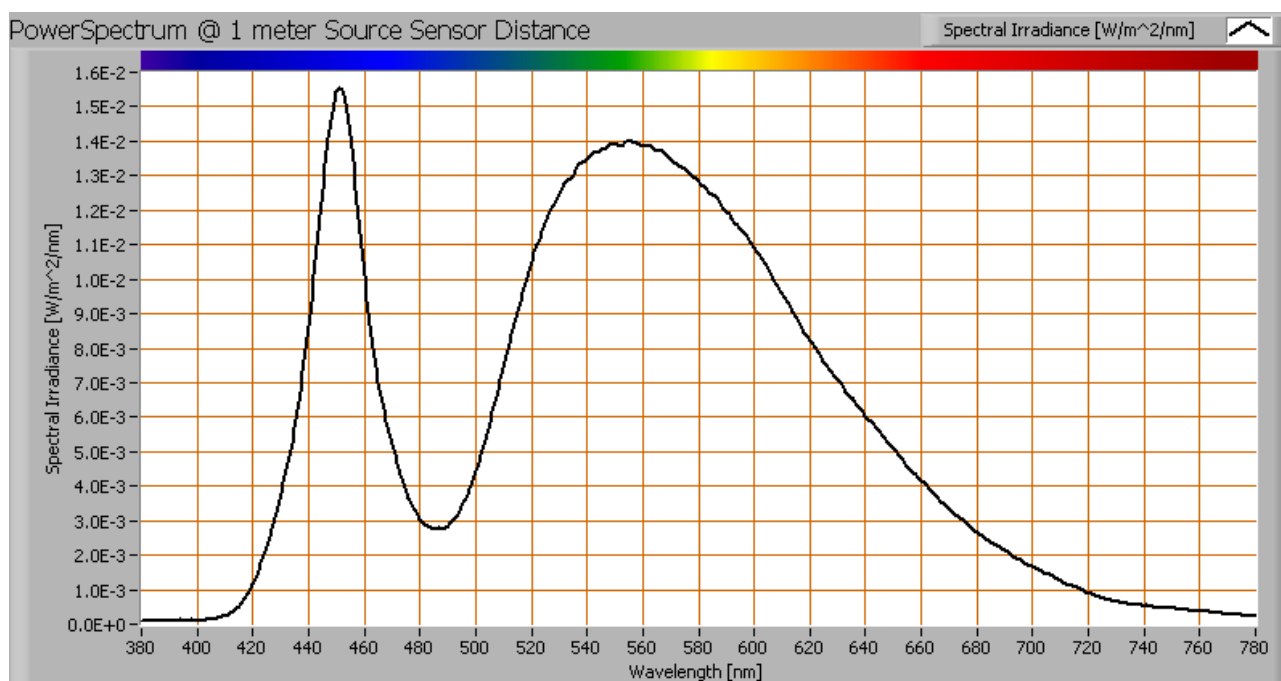


The spectral power distribution of this light bulb, energies on y-axis valid at 1 m distance.

The measured color temperature is 4984 K which is neutral white.

This color temperature is measured straight underneath the light bulb. Below a graph showing the color temperature for different inclination angles.

Lamp measurement report – 2 Jan 2011

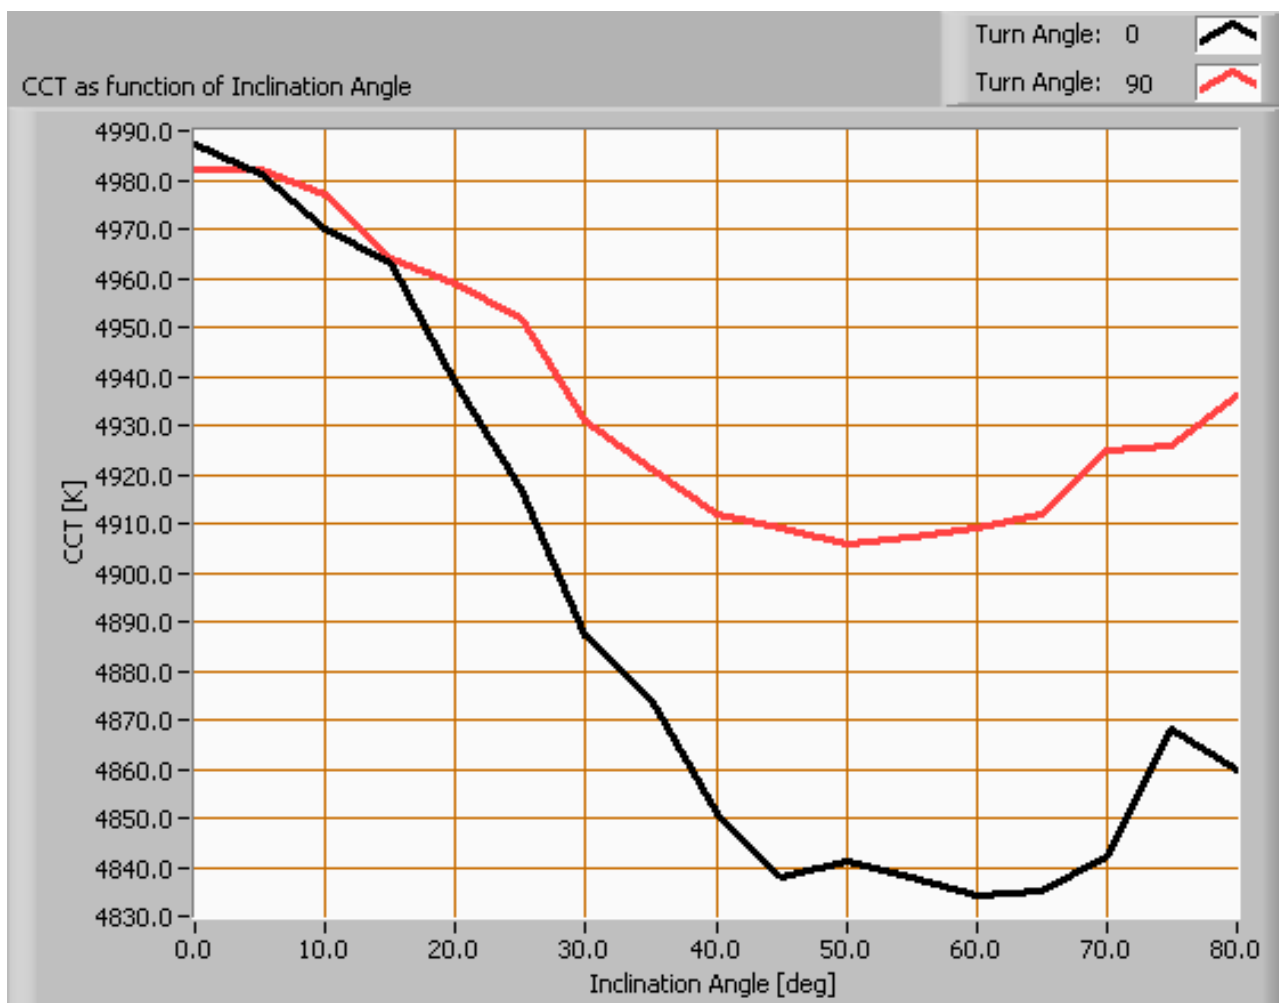

Color temperature as a function of inclination angle.

The color temperature is given for inclination angles up to 80 deg. Beyond that value the illuminance is so low (< 5 lux) that it has not been used for color determination of the light.


For the C0-C180 plane: the beam angle of 116 deg is equivalent to 58.2 deg inclination angle, which is the area where most of the light falls within. The maximum variation of color temperature in this inclination area is about 2 %.

For the C90-C270 plane: the beam angle of 120 deg is equivalent to 59.9 deg inclination angle, which is the area where most of the light falls within. The maximum variation of color temperature in this inclination area is about 3 %.

Lamp measurement report – 2 Jan 2011

PAR value and PAR spectrum

To make a statement how well the light of this light bulb is for growing plants, the PAR-area needs to be determined. See the explanation about PAR on the OLiNo website how this all is determined and the explanation of the graph.

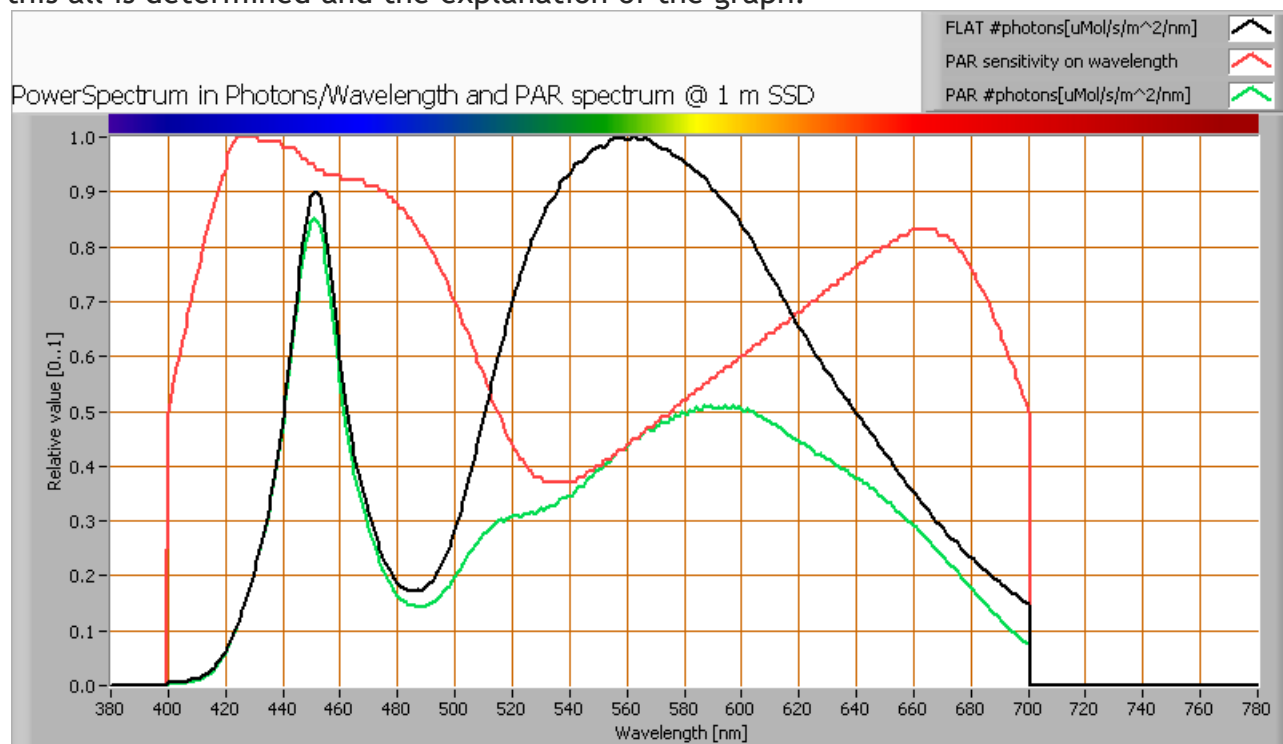

The photon spectrum, then the sensitivity curve and as result the final PAR spectrum of the light of this light bulb


parameter	value	unit
PAR-number	6.5	uMol/s/m ²
PAR-photon current	19.7	uMol/s
PAR-photon efficacy	0.5	uMol/s/W

The PAR efficiency is 62 % (valid for the PAR wave length range of 400 - 700 nm). This is the maximum percentage of the total of photons in the light that is effectively used by the average plant (since the plant might not take 100 % of the photons at the frequency where its relative sensitivity is 100 %).

Lamp measurement report – 2 Jan 2011

S/P ratio

The S/P ratio and measurement is explained on the OliNo website. Here the results are given.

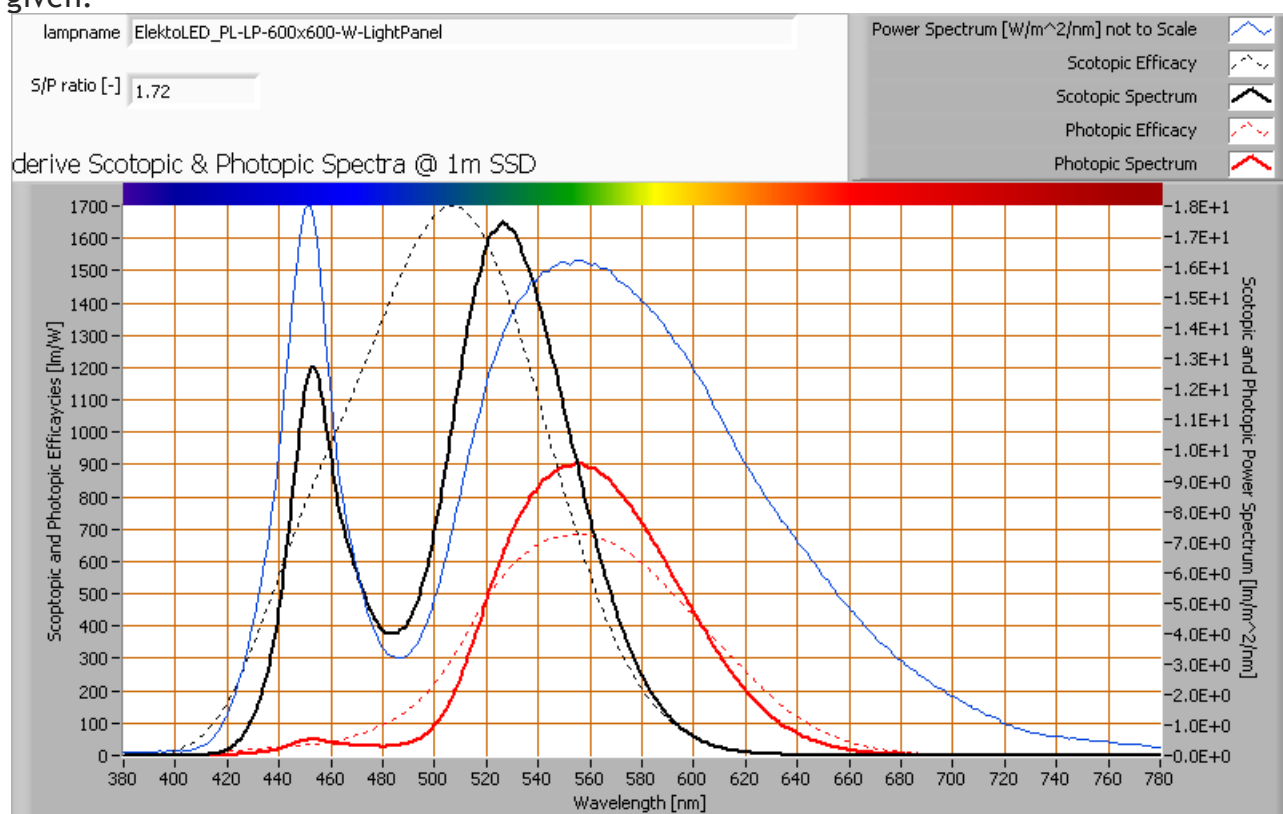


The power spectrum, sensitivity curves and resulting scotopic and photopic spectra (spectra energy content defined at 1 m distance).

The S/P ratio of the light coming from this lamp is 1.7.

More info on S/P ratio can be found on the OliNo website.

Lamp measurement report – 2 Jan 2011

Chromaticity diagram

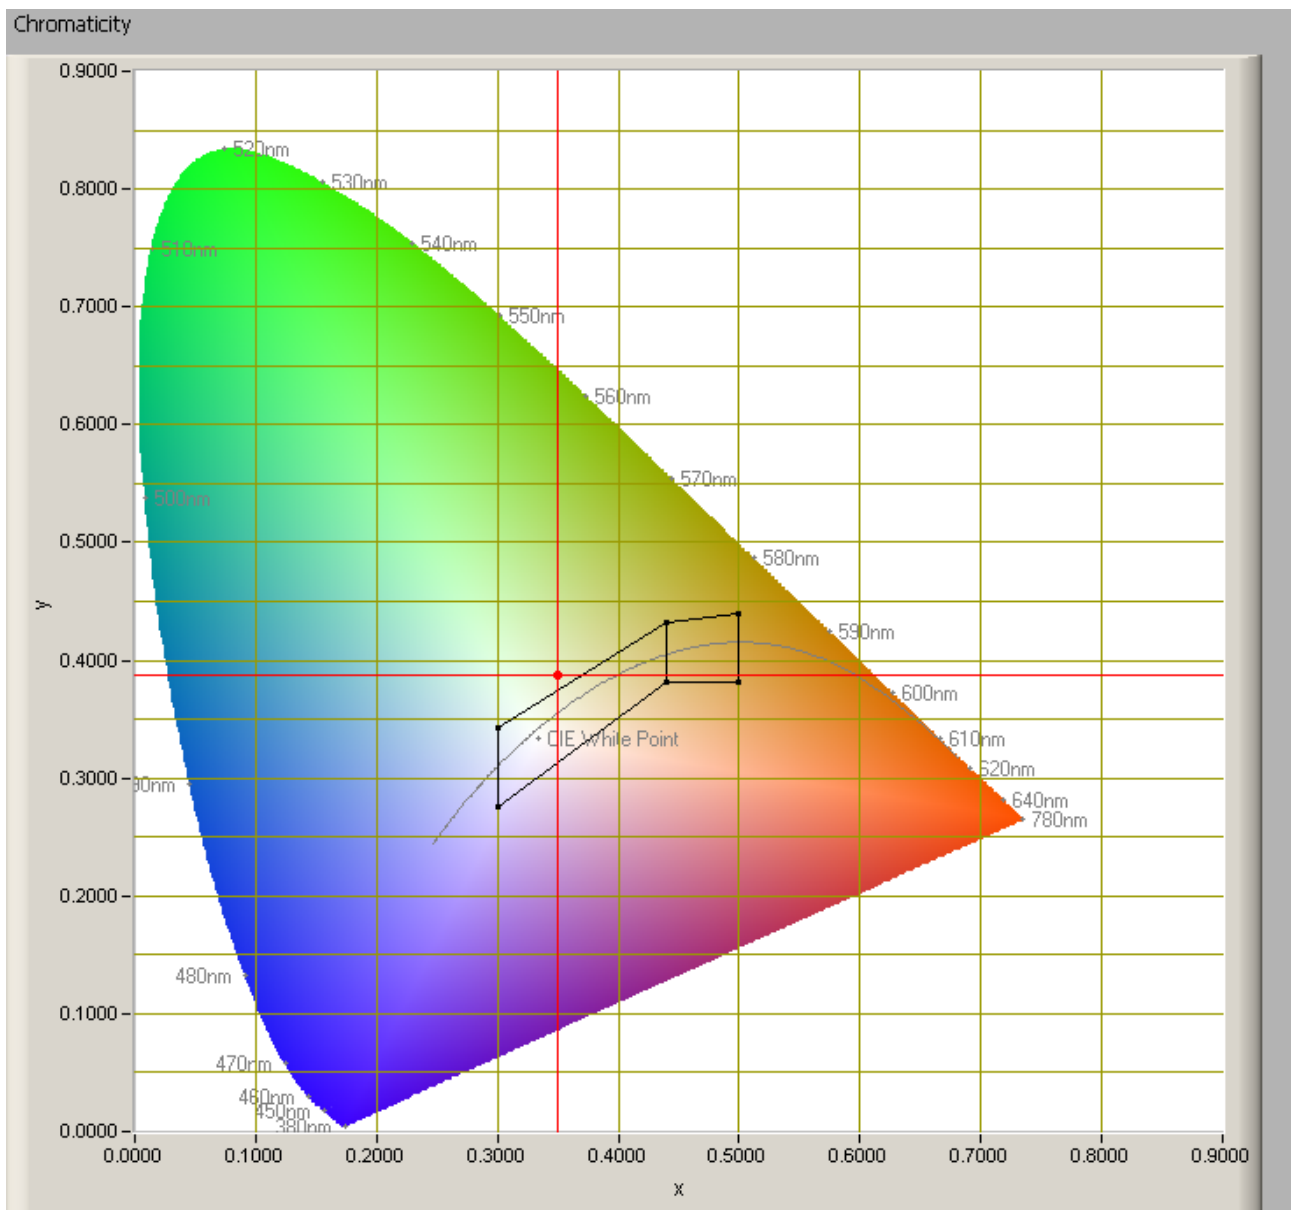

The chromaticity space and the position of the lamp's color coordinates in it.

The point of the light in this diagram is outside the area indicated with class A. This area indicates an area for signal lamps, see also the article on signal lamps and color areas on the OLiNo website.

The color coordinates are $x=0.3504$ and $y=0.3875$.

Lamp measurement report – 2 Jan 2011

Color Rendering Index (CRI) or also Ra

Herewith the image showing the CRI as well as how well different colors are represented (rendered). The higher the number, the better the resemblance with the color when a black body radiator would have been used (the sun, or an incandescent lamp). Practical information and also some critics about the CRI can be found on the OLiNo website.

Each color has an index Rx, and the first 8 indexes (R1 .. R8) are averaged to compute the Ra which is equivalent to the CRI.

☐ manual

Reference Illuminant

Planckian radiator















 CCT

4984

 K

Chromaticity Difference DC=

1.5E-2

R1=	63		R8=	54.1	
R2=	73.3		R9=	-43.2	
R3=	82		R10=	37.2	
R4=	67.6		R11=	61	
R5=	63.3		R12=	29.7	
R6=	63.2		R13=	64.4	
R7=	84.4		R14=	89.9	

Ra
 (mean value of R1 - R8)

68.9

CRI of the light of this lightbulb.

This value of 69 indicates how well the light of this lamp can render well a set of reference colors, this in comparison with the light of a reference source (for color temperatures < 5000K a black radiator is used as reference and for color temperatures > 5000K the sun or the light outside during the day).


The value of 69 is smaller than the value of 80 that is considered as a minimum for working areas in general.

Note: the chromaticity difference is 0.0150 and indicates the distance to the Planckian Locus. There is no norm yet that states what the max deviation from white light is allowed to be. A reference with signal lights as a reference is given in the chromaticity diagram.

Lamp measurement report – 2 Jan 2011

Voltage dependency

The dependency of a number of lamp parameters on the lamp voltage is determined. For this, the lamp voltage has been varied and its effect on the following light bulb parameters measured: illuminance E_v [lx], the lamp power P [W] and the luminous efficacy [lm/W] (this latter is estimated here by dividing the found E_v value by P).

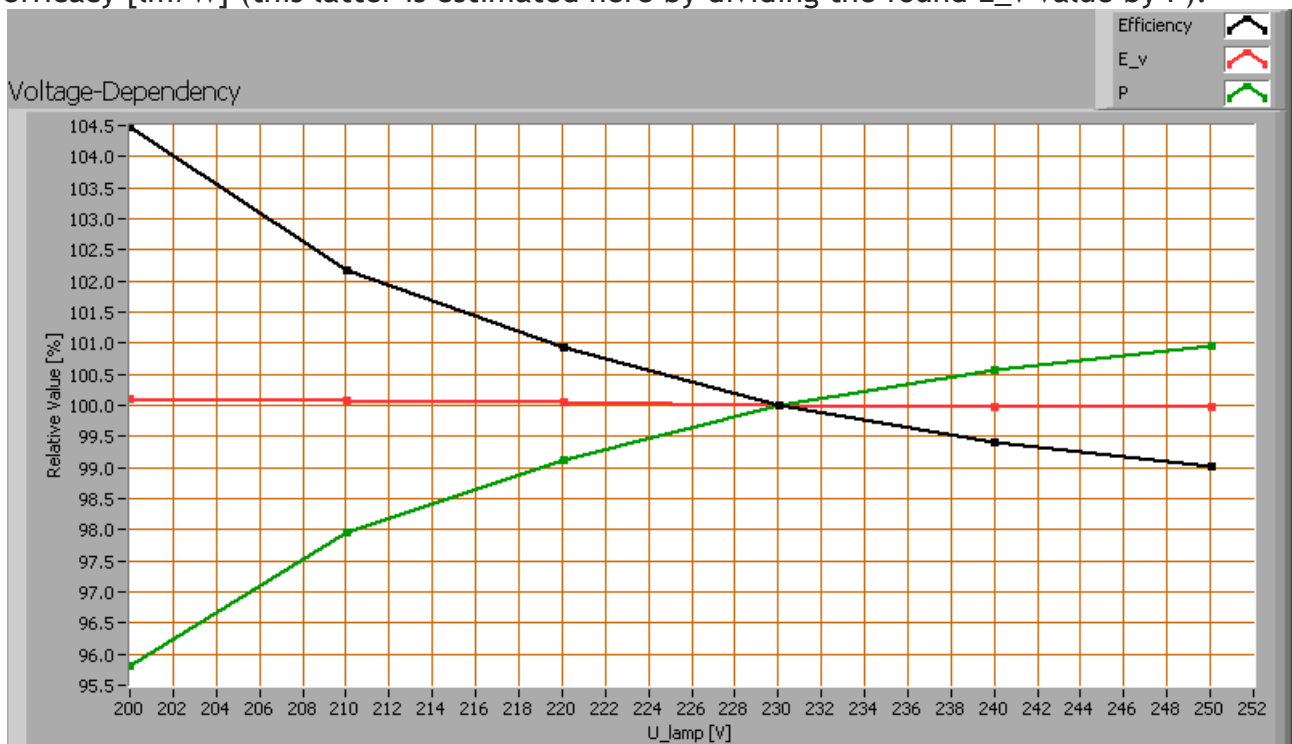

Lamp voltage dependencies of certain light bulb parameters


There is no (significant) dependency of the illuminance when the power voltage varies between 200 - 250 V AC. There is no (significant) dependency of the consumed power when the power voltage varies between 200 - 250 V AC.

When the voltage varies abruptly with + or - 5 V AC then this results in a variation of the illuminance of maximally 0.0 %. This difference in illuminance is not visible (when it occurs abruptly).

Warm up effects

After switch on of a cold lamp, the effect of heating up of the lamp is measured on illuminance E_v [lx], the lamp power P [W] and the luminous efficacy [lm/W].

Lamp measurement report – 2 Jan 2011

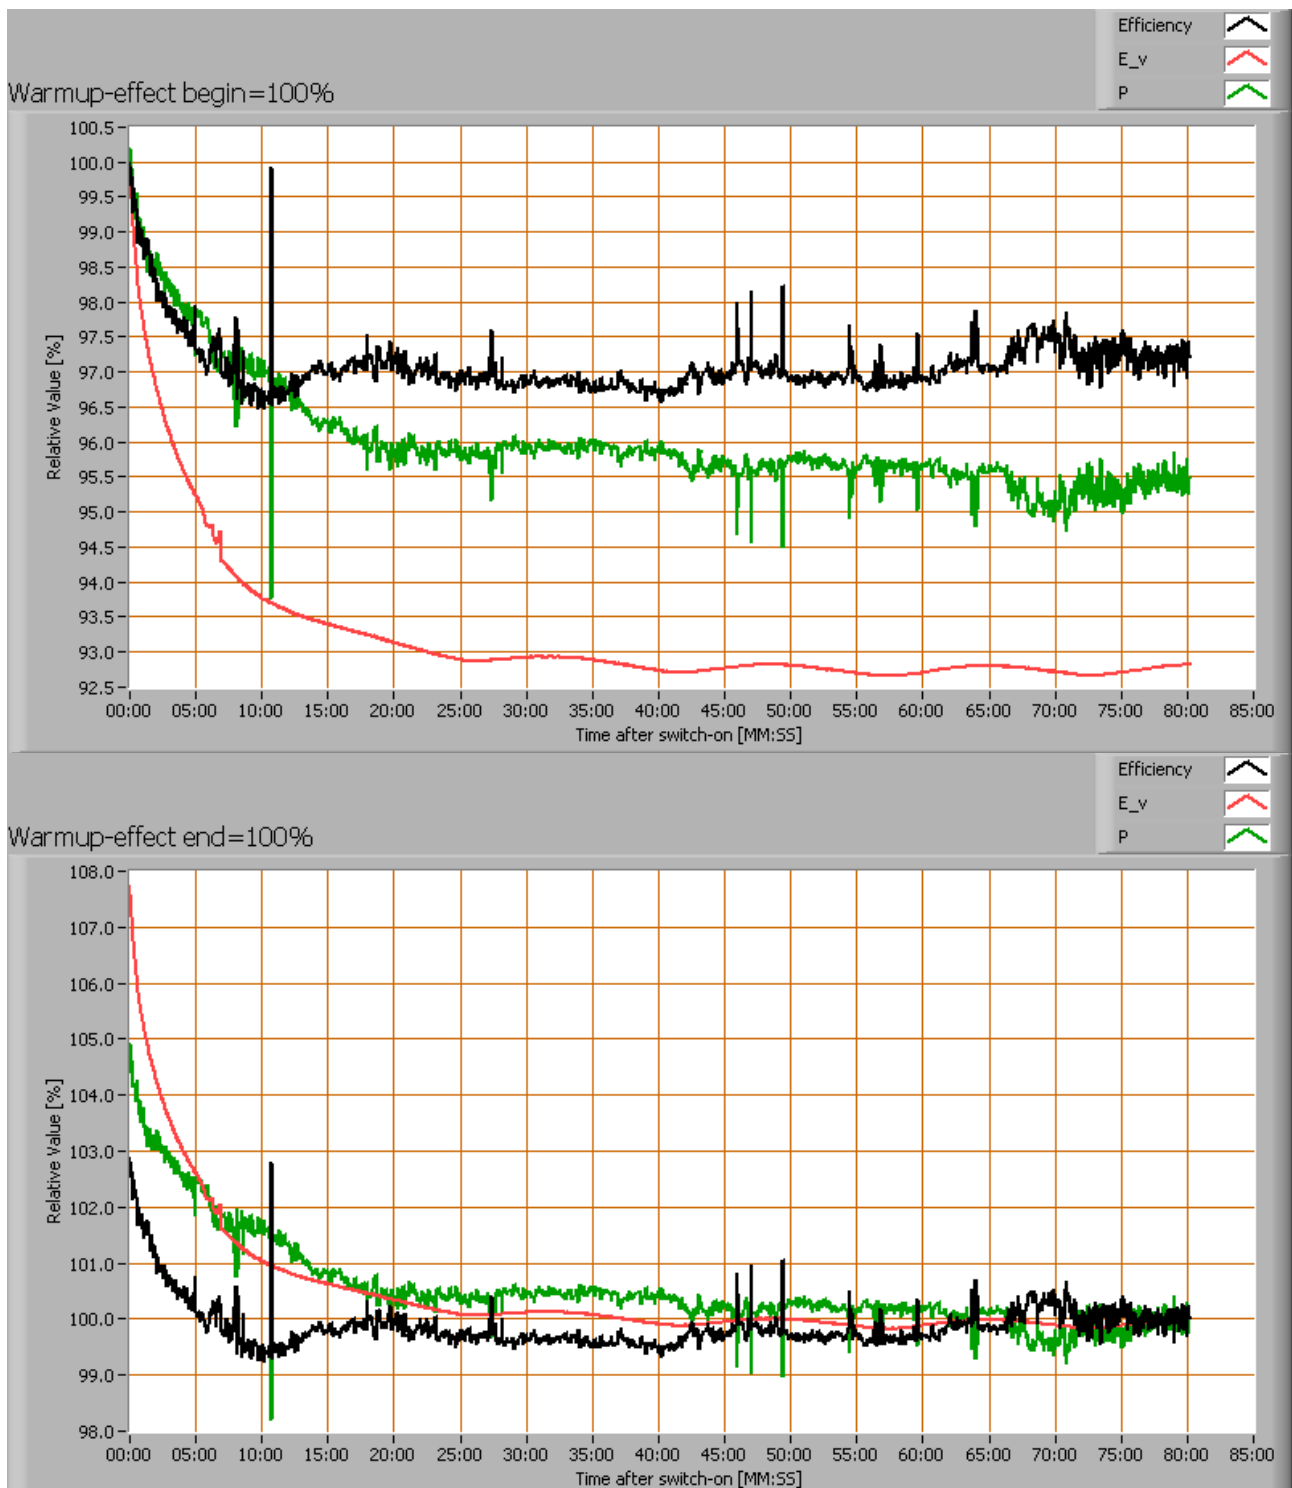


Effect of warming up on different light bulb parameters. In the first graph the 100 % level is put at begin, and in the last graph the 100 % level is put at the end.

Lamp measurement report – 2 Jan 2011

The warmup time is about 20 minutes during which the illuminance decreases with 7 % and the consumed power decreases with 5 %.

Measure of flickering

An analysis is done on the measure of flickering of the light output by this light bulb. See the article on flickering on OliNo site for more information.

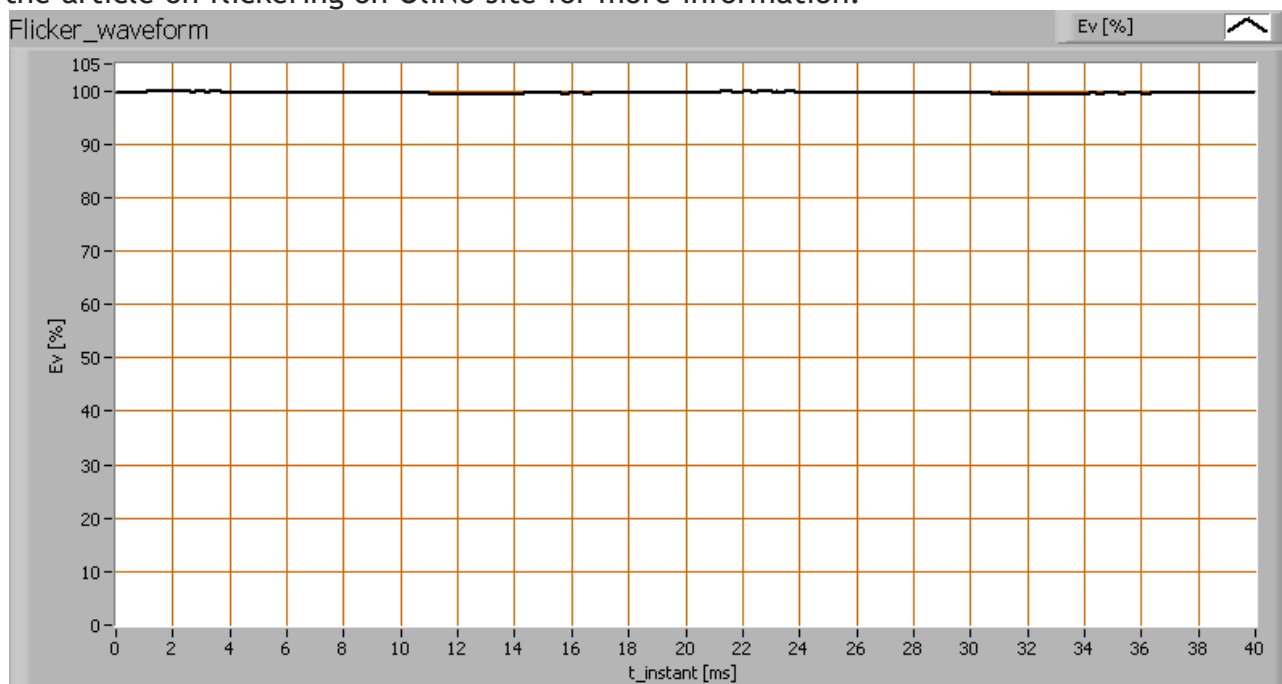


The measure of fast illuminance variation of the light of the light bulb

parameter	value	unit
Flicker frequency	50.4	Hz
Illuminance modulation index	0	%

The illuminance modulation index is computed as: $(\max_Ev - \min_Ev) / (\max_Ev + \min_Ev)$.

Lamp measurement report – 2 Jan 2011

Extra

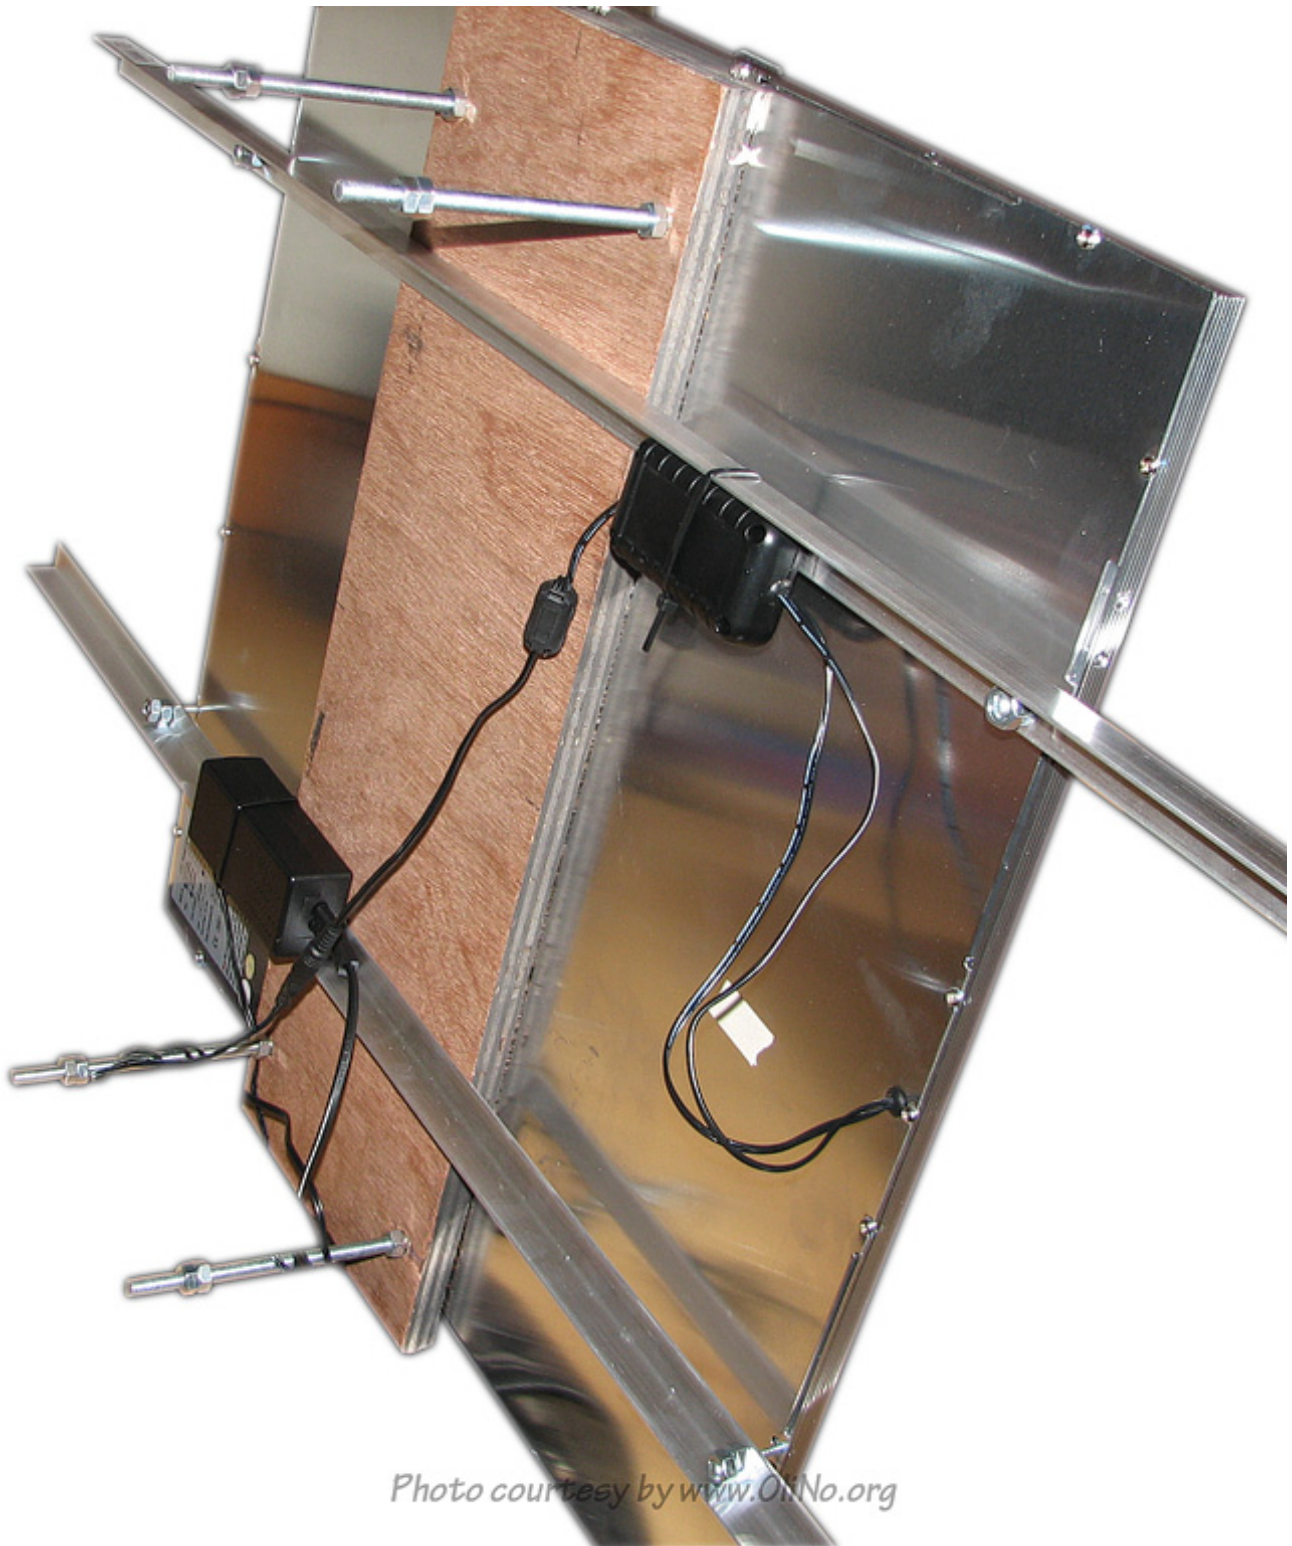



Lamp measurement report – 2 Jan 2011

Back side of the panel, indicated also the way it was mounted. And visible the two additional units to connect the panel to the 230 V AC.

Disclaimer

The information in this OliNo report is created with the utmost care. Despite this, the information could contain inaccuracies. OliNo cannot be held liable in this instance nor can the data in this report be legally binding.

We strive to adhere to all of the conditions of any copyright holder in the publication of any illustration/article or item. In the event that we unintentionally violate said copyright holder's conditions in our articles, we kindly ask to be contacted here at OliNo so that we can resolve any disputes, issues or misunderstandings.

License

It is permitted ONLY to use or publish this report in its entirety and in unaltered form via internet or other digital or written media in any form. To guarantee the reliability and accuracy of the report, it is strictly probited to change or alter parts of the report and/or republish it in a modified content.