

**Lamp measurement report – 19 Oct 2011**

**GoGreen 20W dimmable energy saving lamp**  
by  
**Technea**



*Photo courtesy by [www.OliNo.org](http://www.OliNo.org)*

## Lamp measurement report – 19 Oct 2011

### Summary measurement data

parameter	meas. result	remark
Color temperature	2739 K	warm white
Luminous intensity $I_v$	118.7 Cd	Measured straight underneath the lamp.
Illuminance modulation index	7 %	Measured with a light sensor looking at the lamp (angle not defined). Is a measure for the amount of flickering.
Beam angle	297 deg	297 deg is the beam angle for all C-planes since the lamp is symmetrical along its 1st axis.
Power P	17.9 W	Follow the link for more information on electrical properties.
Power Factor	0.76	An electrical load with this power factor means that for every 1 kWh net energy consumed, there has been 0.85 kVAhr for reactive energy.
THD	77 %	Total Harmonic Distortion.
Luminous flux	1420 lm	
Luminous efficacy	80 lm/W	
EU-label classification	A	The energy class, from A (more efficient) to G (least efficient).
CRI_Ra	81	Color Rendering Index.
Coordinates chromaticity diagram	x=0.4645 en y=0.4234	
Fitting	E27	This lamp is connected directly to the grid voltage.
PAR-value	0.8 $\mu\text{Mol/s/m}^2$	The number of photons seen by an average plant when it is lit by the light of this light bulb. Value valid at 1 m distance from light bulb.
PAR-photon efficacy	0.5 $\mu\text{Mol/s/W}_e$	The total emitted number of photons by this light, divided by its consumption in W. It indicates a kind of efficacy in generating photons.
S/P ratio	1.1	This factor indicates the amount of times more efficient the light of this light bulb is perceived under scotopic circumstances (low environmental light level).




## Lamp measurement report – 19 Oct 2011

D x H external dimensions	58 mm x 135 mm	External dimensions of the lamp.
D x H luminous area	58 mm x 65 mm	Dimensions of the luminous area (used in Eulumdat file). It is the surface of the area occupied by the compact tube that emits the light.
General remarks		<p>The ambient temperature during the whole set of illuminance measurements was 23.6 - 24.1 deg C.</p> <p>The temperature of the housing gets maximally about 48 degrees hotter than ambient temperature.</p> <p>Warm up effect: During the warmup time the illuminance varies during 6 minutes and increases with 620 %.</p> <p>During the warmup time the power varies during 6 minutes and increases with 50 %.</p> <p>Voltage dependency: There is a constant dependency of the illuminance when the power voltage varies between 200 - 250 V AC. There is a constant dependency of the consumed power when the power voltage varies between 200 - 250 V AC.</p> <p>Also the dim-ability of this lamp has been tested, and the result is that the lamp is dim-able, see also the separate chapter in this test report.</p>
Dimmable	yes	Info from manufacturer.
Biologic effect factor	0.253	According to pre-norm DIN V 5031-100:2009-06.
Blue Light Hazard risk group	0	0=exempt, 1=low, 2 = moderate, 3=high risk.

## Lamp measurement report – 19 Oct 2011

### Overview table

m.	Ø 50%		CO-180: 297° C90-270: 297° 	E (lux)	Luminaire Efficacy
	CO-180	C90-270			80 (lumen per Watt)
0.25				1899	Half-peak diam CO-180
0.5				475	x diameter(m)
1				119	Half-peak diam C90-270
1.5				53	x diameter(m)
3				13	Illuminance
4				7	119 / distance <sup>2</sup> (lux)
5				5	Total Output
					1420 (lumen)


The overview table is explained on the OLiNo website.

Please note that this overview table makes use of calculations, use this data with care as explained on the OLiNo site. E (lux) values are not accurate, when within 5 x 65 mm (maximal luminous size, eventually diagonally measured)= 325 mm. Within this distance from the lamp, the measured lux values will be less than the computed values in this overview as the measurements are then within the near field of the lamp.


### EU Energy label classification

With the measurement results of the luminous flux and the consumed power the classification on energy efficacy of this lamp is calculated. This information is requested in the EU for certain household lamps, see also the OLiNo site that explains for which lamps it is requested, how the label looks like and what information it needs to contain. Herewith the labels for this lamp in color and black and white.

## Lamp measurement report – 19 Oct 2011

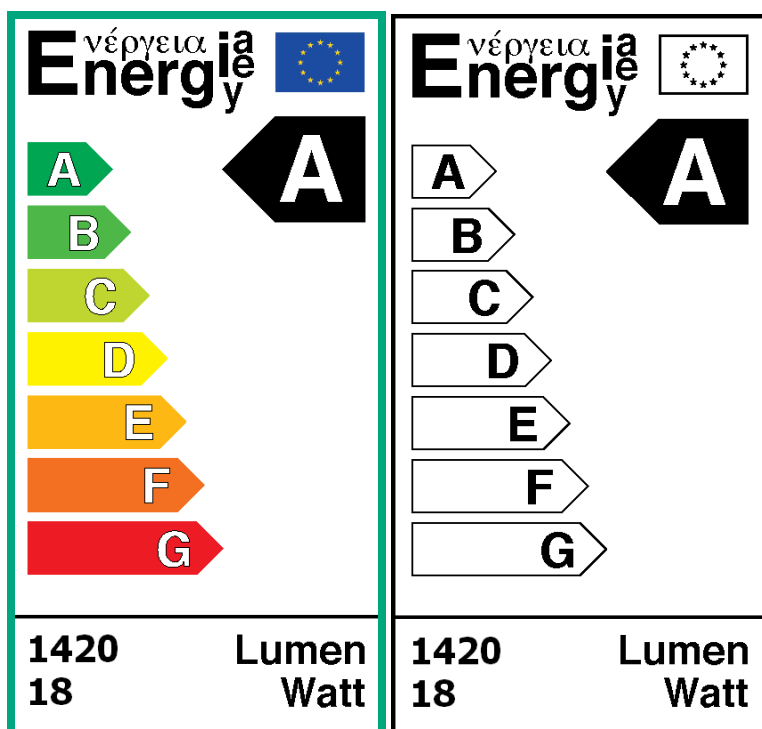

EU energy label of this lamp

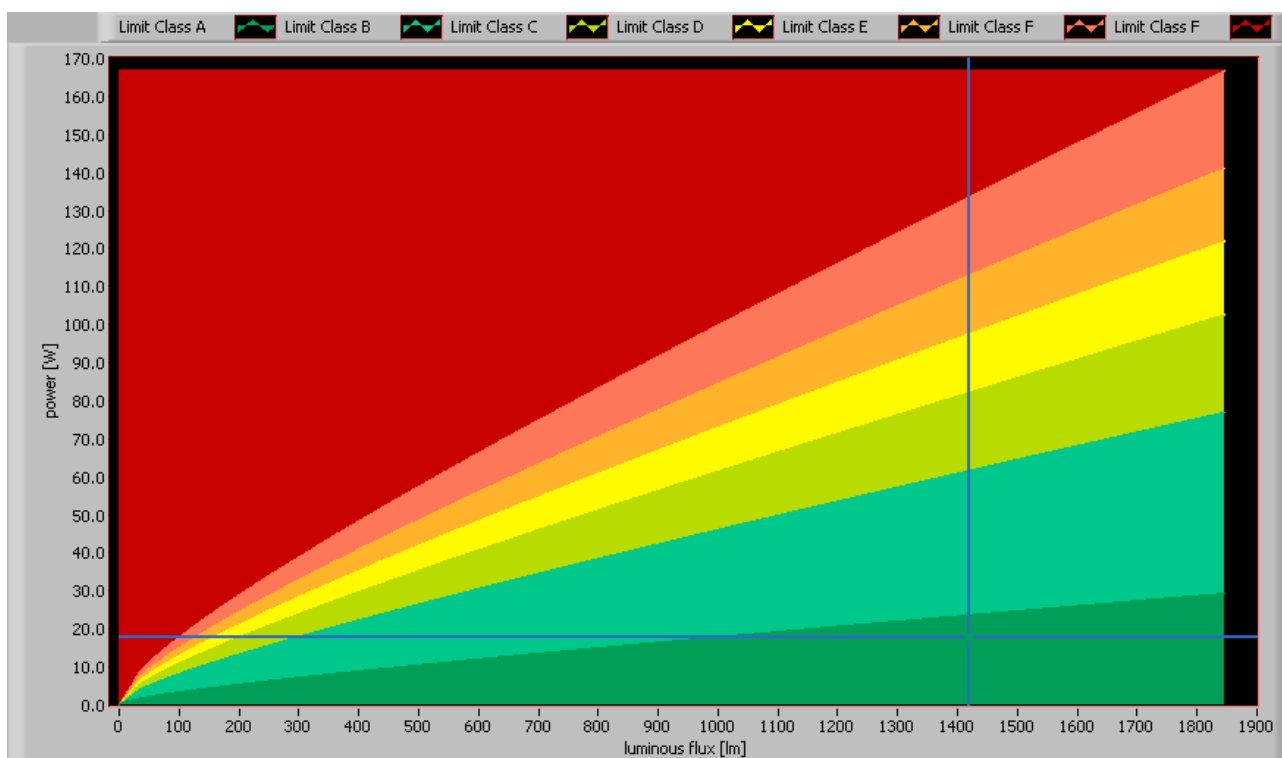


The lamp's performance in the lumen-Watt field, with the energy efficacy fields indicated.

## Lamp measurement report – 19 Oct 2011

### Eulumdat light diagram

This light diagram below comes from the program Qlumedit, that extracts these diagrams from an Eulumdat file. This light diagram is explained on the OLiNo site.

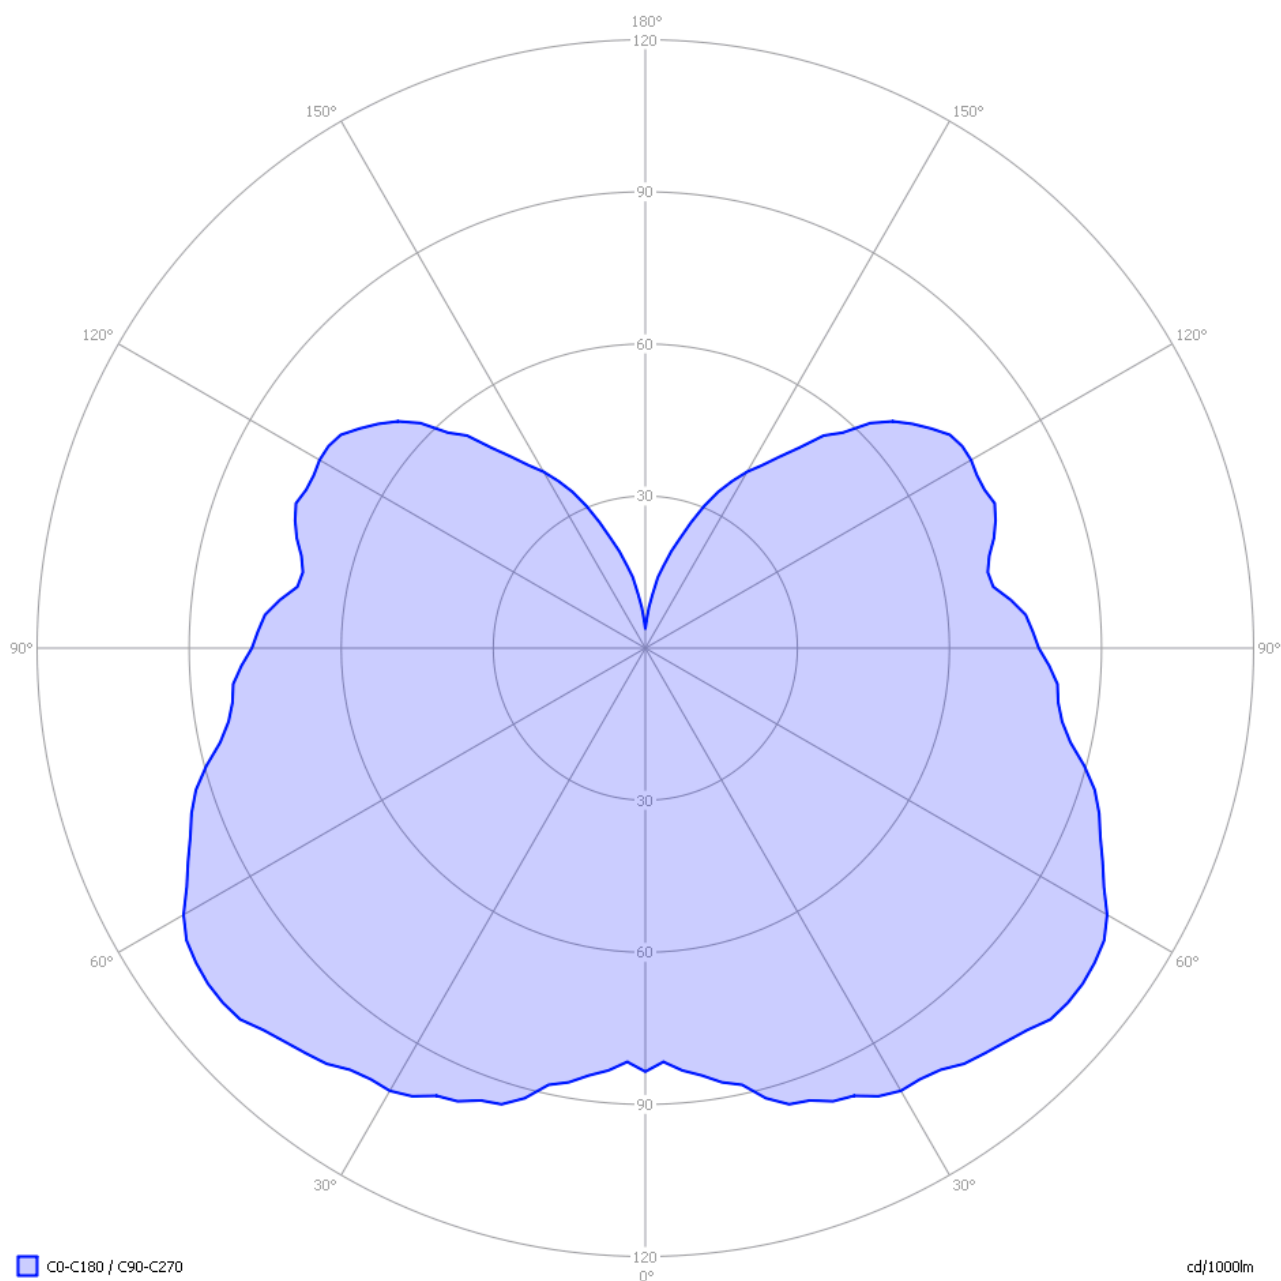

*The light diagram giving the radiation pattern.*


The light diagram indicates the beam in the C0-C180 plane and in the plane

## Lamp measurement report – 19 Oct 2011

perpendicular to that, the C90-C270 plane. These beams are equal as the lamp has symmetry over its first axis (the vertical axis).

### Illuminance $E_v$ at 1 m distance, or luminous intensity $I_v$

Herewith the plot of the *averaged* luminous intensity  $I_v$  as a function of the inclination angle with the light bulb.

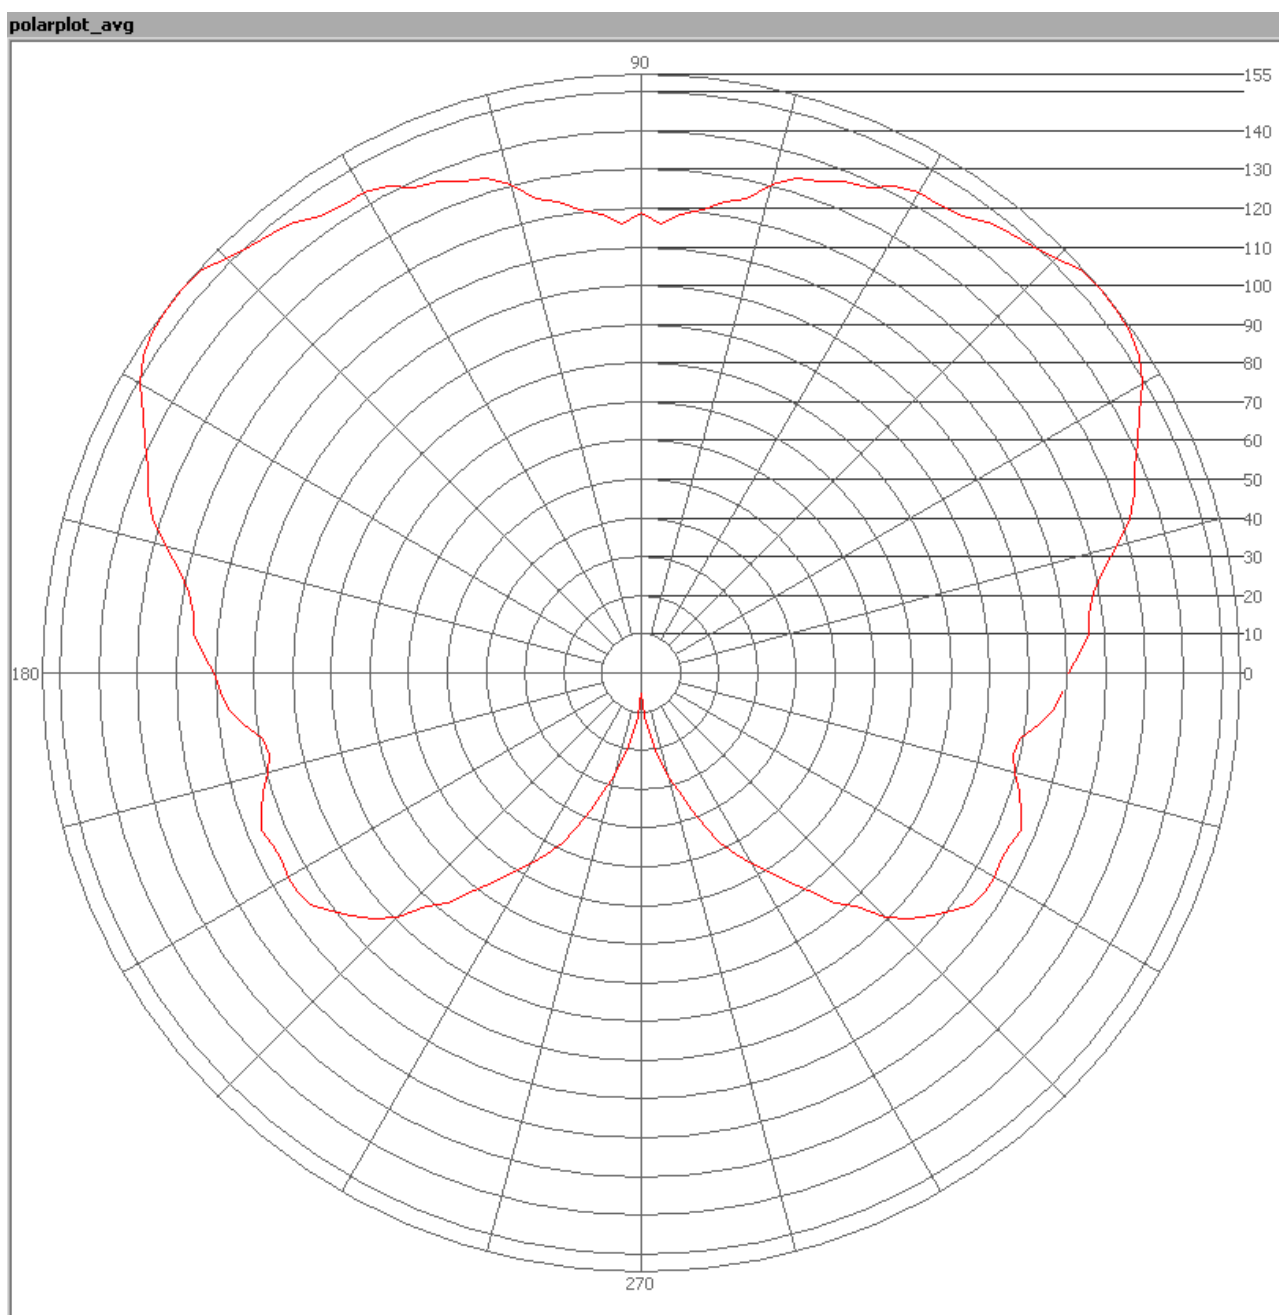




## Lamp measurement report – 19 Oct 2011

*The radiation pattern of the light bulb.*

This radiation pattern is the average of the light output of the light diagram given earlier. Also, in this graph the luminous intensity is given in Cd.

These averaged values are used (later) to compute the lumen output.

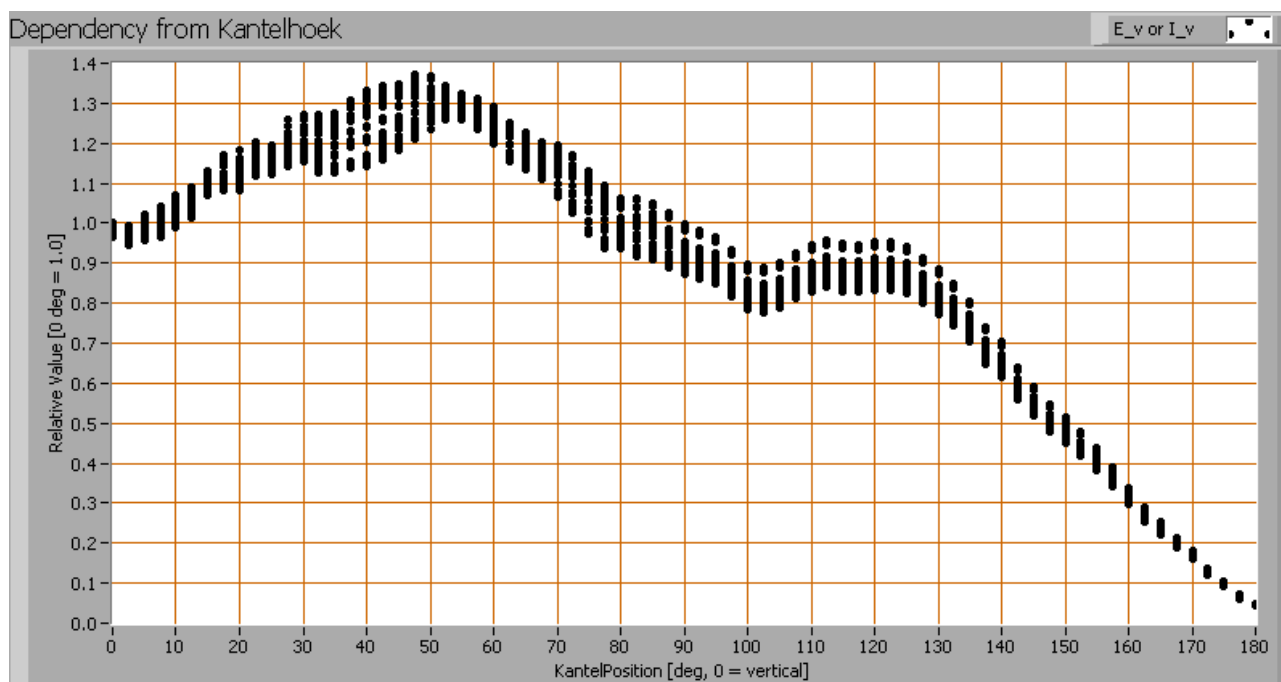

*Intensity data of every measured turn angle at each inclination angle.*

This plot shows per inclination angle the intensity measurement results for each turn angle at that inclination angle. There normally are differences in illuminance values for different turn angles. However for further calculations the averaged values will be used.

When using the average values per inclination angle, the beam angle can be computed, being 297 deg for the C0-C180 plane and 297 deg for the C90-C270 plane.

## Luminous flux

With the averaged illuminance data at 1 m distance, taken from the graph showing the averaged radiation pattern, it is possible to compute the luminous flux.

The result of this computation for this light spot is a luminous flux of 1420 lm.



## Lamp measurement report – 19 Oct 2011

### Luminous efficacy


The luminous flux being 1420 lm, and the consumed power of the lamp being 17.9 Watt, results in a luminous efficacy of 80 lm/Watt.

### Electrical properties

The power factor is 0.76. An electrical load with this power factor means that for every 1 kWh net energy consumed, there has been 0.85 kVAhr for reactive energy.

Lamp voltage	230.0 V
Lamp current	0.102 A
Power P	17.9 W
Apparent power S	23.5 VA
Power factor	0.76


Of this lamp the voltage across and the resulting current through it are measured and graphed. See the UI acquisition on the OLiNo site how this is obtained.

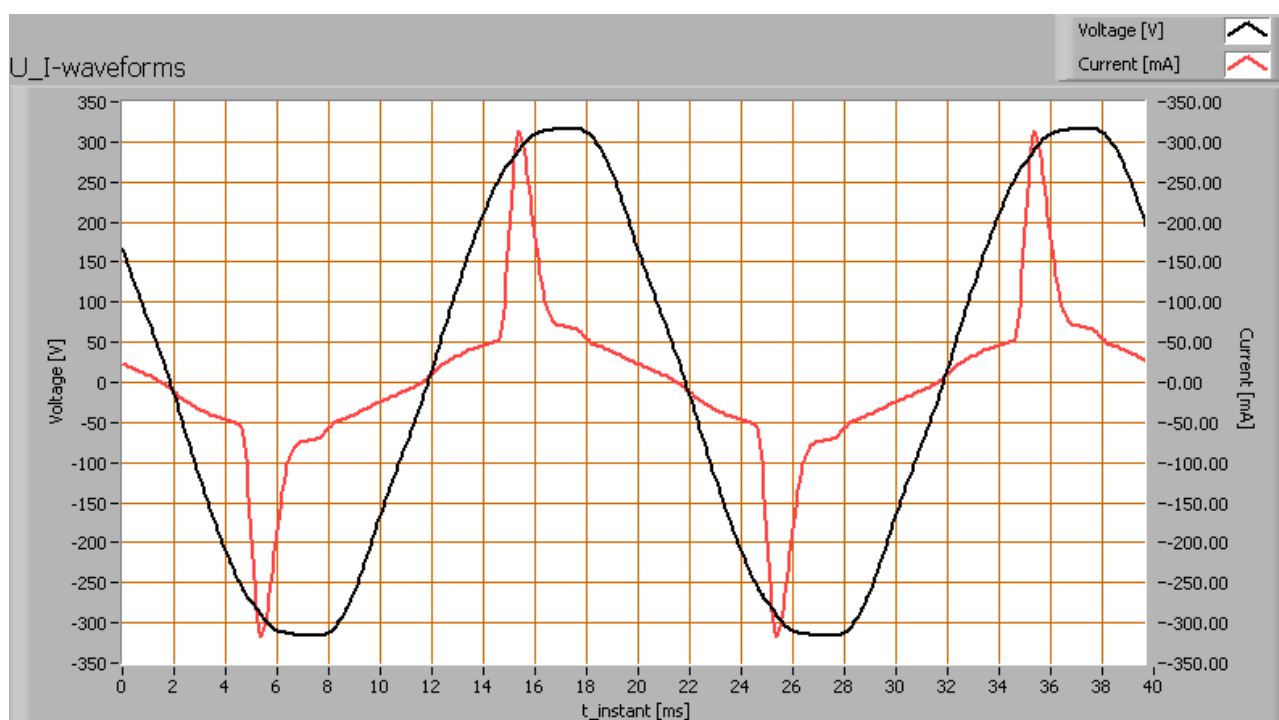

#### *Voltage across and current through the lightbulb*

This current waveform has been checked on requirements posed by the norm IEC 61000-3-2:2006 (including up to A2:2009). See also the IEC 61000-3-2:2006 explanation on the OLiNo website.

## Lamp measurement report – 19 Oct 2011

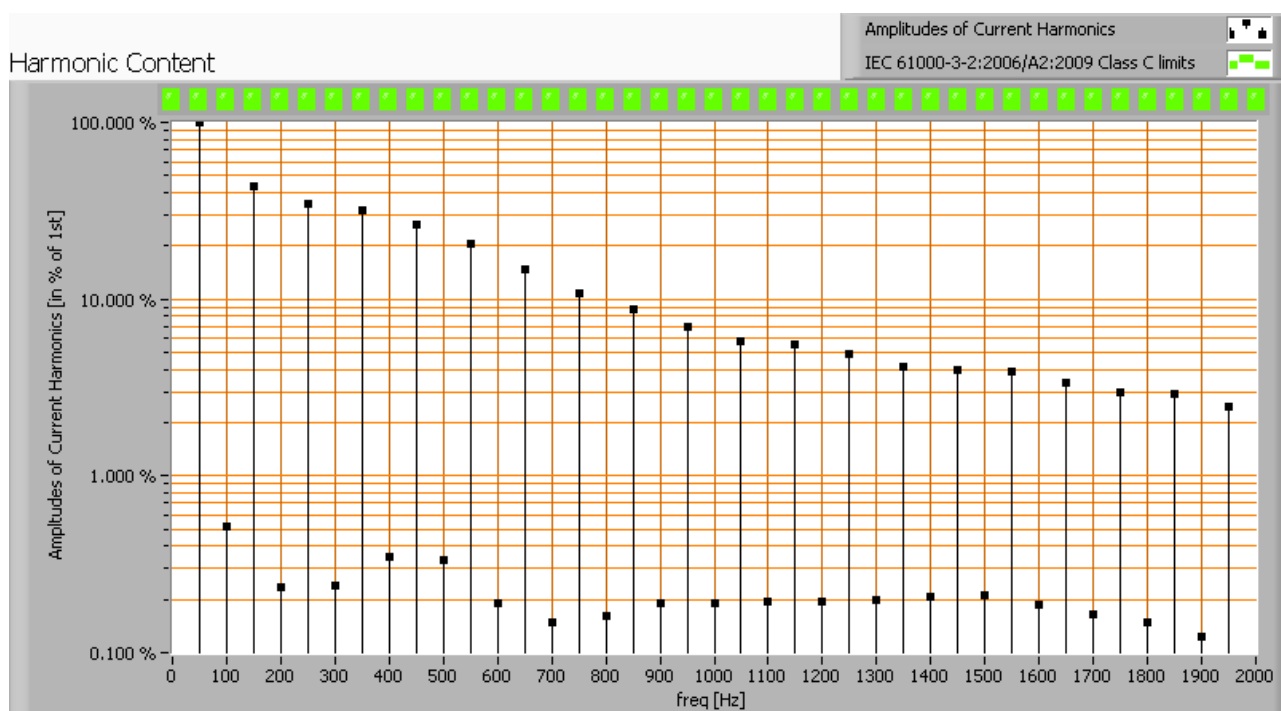

*Harmonics in the current waveform and checked against IEC61000-3-2:2006 and A2:2009*

When the consumed power is  $\leq 25$  W there are no limits for the harmonics.

The Total Harmonic Distortion of the current is computed and its value is 77 %.

## Lamp measurement report – 19 Oct 2011

### Temperature measurements lamp




*Temperature image(s).*

status lamp	> 2 hours on
ambient temperature	22.5 deg C
reflected background temperature	22.5 deg C
camera	Flir T335
emissivity	0.95
measurement distance	0.5 m
IFOV <sub>geometric</sub>	0.136 mm per 0.1 m distance
NETD (thermal sensitivity)	50 mK

## Lamp measurement report – 19 Oct 2011

### Color temperature and Spectral power distribution

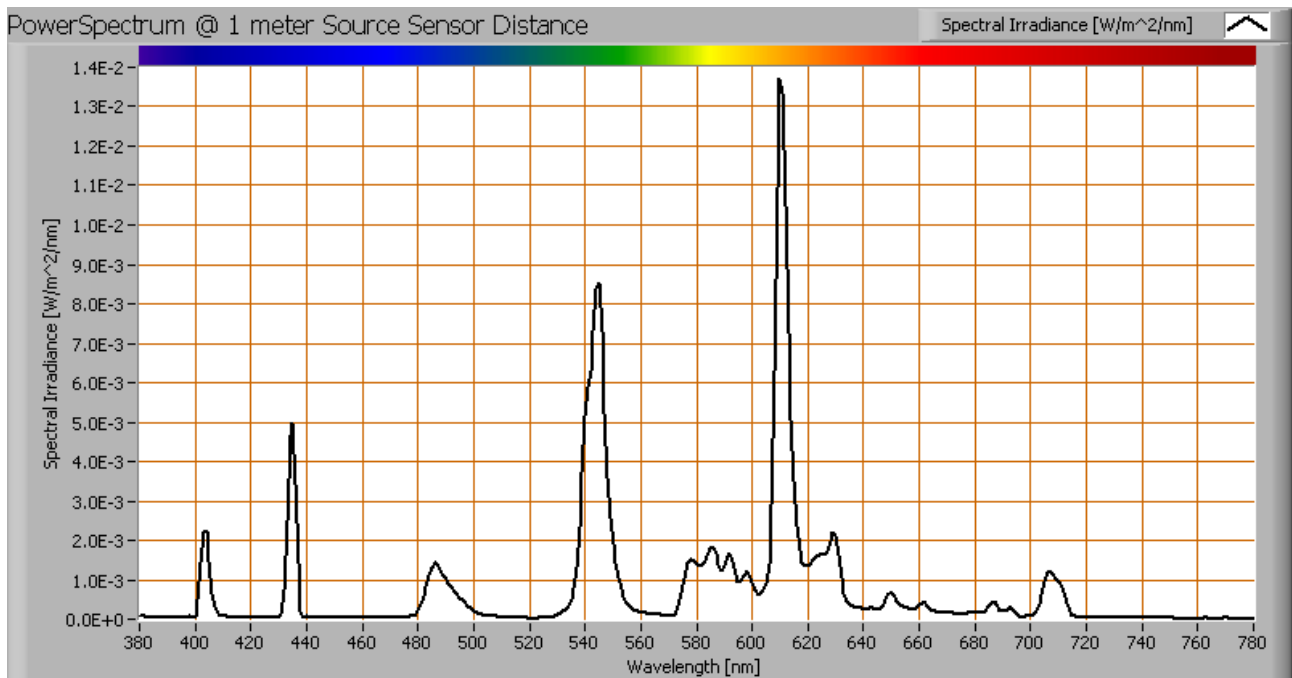


*The spectral power distribution of this light bulb, energies on y-axis valid at 1 m distance.*

The measured color temperature is 2739 K which is warm white.

This color temperature is measured straight underneath the light bulb. Below a graph showing the color temperature for different inclination angles.

## Lamp measurement report – 19 Oct 2011

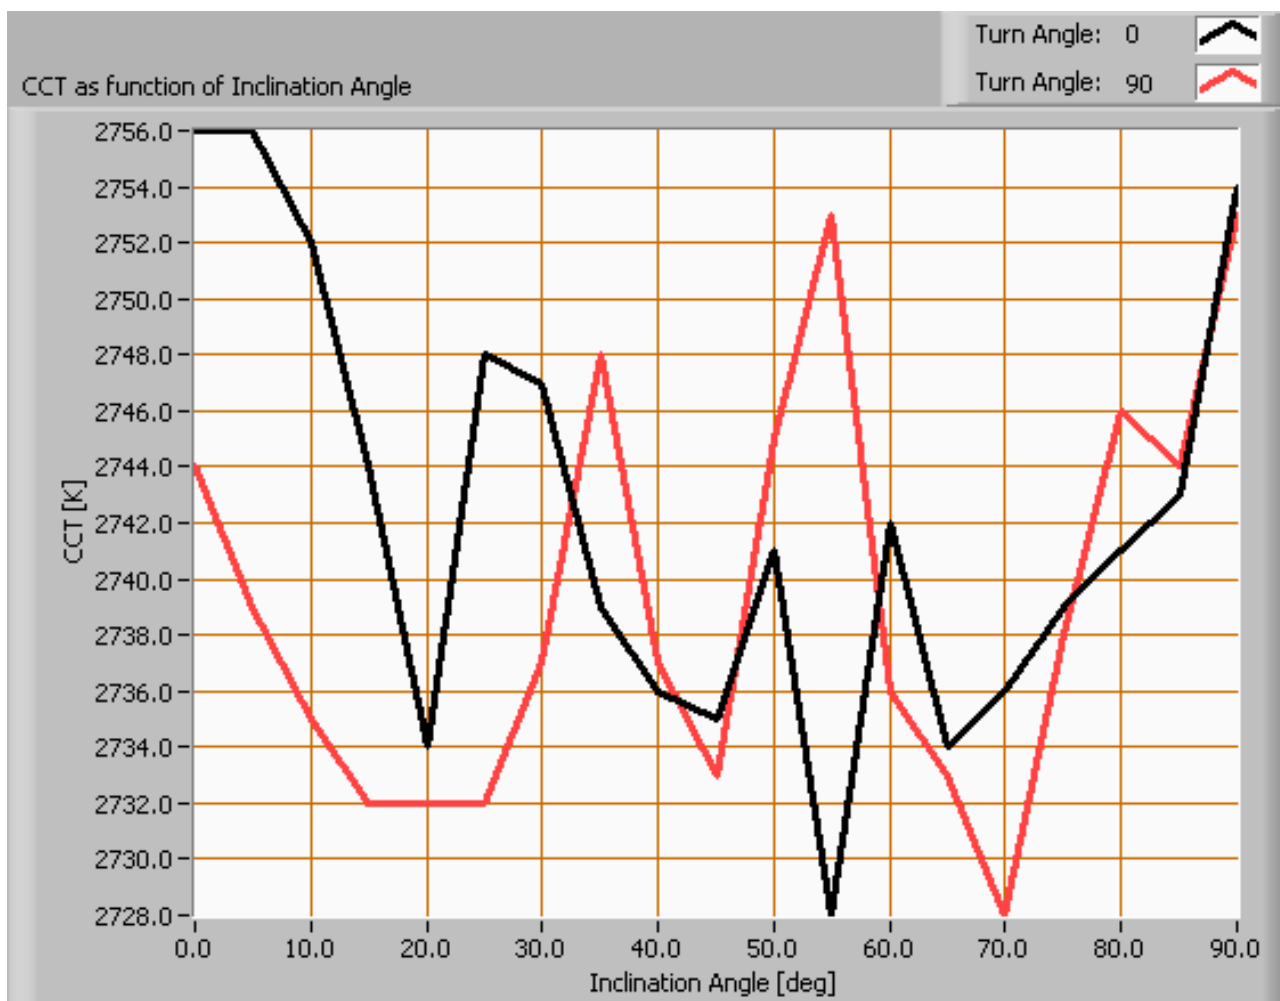

### *Color temperature as a function of inclination angle.*

The color temperature is given for inclination angles up to 90 deg. Beyond that angle has not been measured.


For the C0-C180 plane: the beam angle of 297 deg is equivalent to 148.4 deg inclination angle, which is the area where most of the light falls within. The maximum variation of color temperature in the first 90 degrees of this inclination area is about 1 %.

For the C90-C270 plane: the beam angle of 297 deg is equivalent to 148.4 deg inclination angle, which is the area where most of the light falls within. The maximum variation of color temperature in the first 90 degrees of this inclination area is about 1 %.

## Lamp measurement report – 19 Oct 2011

### PAR value and PAR spectrum

To make a statement how well the light of this light bulb is for growing plants, the PAR-area needs to be determined. See the explanation about PAR on the OliNo website how this all is determined and the explanation of the graph.

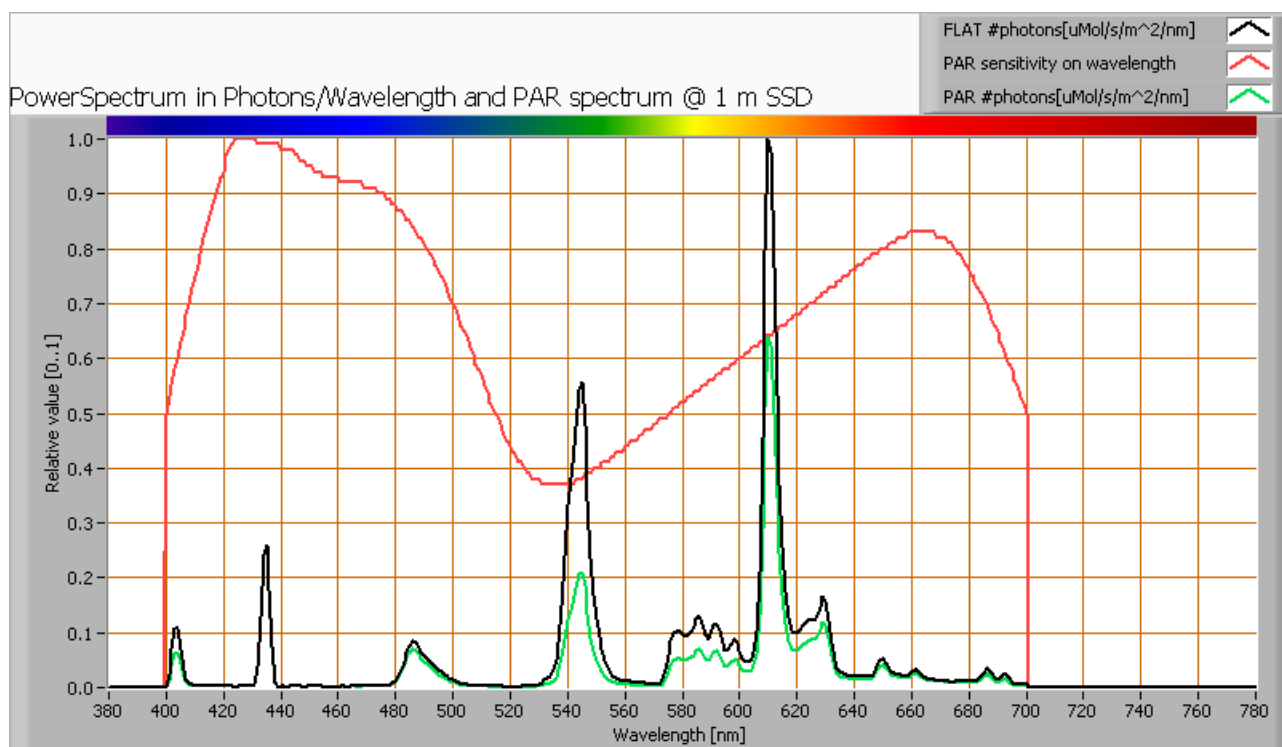

*The photon spectrum, then the sensitivity curve and as result the final PAR spectrum of the light of this light bulb*


parameter	value	unit
PAR-number	0.8	uMol/s/m <sup>2</sup>
PAR-photon current	9.8	uMol/s
PAR-photon efficacy	0.5	uMol/s/W

The PAR efficiency is 60 % (valid for the PAR wave length range of 400 - 700 nm). This is the maximum percentage of the total of photons in the light that is effectively used by the average plant (since the plant might not take 100 % of the photons at the frequency where its relative sensitivity is 100 %).

## Lamp measurement report – 19 Oct 2011

### S/P ratio

The S/P ratio and measurement is explained on the OliNo website. Here the results are given.

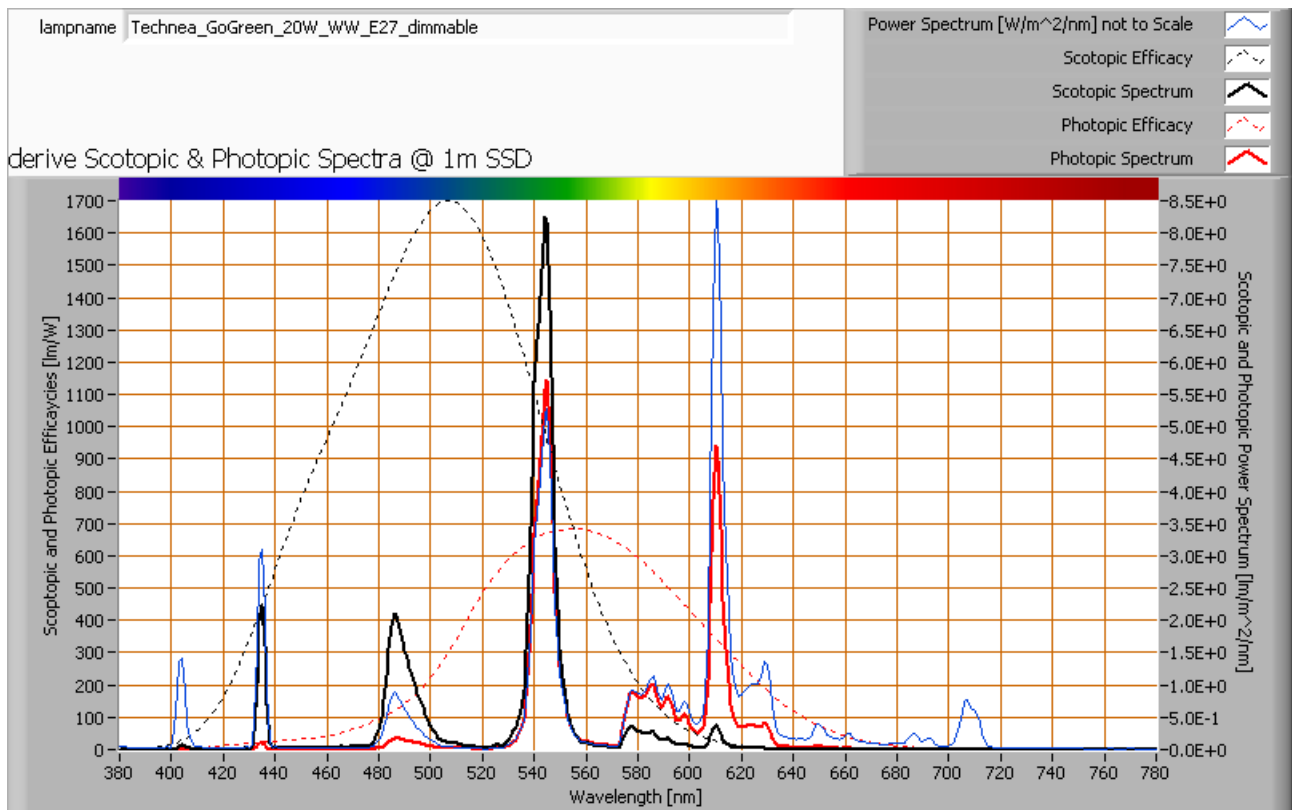

*The power spectrum, sensitivity curves and resulting scotopic and photopic spectra (spectra energy content defined at 1 m distance).*


The S/P ratio of the light coming from this lamp is 1.1.

More info on S/P ratio can be found on the OliNo website.



## Lamp measurement report – 19 Oct 2011

### Chromaticity diagram

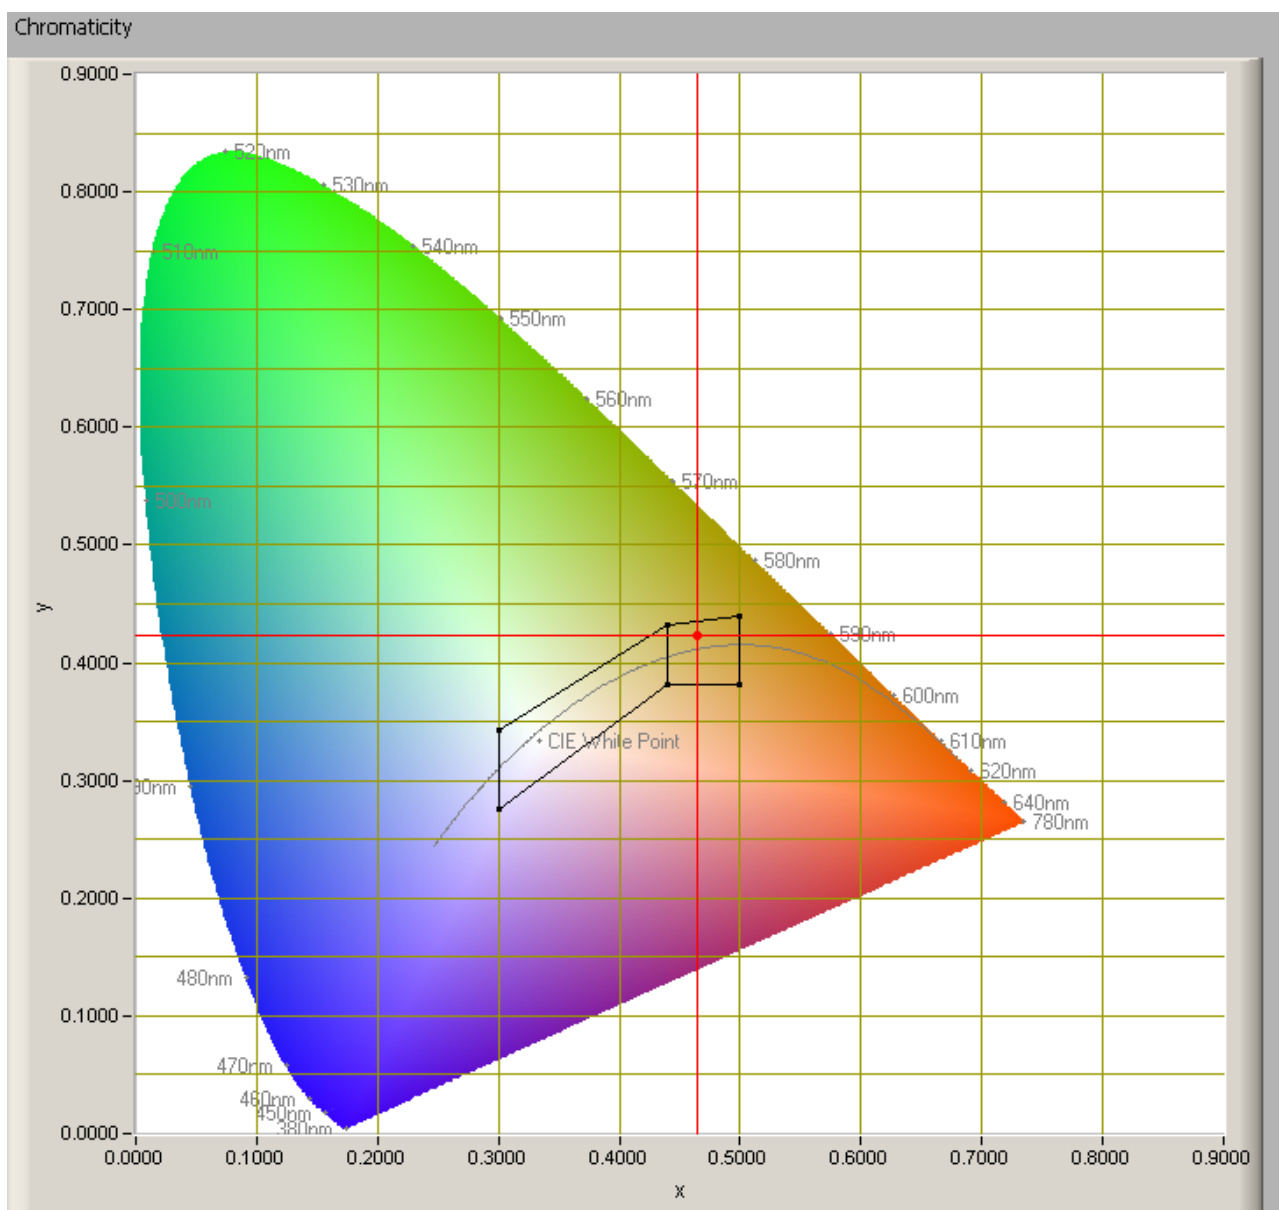

*The chromaticity space and the position of the lamp's color coordinates in it.*

The point of the light in this diagram is outside the area indicated with class B. This area indicates an area for signal lamps, see also the article on signal lamps and color areas on the OliNo website.

The color coordinates are  $x=0.4645$  and  $y=0.4234$ .

## Lamp measurement report – 19 Oct 2011

### Color Rendering Index (CRI) or also Ra















Herewith the image showing the CRI as well as how well different colors are represented (rendered). The higher the number, the better the resemblance with the color when a black body radiator would have been used (the sun, or an incandescent lamp). Practical information and also some critics about the CRI can be found on the OliNo website.

Each color has an index  $R_x$ , and the first 8 indexes ( $R1 \dots R8$ ) are averaged to compute the  $R_a$  which is equivalent to the CRI.

☐ manual

Reference Illuminant: Planckian radiator CCT: 2739 K

Chromaticity Difference DC= 1.2E-3

R1= 96.7		R8= 61.3	
R2= 95.6		R9= -15.3	
R3= 49		R10= 51.2	
R4= 86.3		R11= 82.4	
R5= 88.9		R12= 43.5	
R6= 84.3		R13= 92.4	
R7= 86.3		R14= 65	

**Ra**  
(mean value of  $R1 - R8$ )

**81**

*CRI of the light of this lightbulb.*

This value of 81 indicates how well the light of this lamp can render well a set of reference colors, this in comparison with the light of a reference source (for color temperatures  $< 5000\text{K}$  a black radiator is used as reference and for color temperatures  $> 5000\text{K}$  the sun or the light outside during the day).

The value of 81 is bigger than the value of 80 that is considered as a minimum for working areas in general.


Note: the chromaticity difference is 0.0012 and indicates the distance to the Planckian Locus. There is a value mentioned of max  $5.4\text{E-}3$  in section 5.3 of CIE 13.3-1995 however not further explanation of it. An other reference with signal lights as a reference is given in the chromaticity diagram.

### Voltage dependency

The dependency of a number of lamp parameters on the lamp voltage is determined. For

## Lamp measurement report – 19 Oct 2011

this, the lamp voltage has been varied and its effect on the following light bulb parameters measured: illuminance  $E_v$  [lx], the lamp power  $P$  [W] and the luminous efficacy [lm/W] (this latter is estimated here by dividing the found  $E_v$  value by  $P$ ).

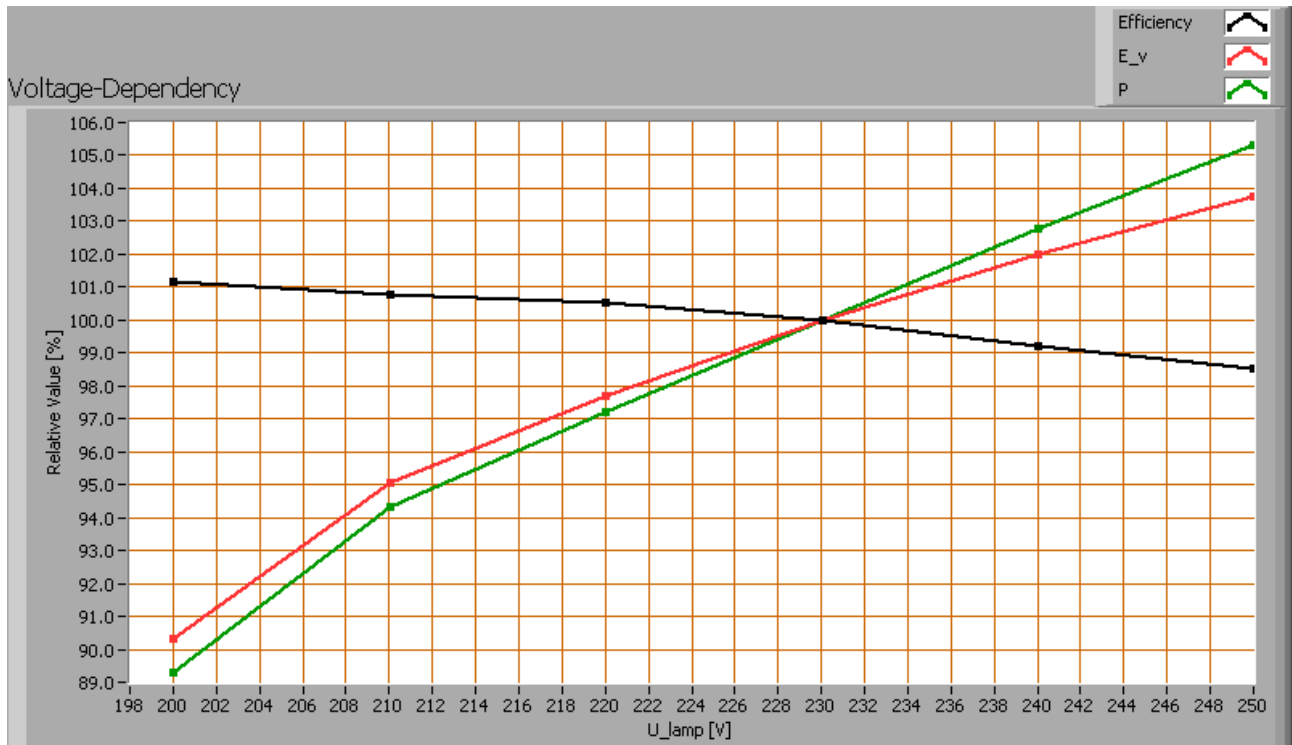

### *Lamp voltage dependencies of certain light bulb parameters*



There is a constant dependency of the illuminance when the power voltage varies between 200 - 250 V AC. There is a constant dependency of the consumed power when the power voltage varies between 200 - 250 V AC.

When the voltage varies abruptly with + or - 5 V AC then this results in a variation of the illuminance of maximally 1.1 %. This difference in illuminance is not visible (when it occurs abruptly).

## Warm up effects

After switch on of a cold lamp, the effect of heating up of the lamp is measured on illuminance  $E_v$  [lx], the lamp power  $P$  [W] and the luminous efficacy [lm/W].

## Lamp measurement report – 19 Oct 2011

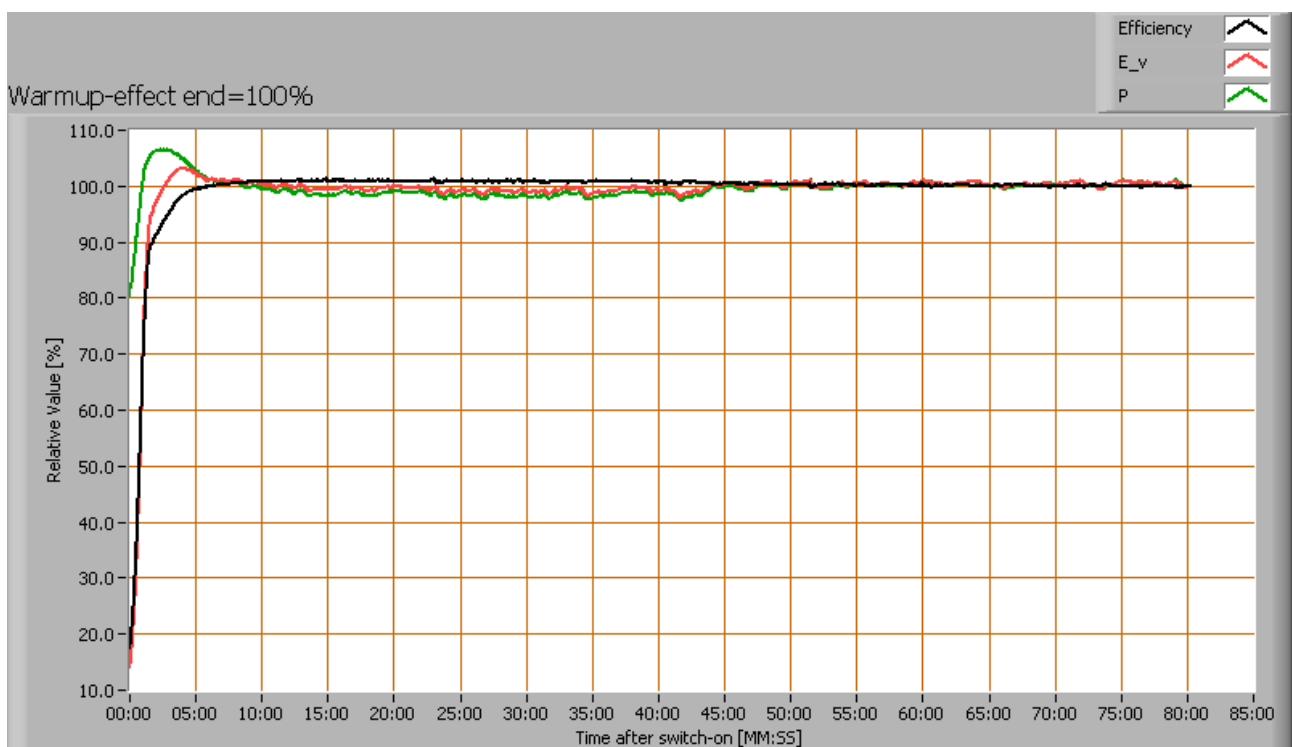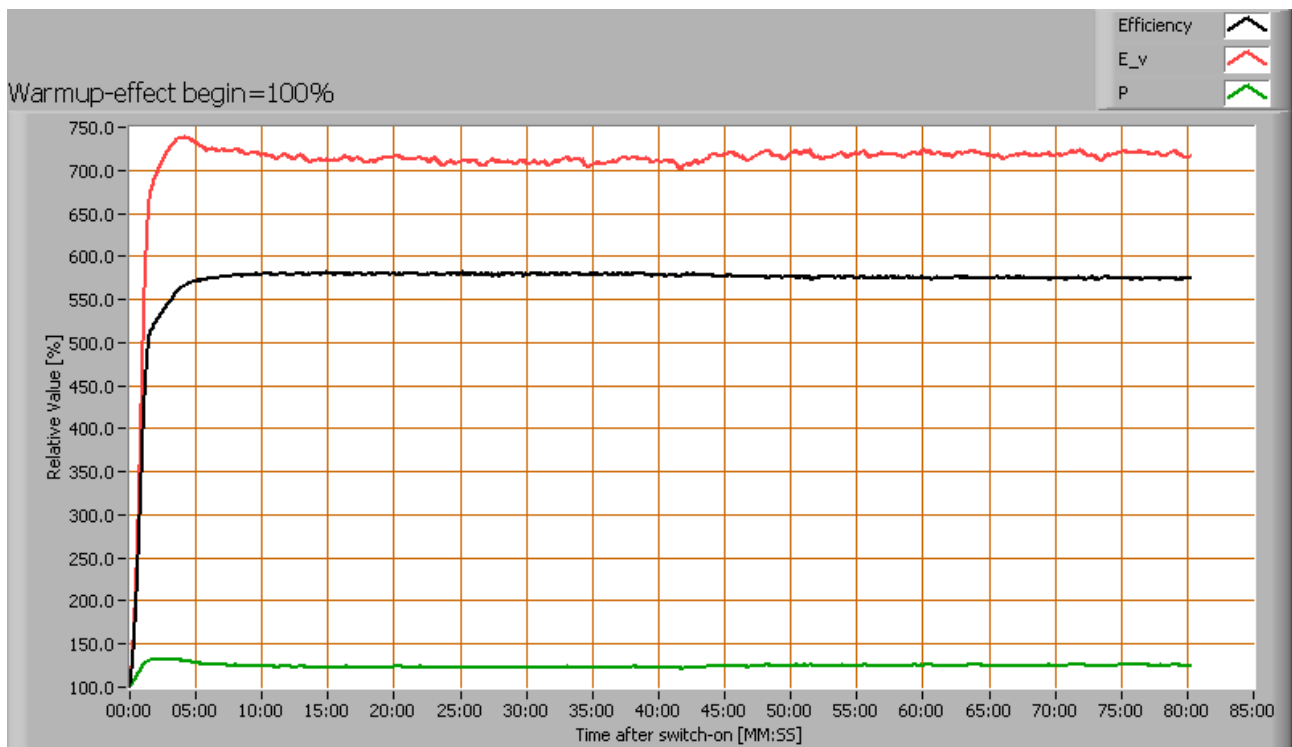

Effect of warming up on different light bulb parameters. In the first graph the 100 % level is put at begin, and in the last graph the 100 % level is put at the end.

During the warmup time the illuminance varies during 6 minutes and increases with 620


## Lamp measurement report – 19 Oct 2011

%.

During the warmup time the power varies during 6 minutes and increases with 50 %.

### Measure of flickering

An analysis is done on the measure of flickering of the light output by this light bulb. See the article on flickering on OliNo site for more information.

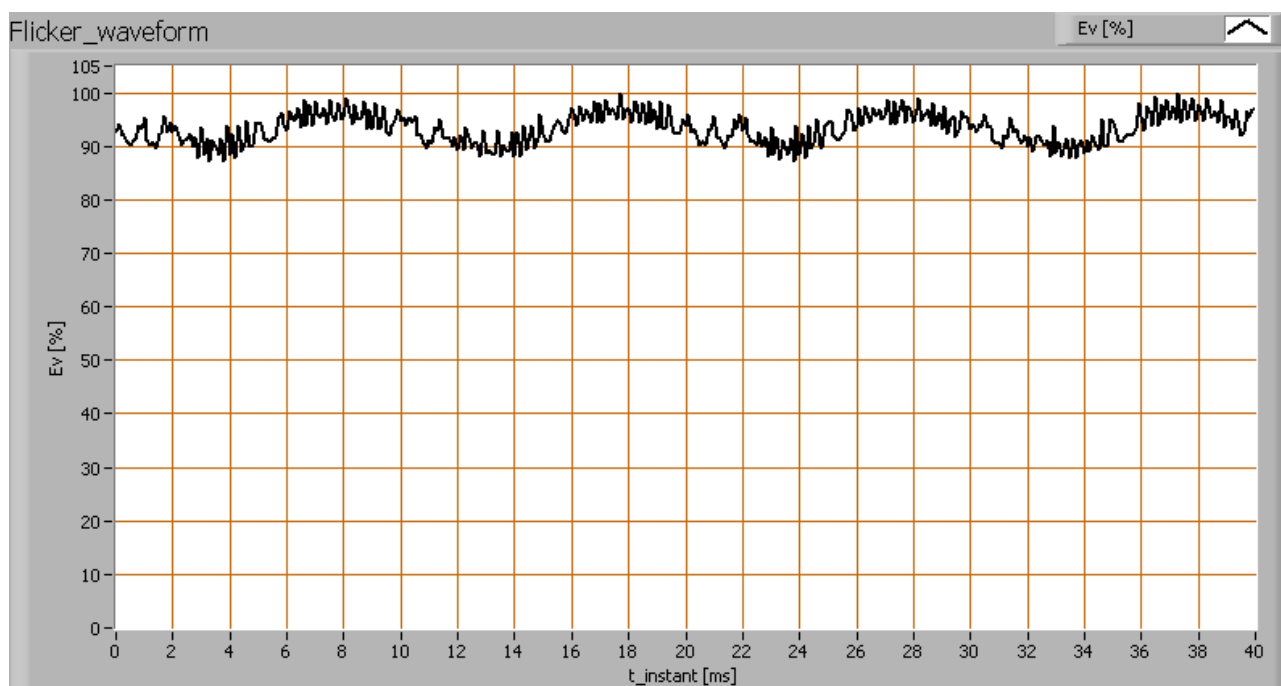

*The measure of fast illuminance variation of the light of the light bulb*

parameter	value	unit
Flicker frequency	99.7	Hz
Illuminance modulation index	7	%


The illuminance modulation index is computed as:  $(\max\_Ev - \min\_Ev) / (\max\_Ev + \min\_Ev)$ .

### Dimmability

The lamp has been tested on the following dimmers: the elimpo, Gira RL, Berker RC and the low power LRC dimmer. See for a description and their specification the practical dimmer explanation article on OliNo.

## Lamp measurement report – 19 Oct 2011

The Gira LR Dimmer.

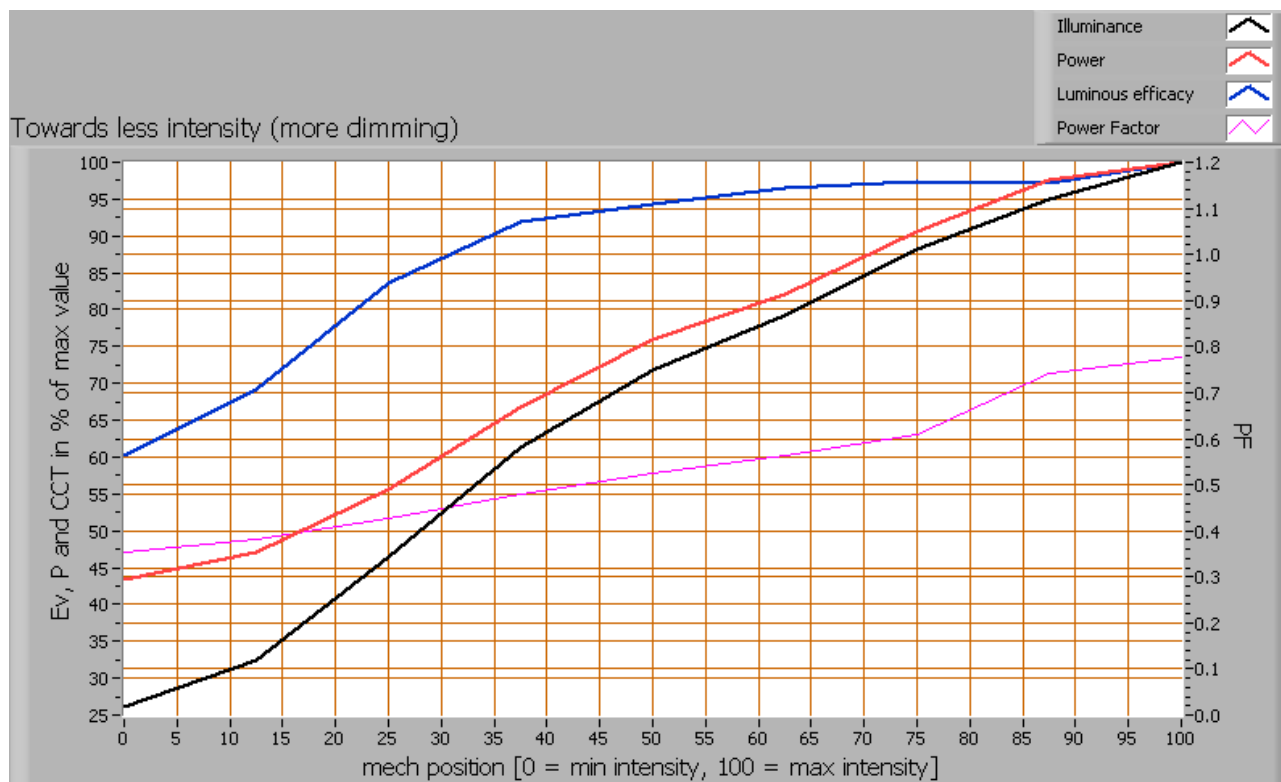

### Dimming with the Gira LR Dimmer.


When inserting the dimmer at its no dimming position and the comparing with the situation without dimmer, then the influence on the following parameters is measured (negative value is increase): - the illuminance: 1 %; - the consumed power: -0 %.

The intensity is variable in the mechanical area between 0.0 - 100.0 %. The dimmer set in that area results in a variation of the illuminance between 26 - 100 % (note that in that 100 % the drop in illuminance when inserting the dimmer is not counted, see for that value above).

The remaining power consumption at maximal dimming position is 7.9 W.

## Lamp measurement report – 19 Oct 2011

### The Elimpo Dimmer.

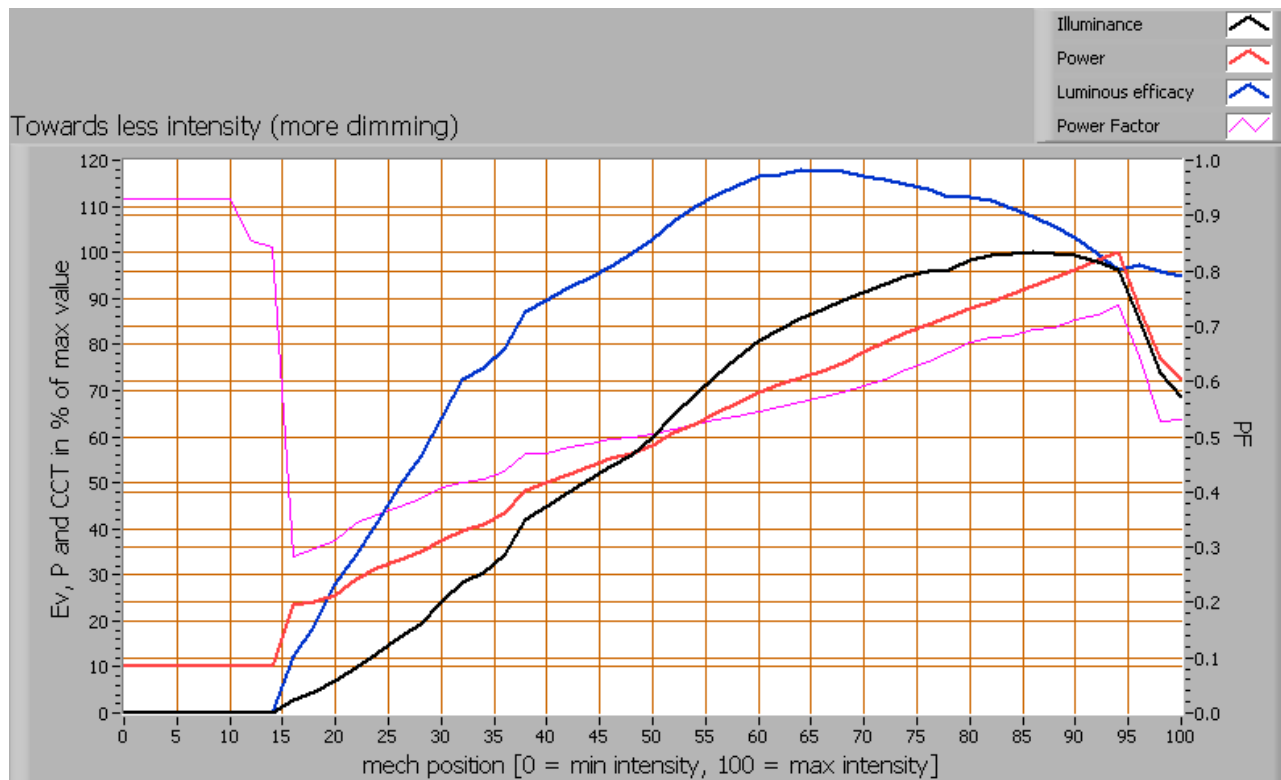

### Dimming with the Elimpo Dimmer.

When inserting the dimmer at its no dimming position and the comparing with the situation without dimmer, then the influence on the following parameters is measured (negative value is increase): - the illuminance: 21 %; - the consumed power: 24 %.


The intensity is variable in the mechanical area between 4.0 - 94.0 %. The dimmer set in that area results in a variation of the illuminance between 0 - 100 % (note that in that 100 % the drop in illuminance when inserting the dimmer is not counted, see for that value above).

The remaining power consumption at maximal dimming position is 1.9 W.



## Lamp measurement report – 19 Oct 2011

The Low power LRC Dimmer.

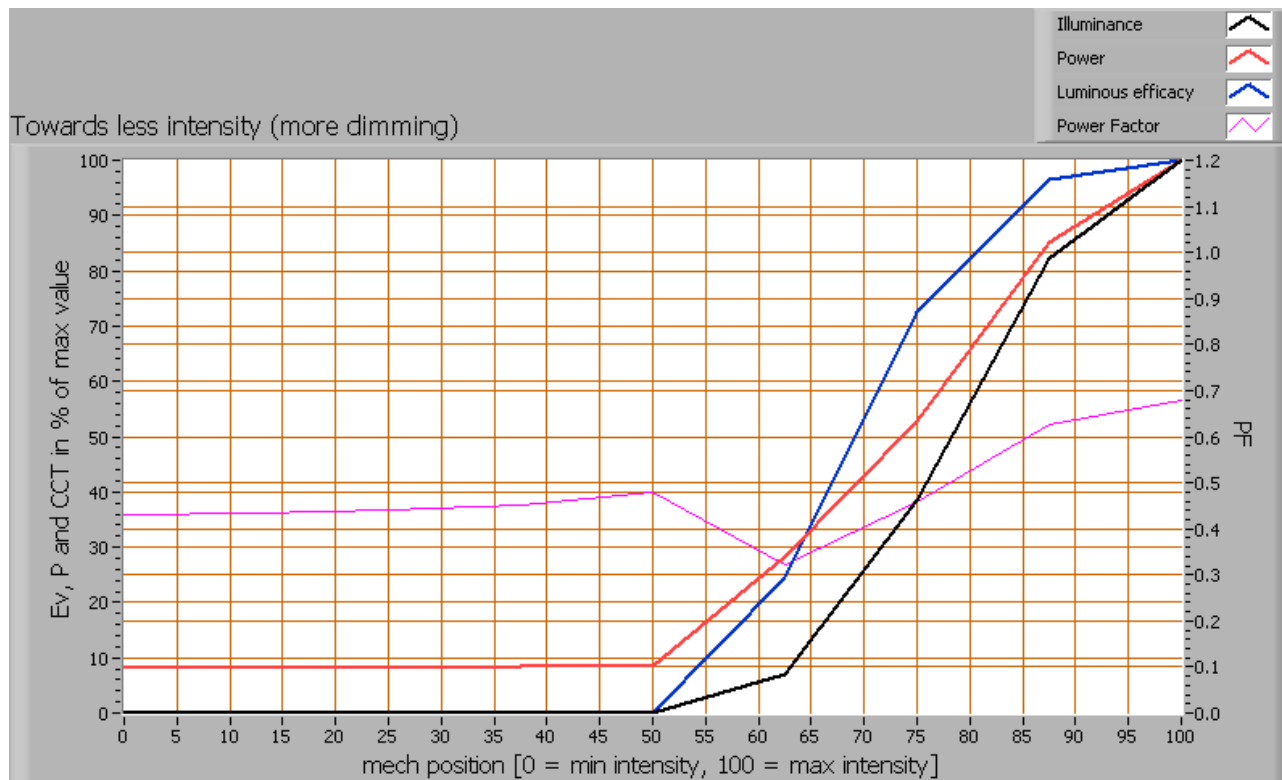

### Dimming with the Low power LRC Dimmer.


When inserting the dimmer at its no dimming position and the comparing with the situation without dimmer, then the influence on the following parameters is measured (negative value is increase): - the illuminance: 3 %; - the consumed power: -4 %.

The intensity is variable in the mechanical area between 37.5 - 100.0 %. The dimmer set in that area results in a variation of the illuminance between 0 - 100 % (note that in that 100 % the drop in illuminance when inserting the dimmer is not counted, see for that value above).

The remaining power consumption at maximal dimming position is 1.5 W.

## Lamp measurement report – 19 Oct 2011

The Berker RC Dimmer.

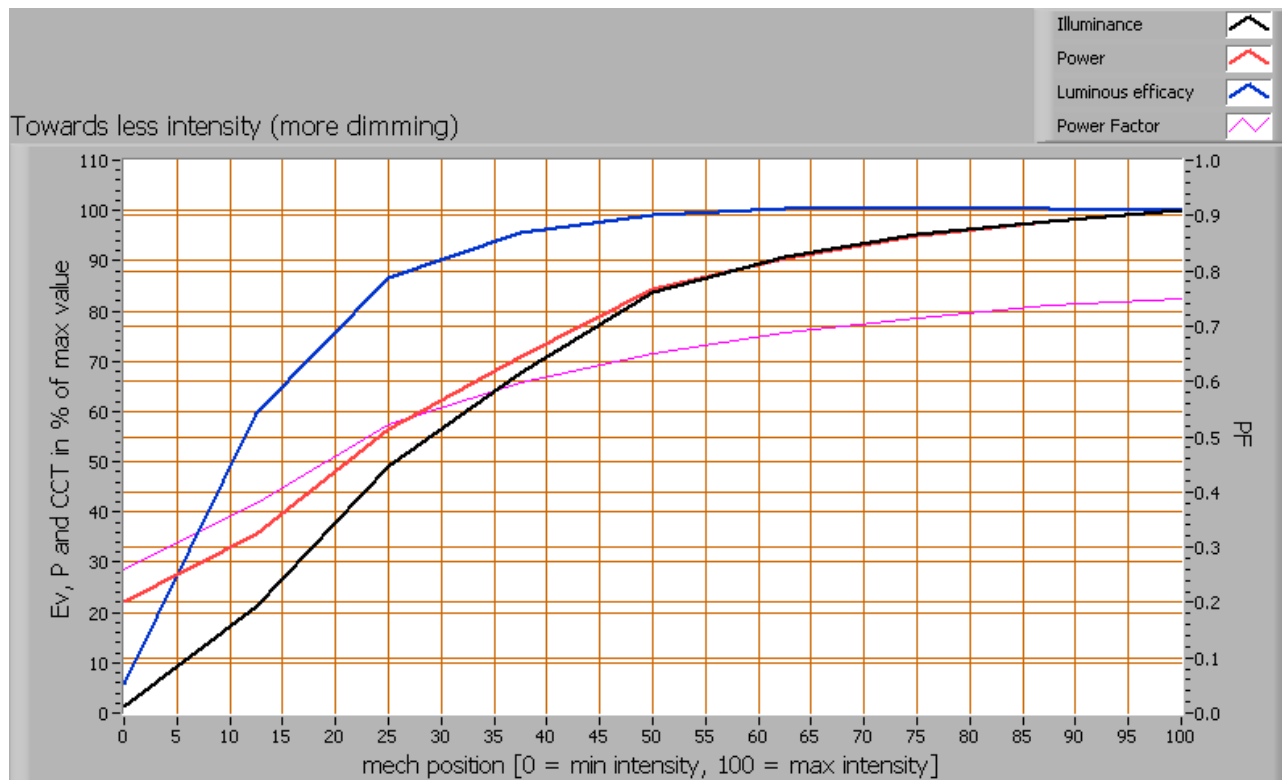

### Dimming with the Berker RC Dimmer.


When inserting the dimmer at its no dimming position and the comparing with the situation without dimmer, then the influence on the following parameters is measured (negative value is increase): - the illuminance: -6 %; - the consumed power: -6 %.

The intensity is variable in the mechanical area between 0.0 - 100.0 %. The dimmer set in that area results in a variation of the illuminance between 1 - 100 % (note that in that 100 % the drop in illuminance when inserting the dimmer is not counted, see for that value above).

The remaining power consumption at maximal dimming position is 4.1 W.

## Lamp measurement report – 19 Oct 2011

The low-cost DIY dimmer.

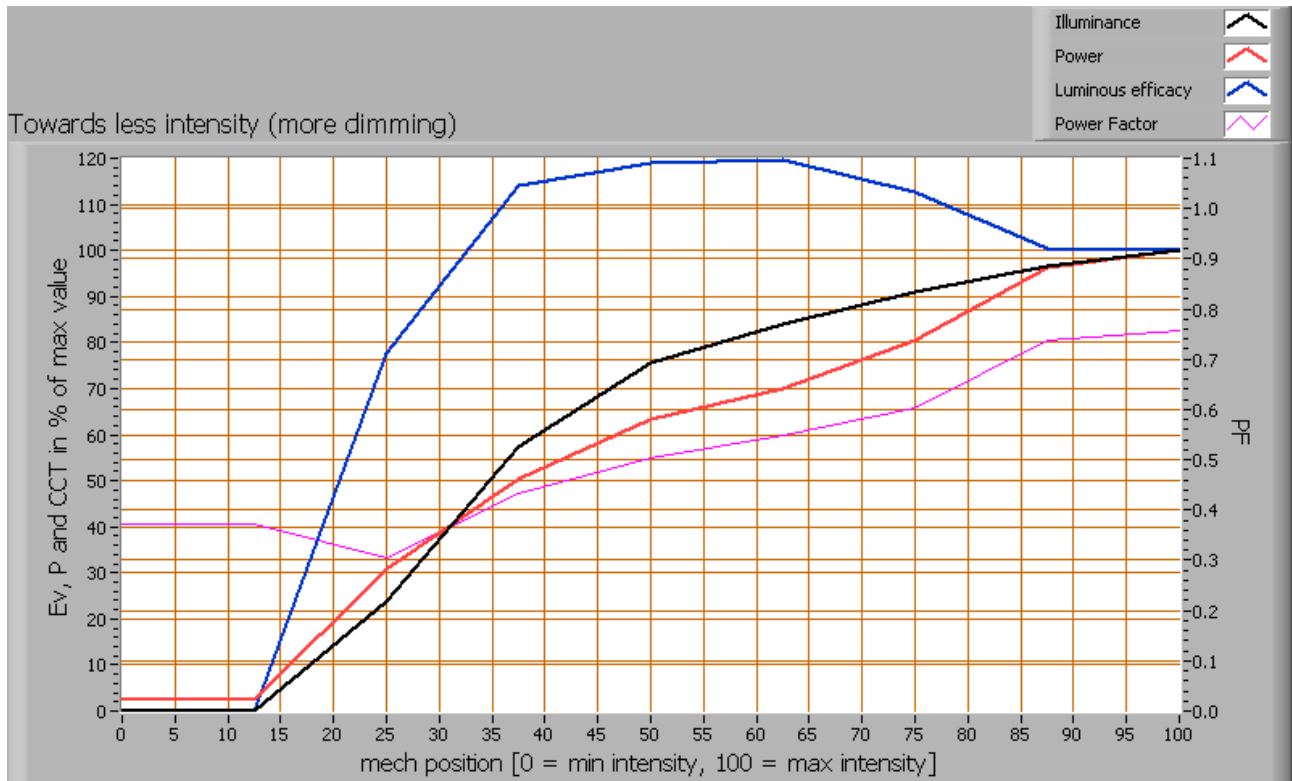

### *Dimming with the low cost Dimmer.*

When inserting the dimmer at its no dimming position and the comparing with the situation without dimmer, then the influence on the following parameters is measured (negative value is increase): - the illuminance: -2 %; - the consumed power: -2 %.

The intensity is variable in the mechanical area between 12.5 - 100.0 %. The dimmer set in that area results in a variation of the illuminance between 0 - 100 % (note that in that 100 % the drop in illuminance when inserting the dimmer is not counted, see for that value above).

The remaining power consumption at maximal dimming position is 0.4 W.

## Lamp measurement report – 19 Oct 2011


### Biologic effect

The biologic effect shows the level of impact the light of this lamp can have on the day-night rhythm of human beings (as well as the suppression of melatonin production). See also the explanatory article on biologic effect on OliNo. The important parameters (according to prEN 5031-100:2009-06):

biologic effect factor	0.253
$k_{\text{biol trans}}$ (25 years)	1.000
$k_{\text{biol trans}}$ (50 years)	0.741
$k_{\text{biol trans}}$ (75 years)	0.487
$k_{\text{pupil}}$ (25 years)	1.000
$k_{\text{pupil}}$ (50 years)	0.740
$k_{\text{pupil}}$ (75 years)	0.519

### Blue Light Hazard

The amount of blue light and the harm it can cause on the retina has been determined. Herewith the results. See for more info the explanation about blue light hazard on the OliNo site.

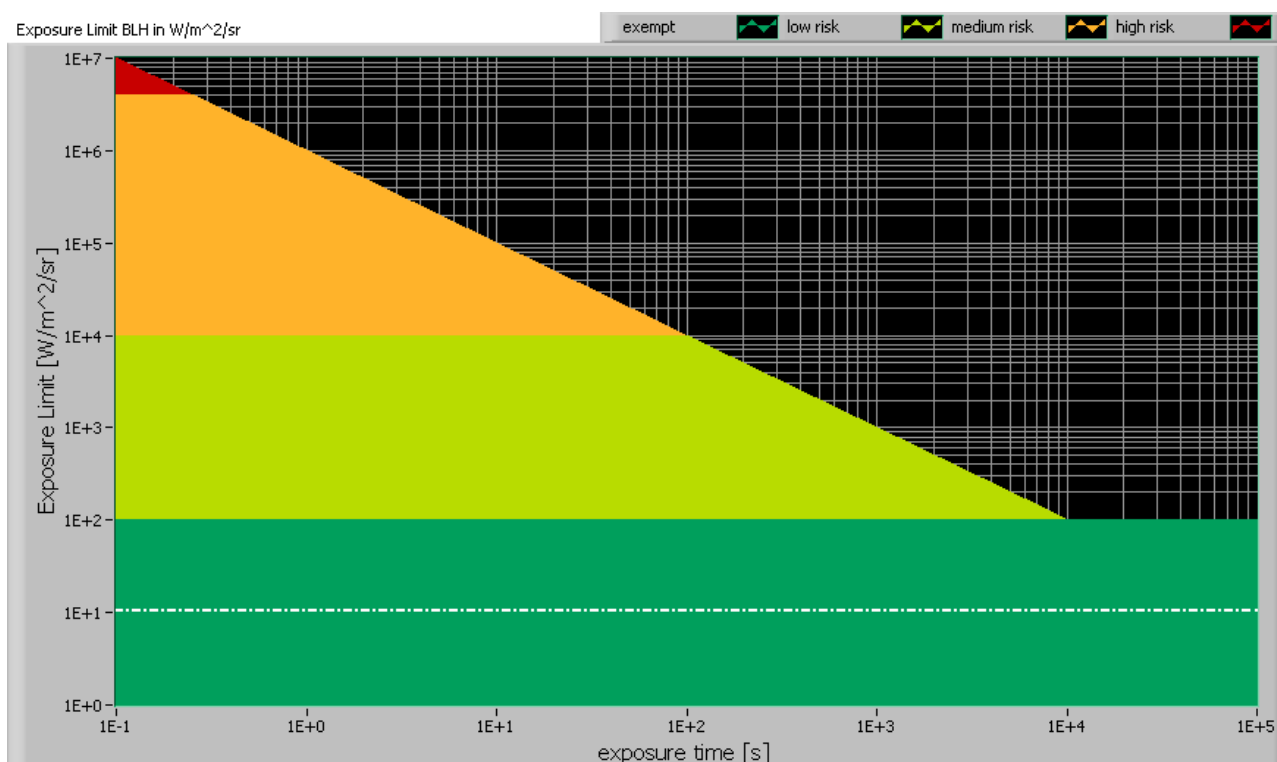

## Lamp measurement report – 19 Oct 2011

*The level of blue light of this lamp related to the exposure limit and the different classification areas.*

L_lum0 [mm]	58	Luminous dimension of lamp in C0-C180 direction.
L_lum90 [mm]	58	Luminous dimension of lamp in C90-C270 direction.
SSD_500lx [mm]	487	Calculated distance where $E_v = 500$ lux. This computation is valid when it is in the far field of the lamp. Note: if this value < 200 mm then the distance of 200 mm is taken as proposed in the norm IEC 62471:2006.
Start of far field [mm]	410	Minimum distance at which the lamp can be seen as a point source. In this area the $E_v$ is linearly dependent from $(1/\text{distance})^2$ .
300-350 nm values stuffed with 0s	yes	In the event OliNo has measured with a SpB1211 spectrometer without UV option then the irradiance data of 300-349 nm is missing. For lamps where there is already no energy content near 350 nm, the values 300-349 can also be set at zero then.
$\alpha_{C0-C180}$ [rad]	0.119	(Apparent) source angle in C0-C180 direction.
$\alpha_{C90-C270}$ [rad]	0.119	(Apparent) source angle in C90-C270 direction.
$\alpha_{AVG}$ [rad]	0.100	Average (apparent) source angle. If average $\geq 0.011$ rad then the exposure limit is computed with radiance $L_b$ . Otherwise with irradiance $E_b$ .
Exposure value [W/m <sup>2</sup> /sr]	1.03E+1	Blue Light Hazard value for this lamp, measured straight underneath the lamp. Computation is referenced to $L_b$ .
Blue Light Hazard risk group	0	0=exempt, 1=low, 2 = moderate, 3=high risk.

### Disclaimer

The information in this OliNo report is created with the utmost care. Despite this, the information could contain inaccuracies. OliNo cannot be held liable in this instance nor can the data in this report be legally binding.

We strive to adhere to all of the conditions of any copyright holder in the publication of any illustration/article or item. In the event that we unintentionally violate said copyright holder's



## **Lamp measurement report – 19 Oct 2011**

conditions in our articles, we kindly ask to be contacted here at OliNo so that we can resolve any disputes, issues or misunderstandings.

### **License**

It is permitted ONLY to use or publish this report in its entirety and in unaltered form via internet or other digital or written media in any form. To guarantee the reliability and accuracy of the report, it is strictly prohibited to change or alter parts of the report and/or republish it in a modified content.