

**Lamp measurement report - 29 March 2018**

**Triton LED Downlight 32W 840 3724lm 196x80.5mm**

by

**DMLUX**



## Lamp measurement report - 29 March 2018

### Summary measurement data dated 2018-03-28

parameter	meas. result	remark
Color temperature	3997 K	warm/neutral white
Luminous intensity I <sub>v</sub>	2376.4 Cd	Measured straight underneath the lamp.
Illuminance modulation index	45 %	Measured with a light sensor looking at the lamp (angle not defined). Is a measure for the amount of flickering.
Beam angle	69 deg	69 deg is the beam angle for all C-planes since the lamp is symmetrical along its 1st axis.
Power P	32.2 W	The net power consumed.
Power Factor	0.96	An electrical load with this power factor means that for every 1 kWh net energy consumed, there has been 0.29 kVAhr for reactive energy.
THD	13 %	Total Harmonic Distortion.
Max inrush current	1.283 A	This current has been found at a voltage start angle of 100 degrees.
Luminous flux	3724 lm	Measured with photogoniometer, calculation done as described in LM79-08.
Luminous efficacy	116 lm/W	
EU2013-label classification	A+	The energy class, from A++ (more efficient) to E (least efficient). This label is an update of the previous version, and compulsory from Sept 2013.
CRI_Ra	82	Color Rendering Index.
Rf_TM30	82	TM30-15 is an improved indicator (over CRI) of how well colors are rendered.
Rg_TM30	94	Gamut Area Ratio.
Coordinates chromaticity diagram	x=0.3814 en y=0.3801	
Fitting	230V	This lamp is connected via an external power supply to the grid voltage.
PAR-photon current	33.0 uMol/s	The number of photons seen by an average plant when it is lit by the light of this light bulb (weighted cf DIN-norm 5031-10:2000)
PAR-photon efficacy	1.0 uMol/s/W <sub>e</sub>	The total emitted number of photons by this light, divided by its consumption in W. It indicates a kind of efficacy in generating photons.
Photon current	53.3 uMol/s	The total number of photons in the light of this lamp.


## Lamp measurement report - 29 March 2018

parameter	meas. result	remark
Luminous flux for chicken	6367 cLm	Total radiant flux adjusted by color sensitivity curve (from 350 - 780 nm) of chickens ( <i>Gallus domesticus</i> ).
S/P ratio	1.7	This factor indicates the amount of times more efficient the light of this light bulb is perceived under scotopic circumstances (low environmental light level).
D x H external dimensions	195 mm x 82 mm	External dimensions of the lamp.
D luminous area	151 mm	Dimensions of the luminous area (used in Eulumdat file). It is the surface of the diffuser at the front side.
General remarks		<p>The ambient temperature during the whole set of illuminance measurements was 24.1 - 25.1 deg C. The temperature of the lamp gets maximally about 31 degrees hotter than ambient temperature.</p> <p>Warm up effect: During the warmup time the illuminance doesn't vary significantly (&lt; 5 %).</p> <p>During the warmup time the power doesn't vary significantly (&lt; 5 %).</p> <p>The variation in efficacy (calculated as indication by simply dividing the illuminance by the power) during the warming up is -2 %.</p> <p>A very high negative value indicates a significant decrease for instance due to heating up of the lamp (decrease of lifetime).</p> <p>Voltage dependency: There is no (significant) dependency of the illuminance when the power voltage varies between 200 - 250 V AC.</p> <p>There is no (significant) dependency of the consumed power when the power voltage varies between 200 - 250 V AC.</p> <p>At the end of the article an additional photo.</p>
Eff-variation	-2 %	This is the variation in efficacy (calculated as indication by simply dividing the illuminance by the power) during the warming up. A very high negative value indicates a significant decrease for instance due to heating up of the lamp (decrease of lifetime).
Dimmable	no	Info from manufacturer.
Melanopic effect factor	0.564	According to norm DIN SPEC 5031-100:2015-08.
Blue Light Hazard risk group	0	0=exempt, 1=low, 2 = moderate, 3=high risk. Indication value only for straight underneath the lamp.
form factor	recessed	

## Lamp measurement report - 29 March 2018

parameter	meas. result	remark
article number	DM720955-NT	

### Overview table

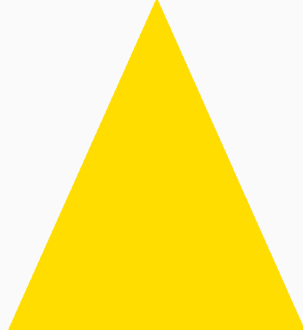m.	Ø 50%		C0-180: 69° C90-270: 69°	E (lux)	Luminaire Efficacy
	C0-180	C90-270			116 (lumen per Watt)
1	1.4	1.4		2376	Half-peak diam C0-180
1.5	2.1	2.1		1056	1.37 x diameter(m)
2	2.7	2.7		594	Half-peak diam C90-270
2.5	3.4	3.4		380	1.37 x diameter(m)
3	4.1	4.1		264	Illuminance
3.5	4.8	4.8		194	2376 / distance² (lux)
4	5.5	5.5		149	Total Output
					3724 (lumen)

Please note that this overview table makes use of calculations, use this data with care as explained on the OliNo site.

## Lamp measurement report - 29 March 2018

### EU 2013 Energy label classification

Since Sept 2013 these labels will be needed.


Important for the energy classification are the corrected rated power and the useful luminous flux.

The measured rated power is 32.2 W and might need to be corrected. The correction is dependent from the lamp type and whether or not the lamp control gear is included or not.

The choice for this lamp is the following classification: **Lamps with own control gear (external or internal)**. As a result the corrected rated power becomes: 32.2 W.


The luminous flux measured is 3724 lm. The classification of this lamp needed to determine the useful flux is: **Other directional lamps**. Then the useful flux becomes 2578 lm. Now a reference power can be calculated.

The energy efficiency coefficient is  $P_{\text{corr}} / P_{\text{ref}} = 0.17$ .

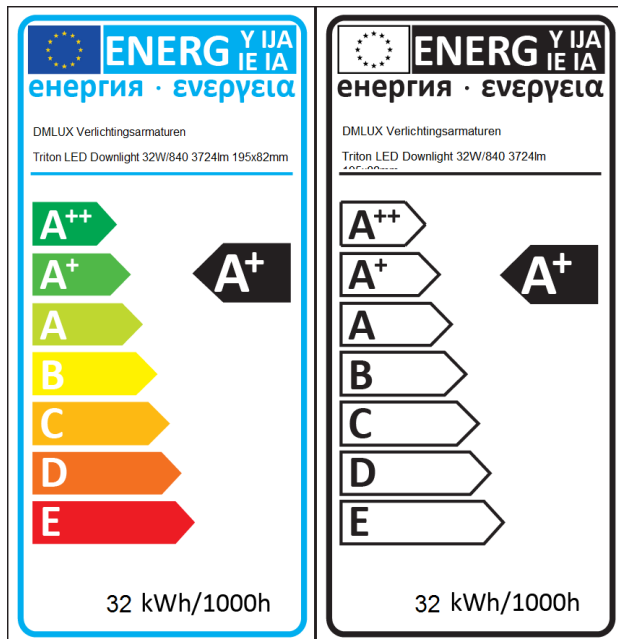

EU energy label for this lamp

## Lamp measurement report - 29 March 2018

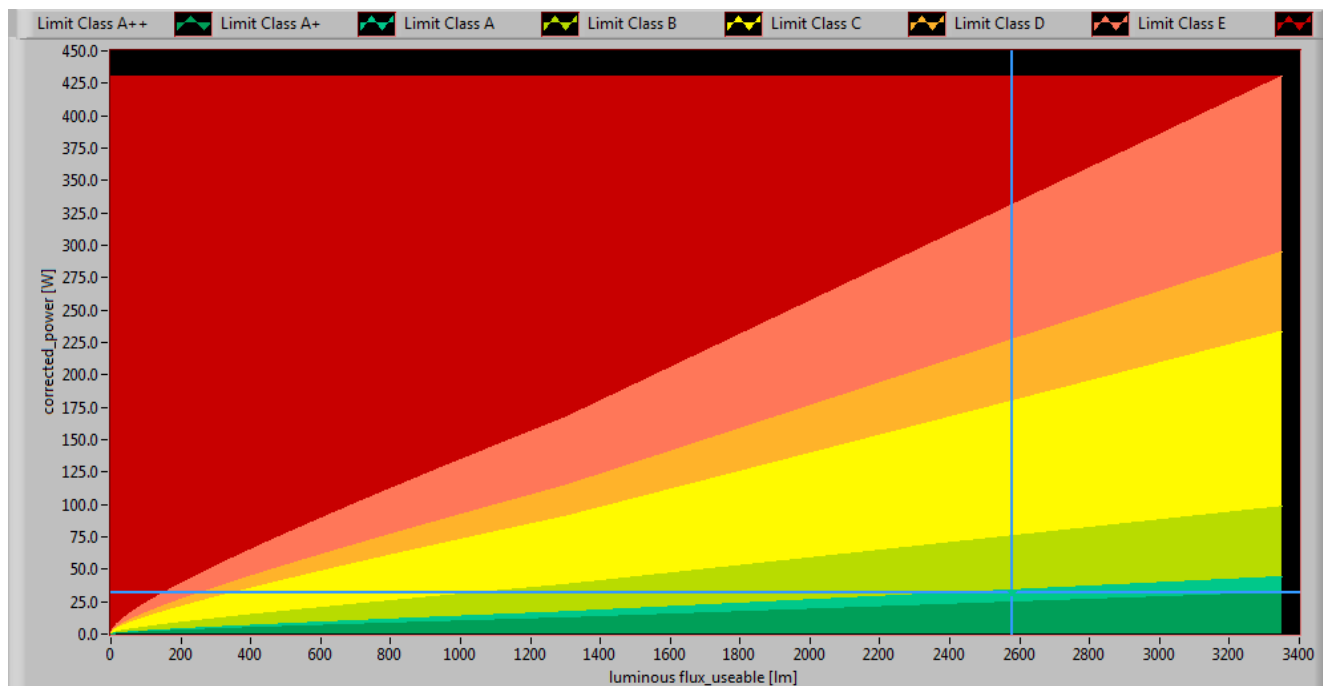


*The lamp's performance in the lumen-Watt field, with the energy efficacy fields indicated.*

## Lamp measurement report - 29 March 2018

### Eulumdat light diagram

This light diagram below comes from the program Qlumedit, that extracts these diagrams from an Eulumdat file.

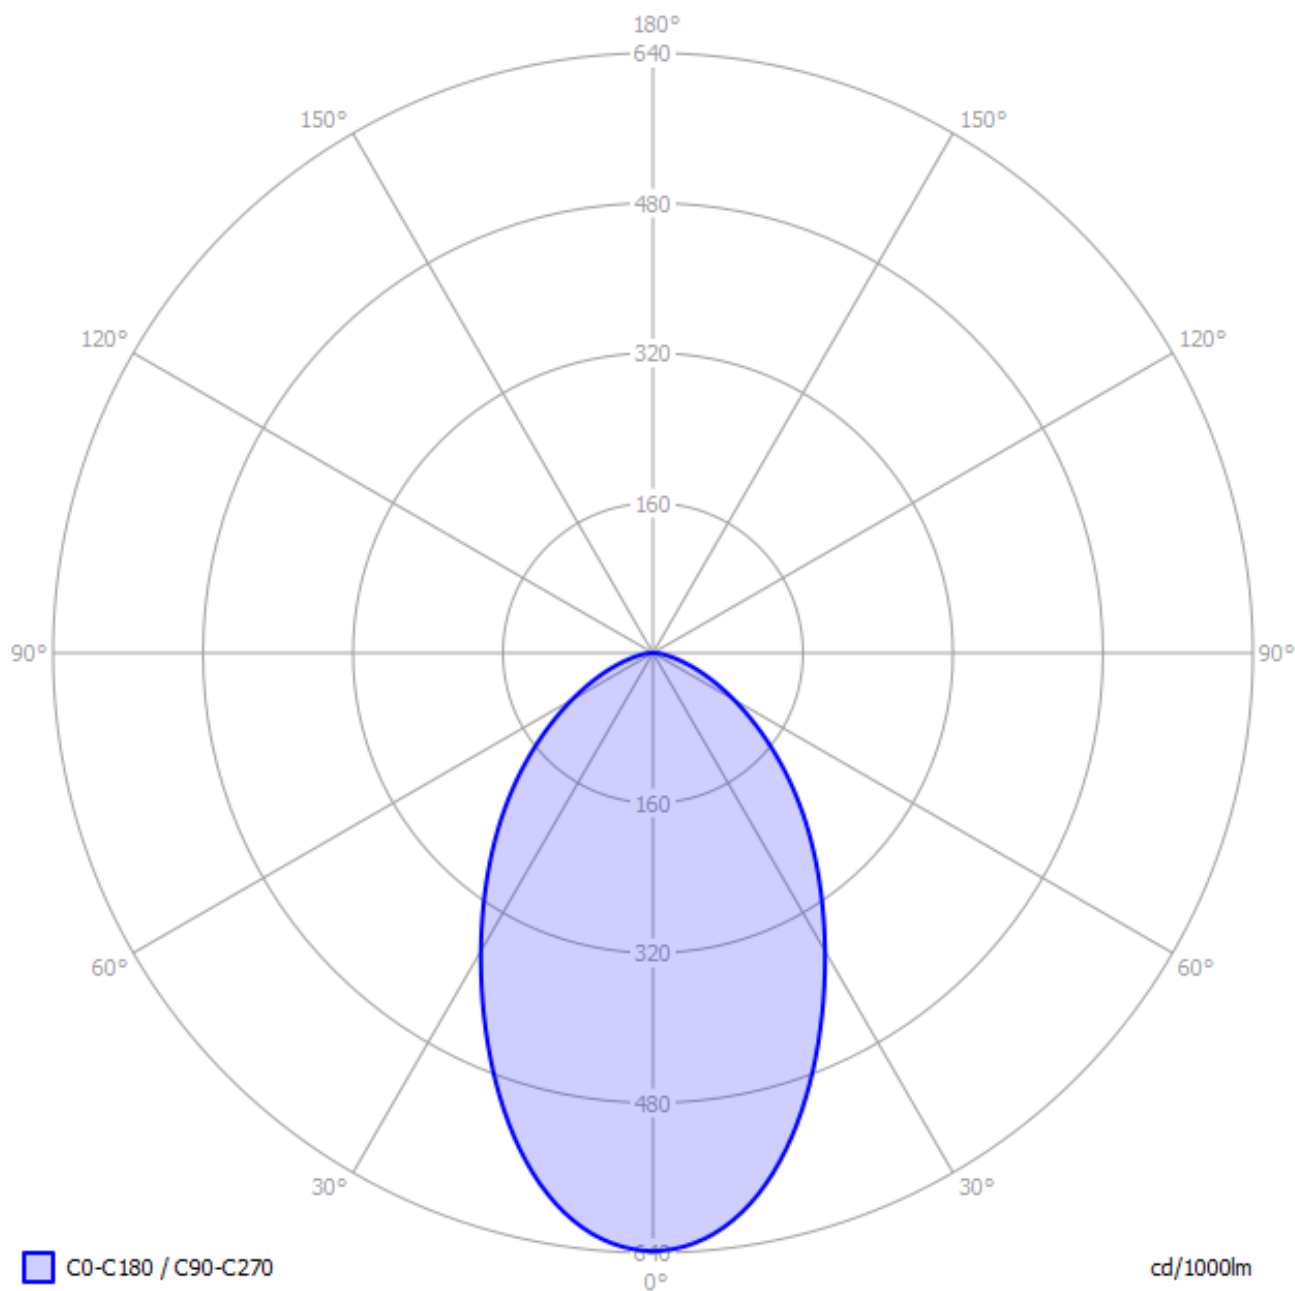


*The light diagram giving the radiation pattern.*

The light diagram indicates the beam in the C0-C180 plane and in the plane perpendicular to that, the C90-C270 plane. These beams are equal as the lamp has symmetry over its first axis (the vertical axis).

When using the Ev or Iv values per inclination angle, the beam angle can be computed, being 69 deg for the C0-C180 plane and 69 deg for the C90-C270 plane.




## Lamp measurement report - 29 March 2018

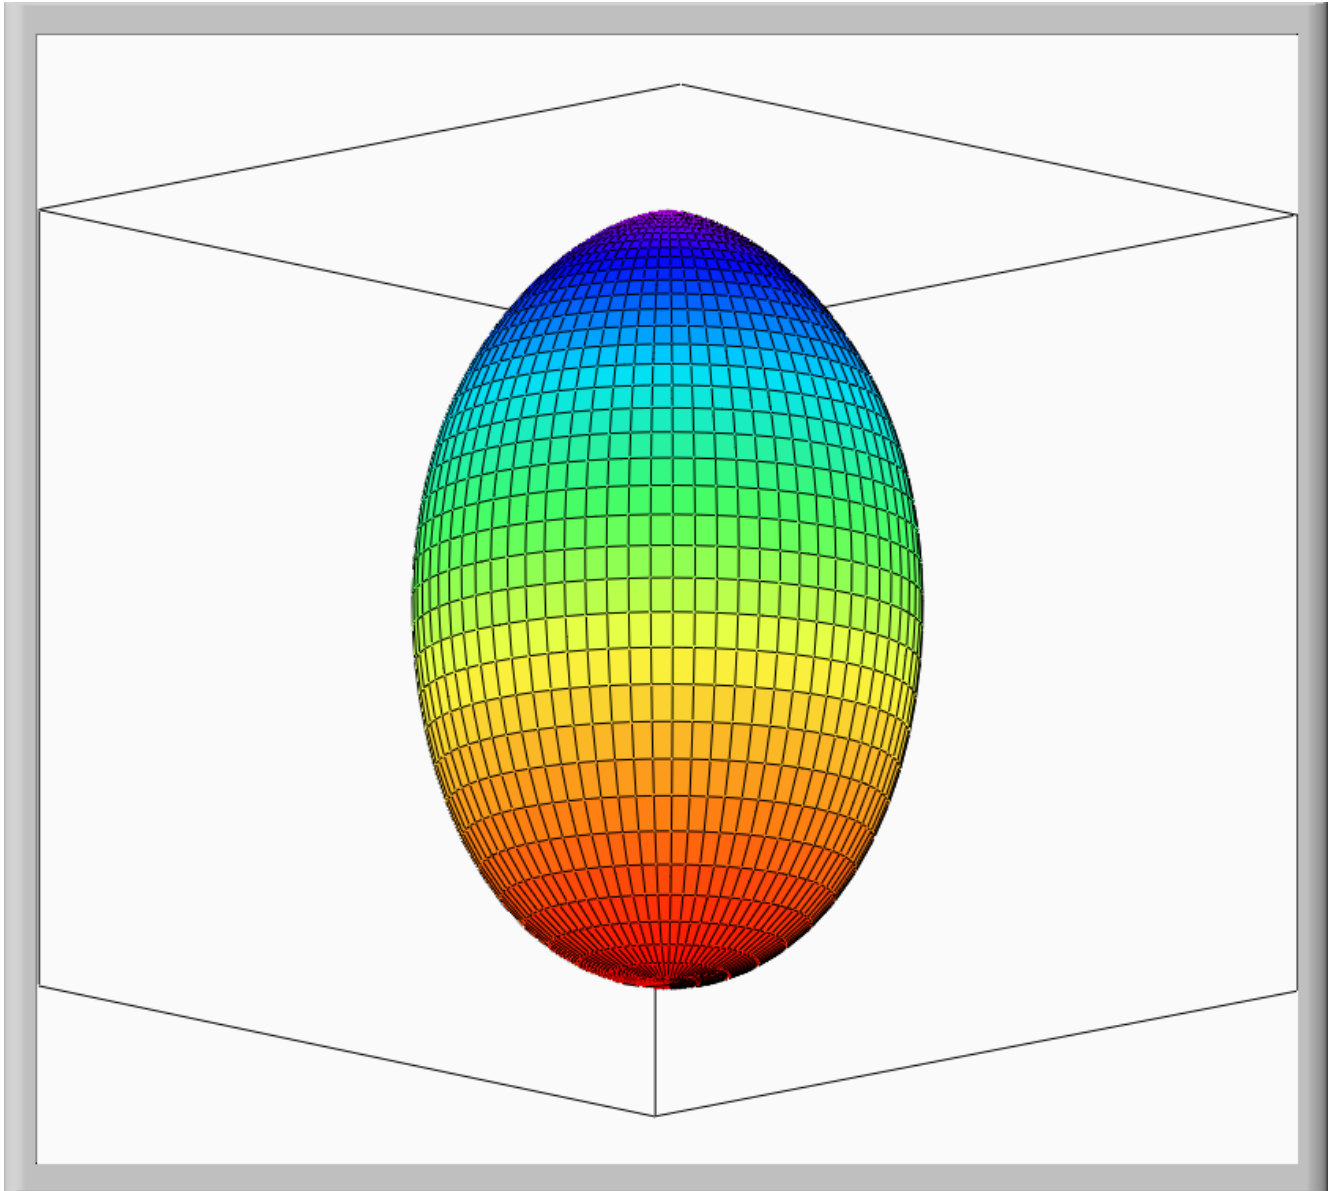

*Image of the light distribution pattern in 3D.*



## Lamp measurement report - 29 March 2018

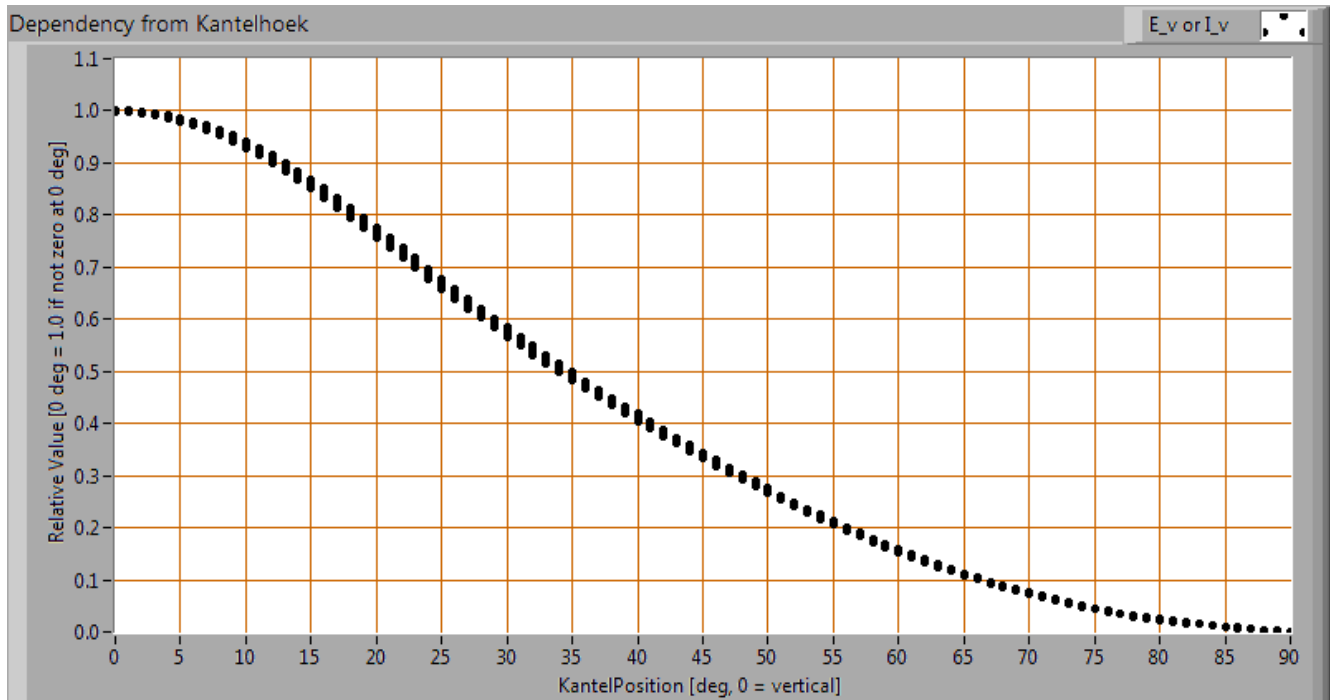

*Intensity data of every measured turn angle at each inclination angle.*

This plot shows per inclination angle the intensity measurement results for each turn angle at that inclination angle. There normally are differences in illuminance values for different turn angles. However for further calculations the averaged values will be used.

### Luminous flux

With the averaged illuminance data at 1 m distance, taken from the graph showing the averaged radiation pattern, it is possible to compute the luminous flux.

The result of this computation for this light spot is a luminous flux of 3724 lm.

### Luminous efficacy

The luminous flux being 3724 lm, and the consumed power of the lamp being 32.2 Watt, results in a luminous efficacy of 116 lm/Watt.


## Lamp measurement report - 29 March 2018

### Electrical properties

The power factor is 0.96. An electrical load with this power factor means that for every 1 kWh net energy consumed, there has been 0.29 kVAhr for reactive energy.

Lamp voltage	230.22 V
Lamp current	0.146 A
Power P	32.2 W
Apparent power S	33.6 VA
Power factor	0.96


Of this lamp the voltage across and the resulting current through it are measured and graphed.

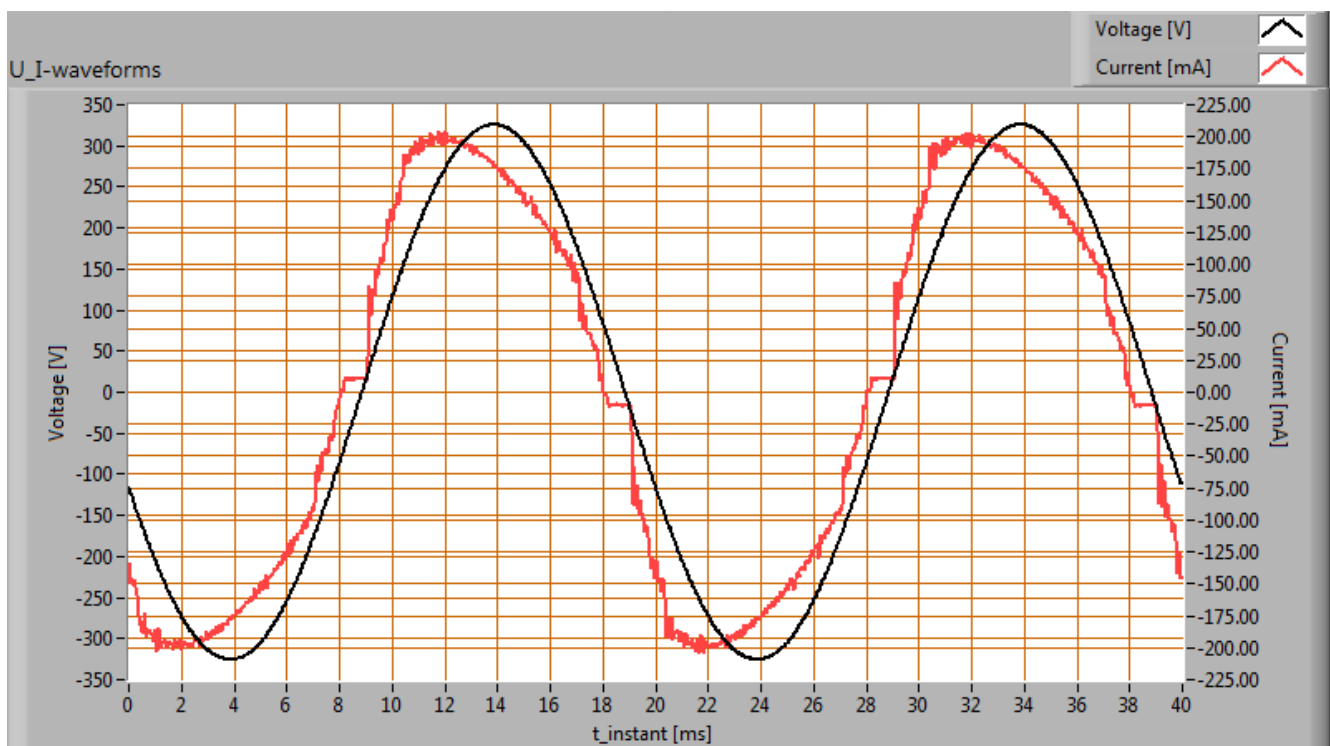

*Voltage across and current through the lightbulb*

This current waveform has been checked on requirements posed by the norm IEC 61000-3-2:2006 (including up to A2:2009).

## Lamp measurement report - 29 March 2018

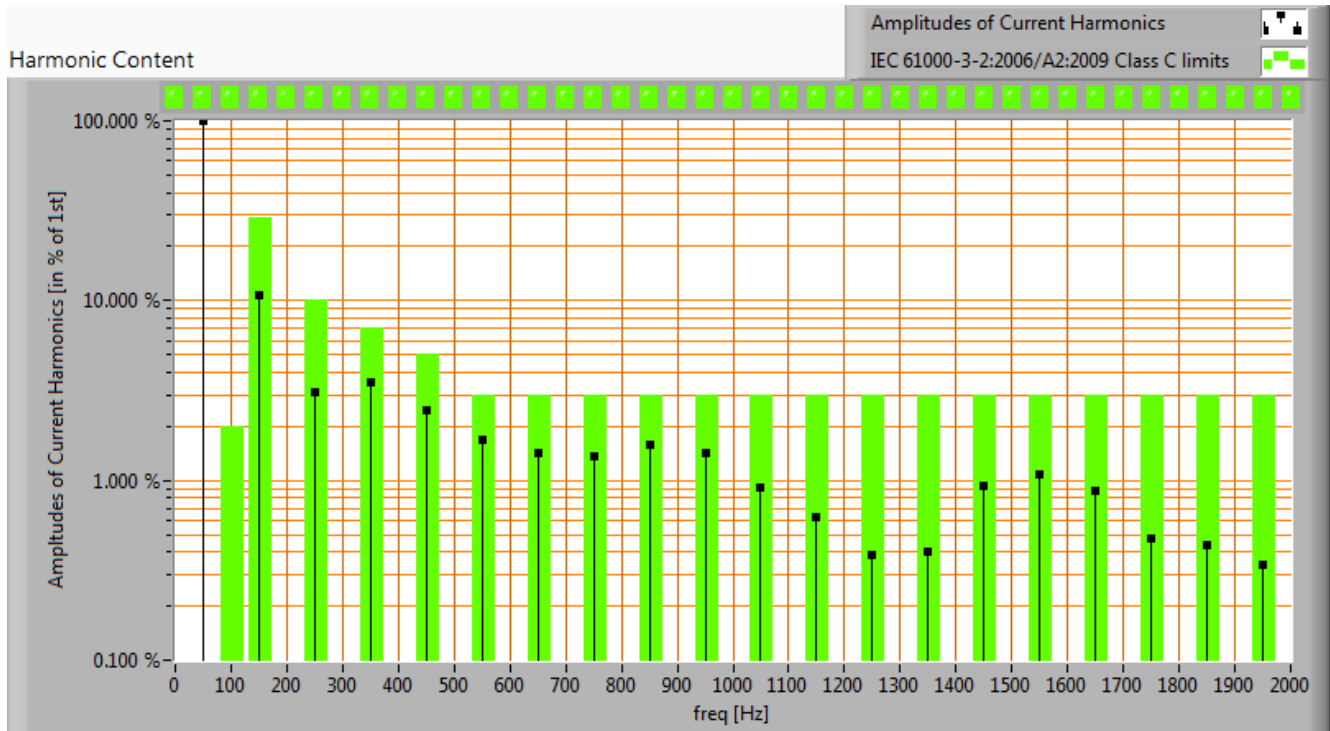

*Harmonics in the current waveform and checked against IEC61000-3-2:2006 and A2:2009*

When the consumed power is 25 W there are limits for the harmonics and those are fulfilled.


The Total Harmonic Distortion of the current is computed and its value is 13 %.

## Lamp measurement report - 29 March 2018

### Inrush current


The inrush current has been measured for different voltage start angles; from 0 - 170 degrees with a 10 degrees step. The current- and voltage values have been acquired at a sample speed of 39.9 kS/s. Then this data has been fed into a second order 2kHz low pass Butterworth filter. This removes the current spikes that do not represent relevant values. The lamp was two minutes off before every inrush current measurement was made.

Test voltage	230.0 V	
Frequency of the voltage	50.0 Hz	
Maximum inrush current	1.283 A	This current has been found at a voltage start angle of 100 degrees.
Pulse width of max inrush current	3.0E-4 s	This is the time that the pulse is higher than 10 % of the max inrush current.
Minimal inrush current	0.073 A	This current has been found at a voltage start angle of 0 degrees.
$I^2 \times t$ after 10 ms at 0 deg voltage start angle	1.300E-5 A	This is the $I^2 t$ value when a zero crossing detector is used to start the voltage from 0 degrees.

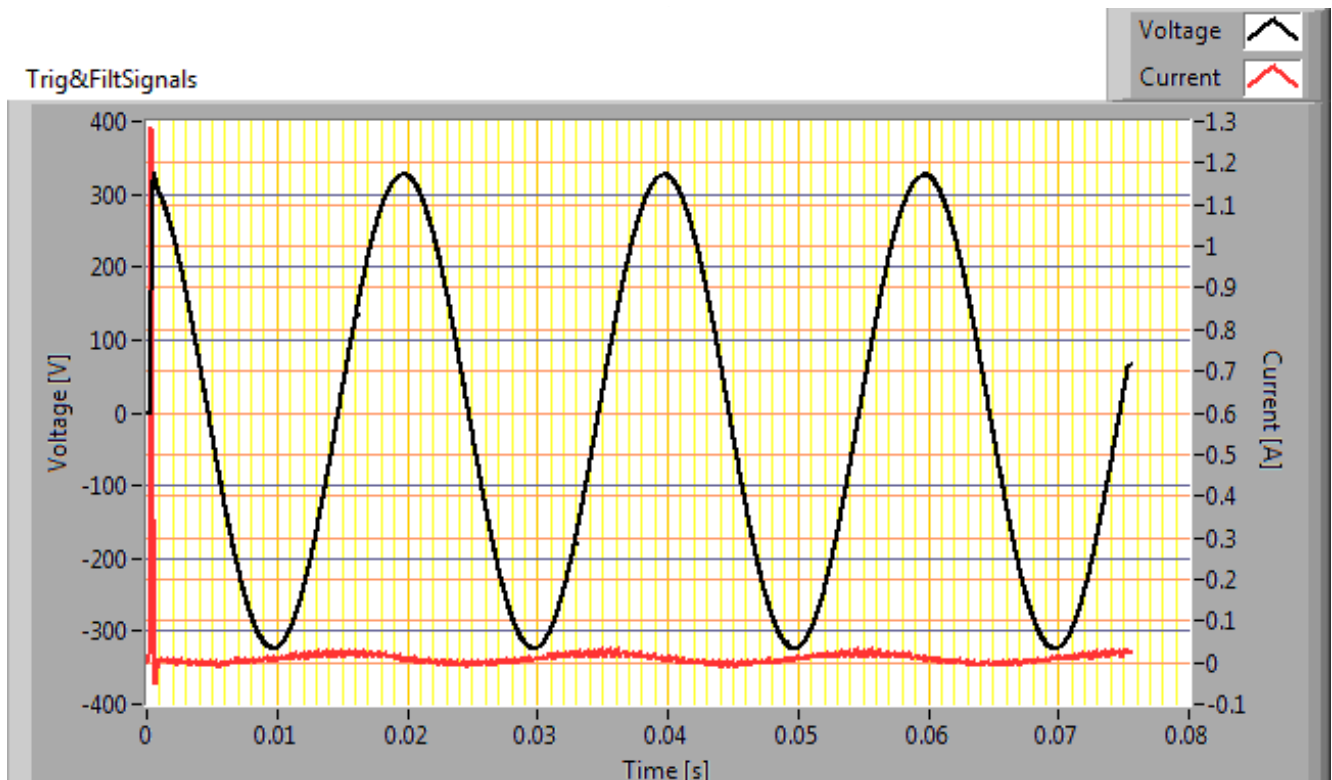


*Inrush current found at worst-case voltage start angle*

## Lamp measurement report - 29 March 2018

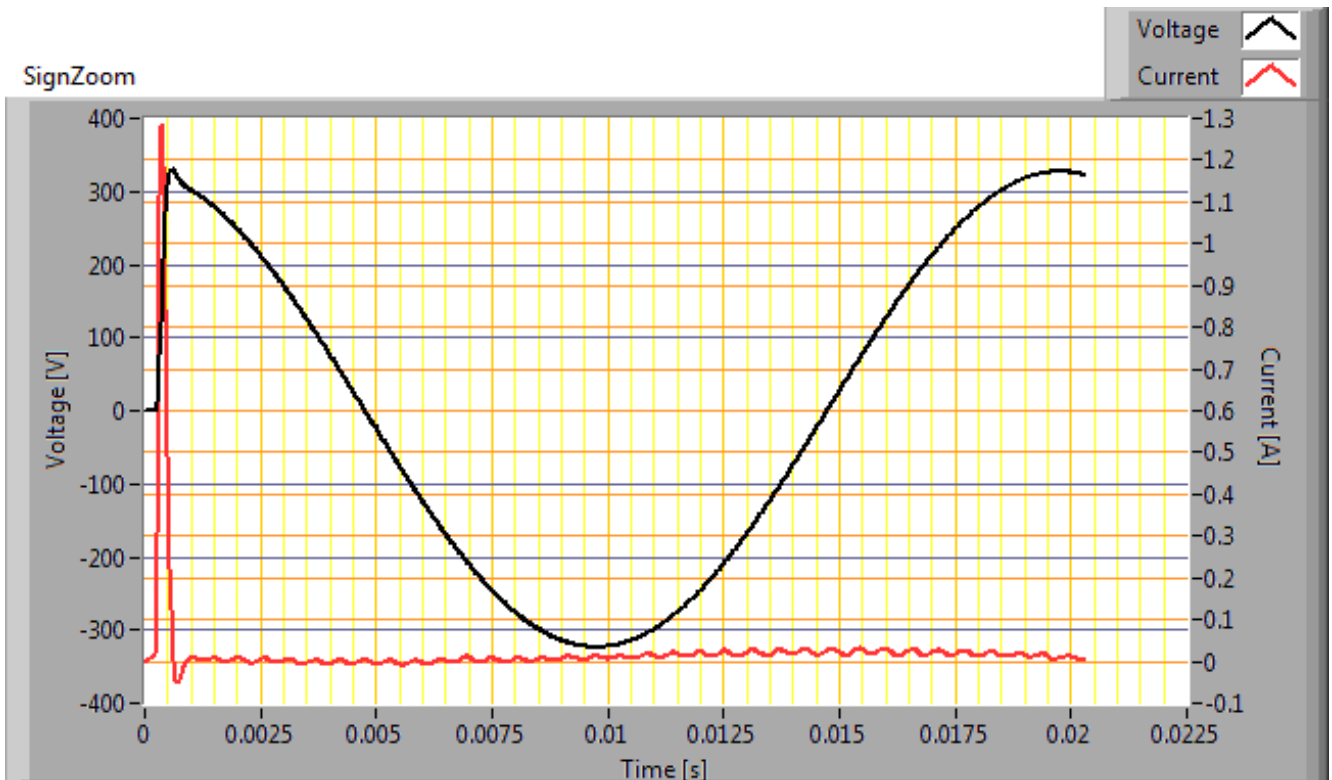


*First cycle of the maximum inrush current*

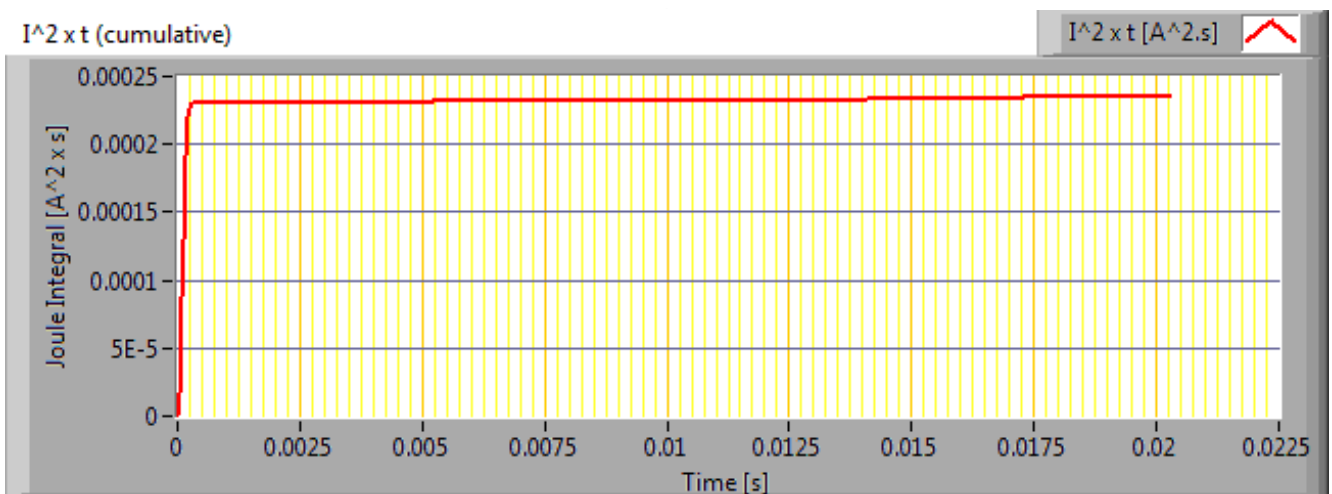

*The energy  $I^2t$  during the first 10 ms of the first current cycle*


**Lamp measurement report - 29 March 2018**

**Temperature measurements lamp**

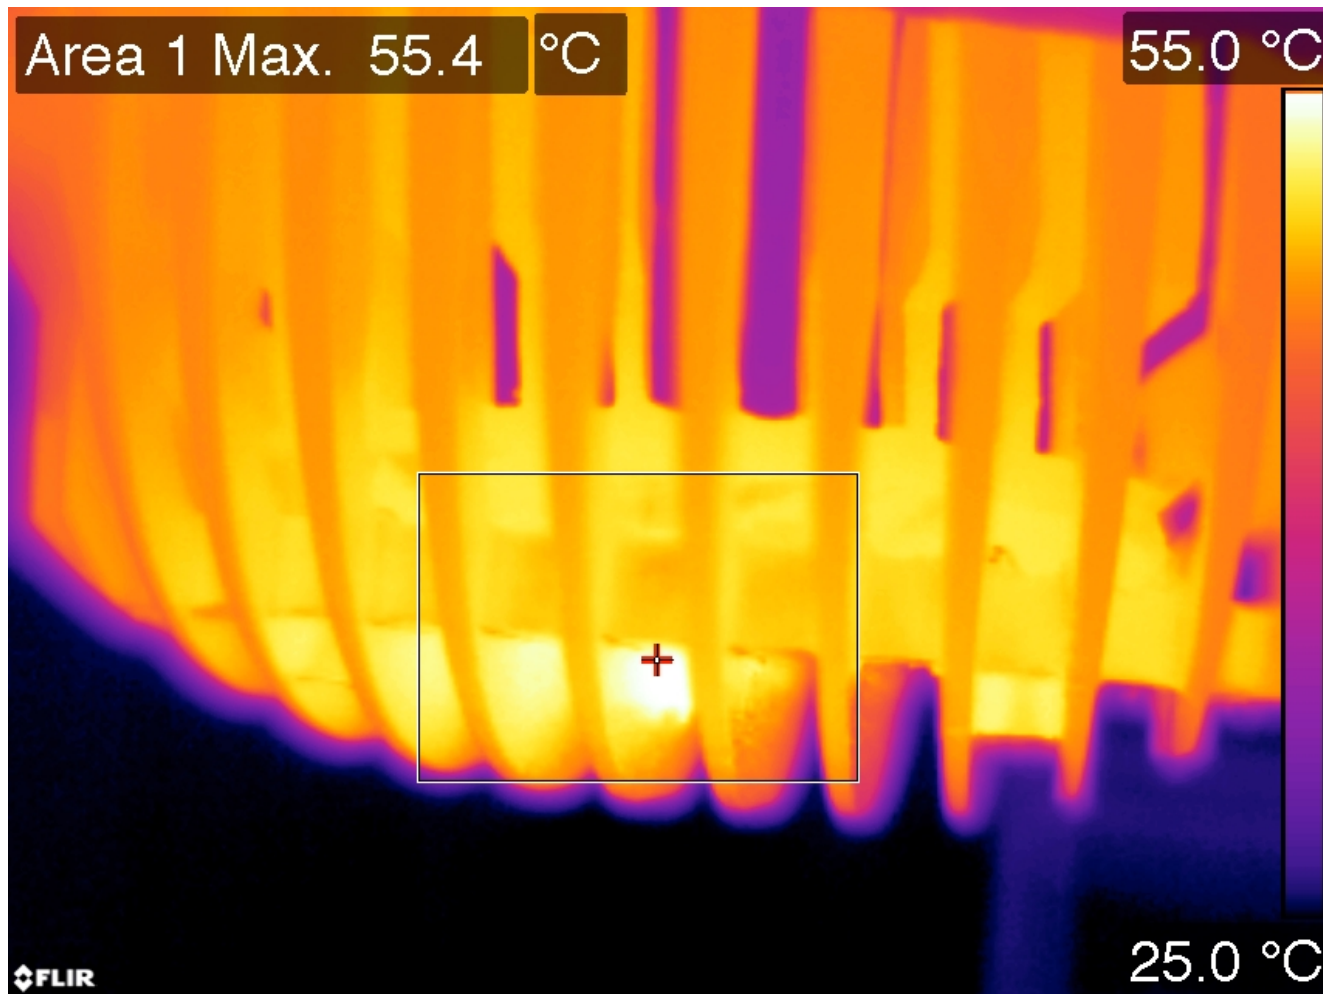




**Lamp measurement report - 29 March 2018**

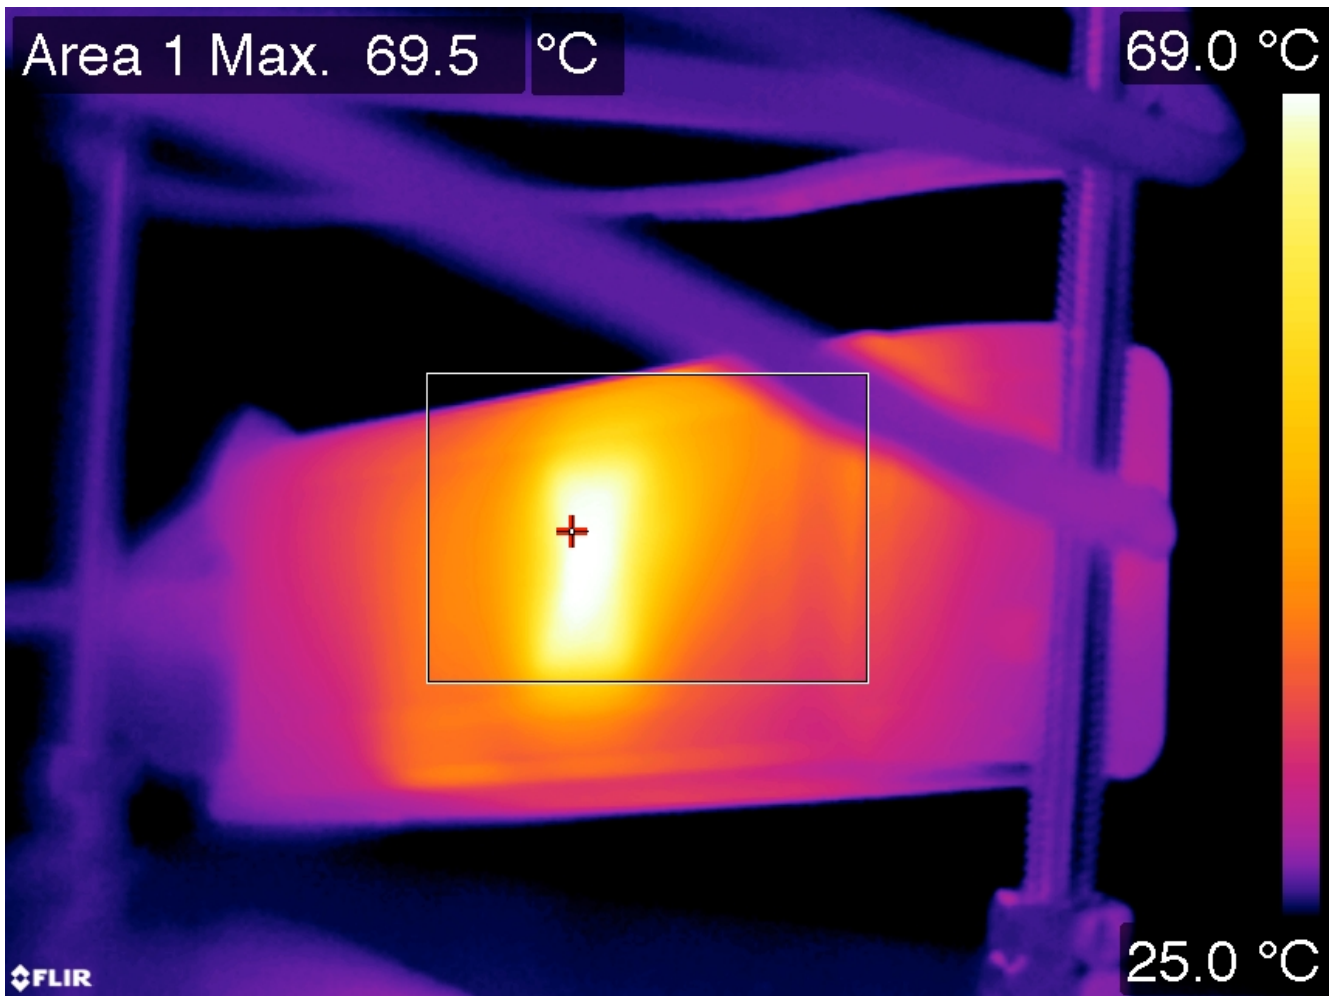



## Lamp measurement report - 29 March 2018

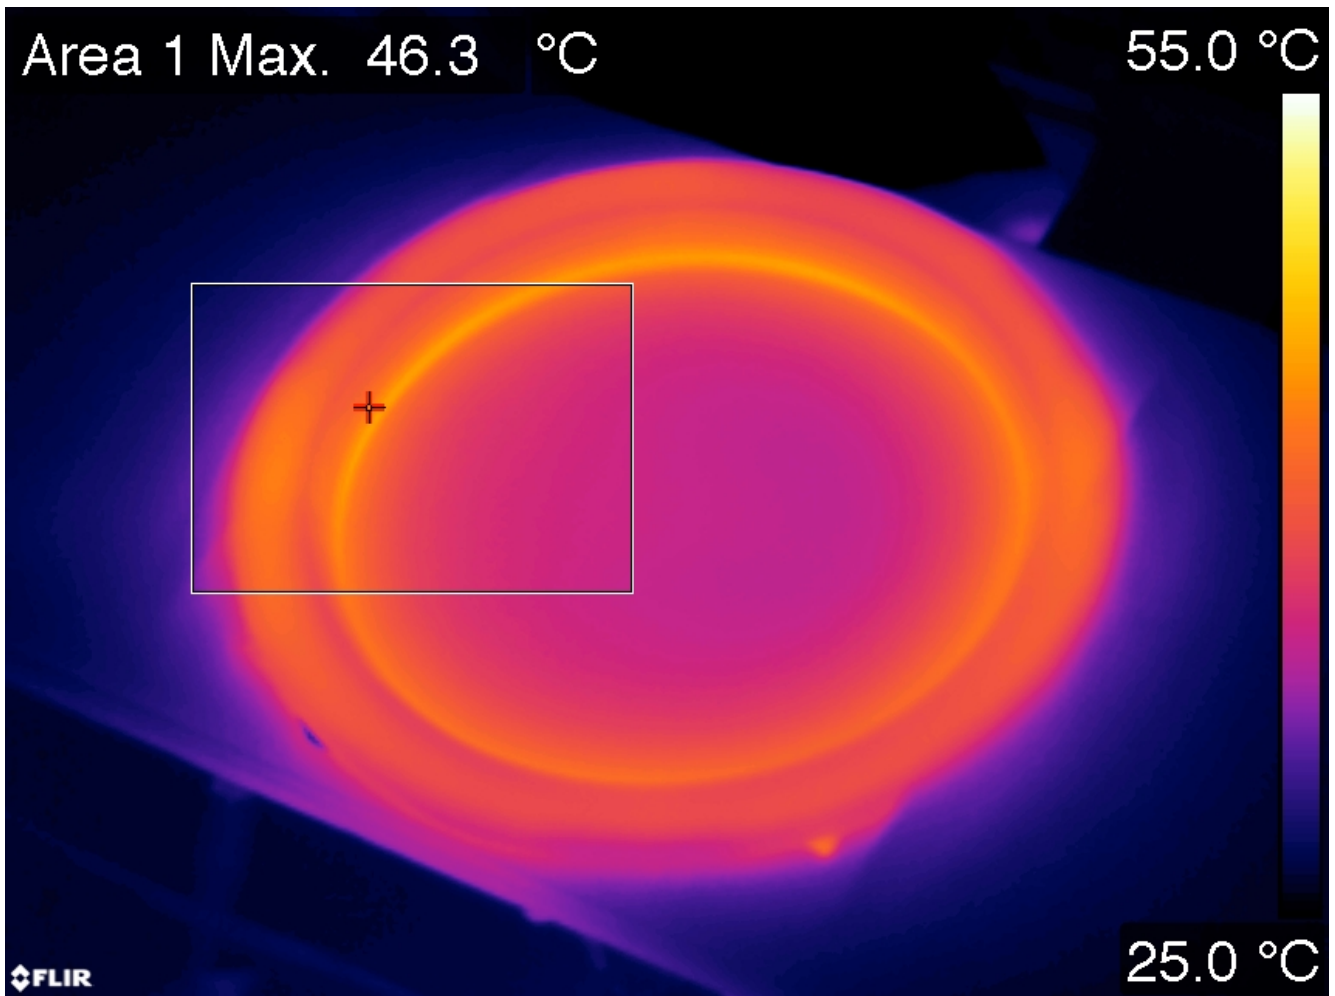


Temperature image(s).

status lamp	2 hours on
ambient temperature	24.5 deg C
reflected background temperature	24.5 deg C
camera	Flir T335
emissivity	0.95
measurement distance	0.5, 1 m
IFOV_geometric	0.136 mm per 0.1 m distance
NETD (thermal sensitivity)	50 mK

## Lamp measurement report - 29 March 2018

### Color temperature and Spectral power distribution

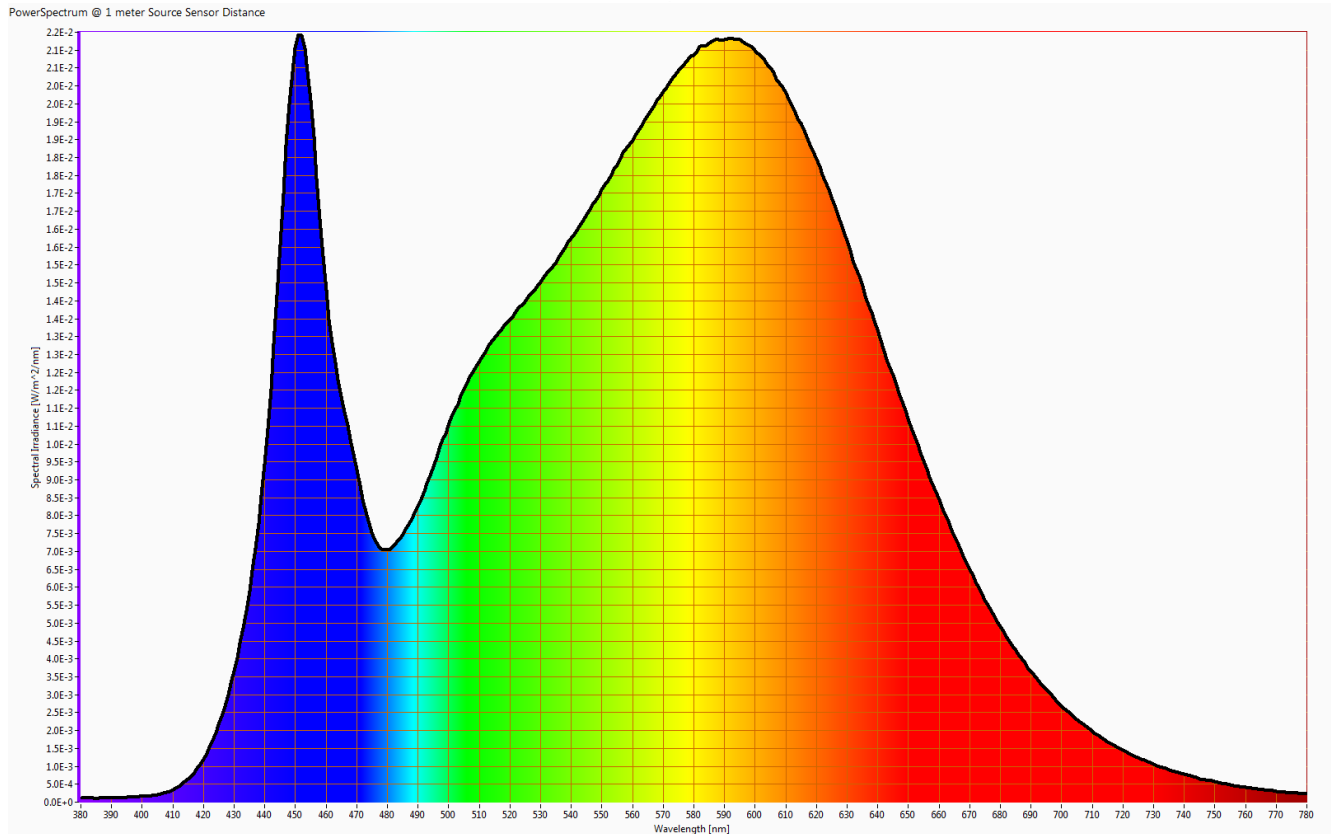


*The spectral power distribution of this light bulb, energies on y-axis valid at 1 m distance.*

The measured color temperature is 3997 K which is warm/neutral white.

This color temperature is measured straight underneath the light bulb. Below a graph showing the color temperature for different inclination angles.

## Lamp measurement report - 29 March 2018

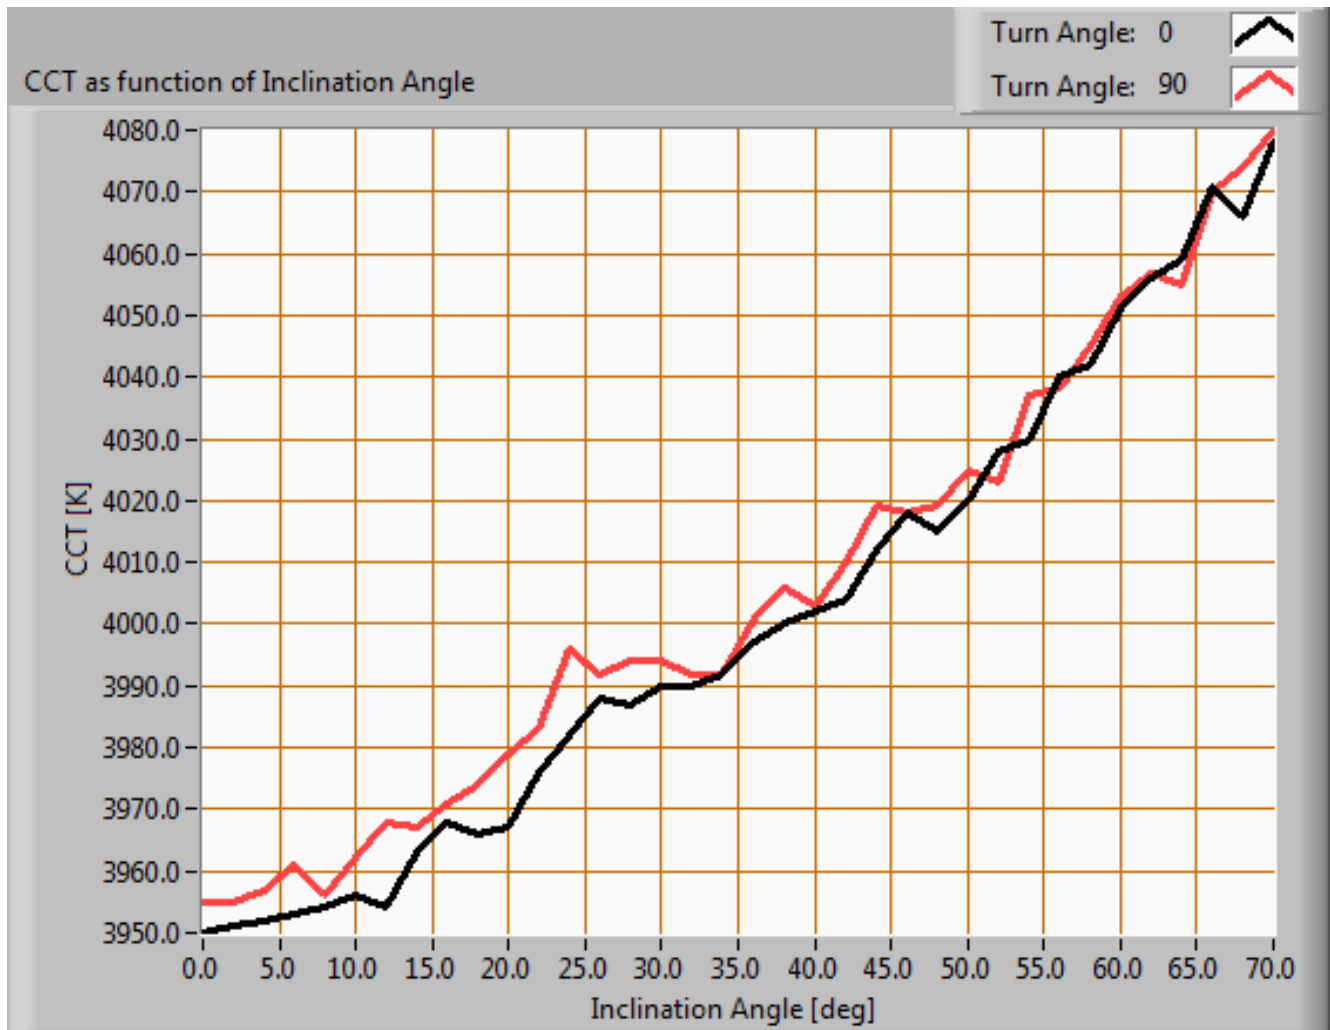


*Color temperature as a function of inclination angle.*

The color temperature is given for inclination angles up to 70 deg. Beyond that value the illuminance is so low ( 0.10 lux) that it has not been used for color determination of the light.

For the C0-C180 plane: the beam angle of 69 deg is equivalent to 34.4 deg inclination angle, which is the area where most of the light falls within. The maximum variation of color temperature in this inclination area is about 1 %.

For the C90-C270 plane: the beam angle of 69 deg is equivalent to 34.4 deg inclination angle, which is the area where most of the light falls within. The maximum variation of color temperature in this inclination area is about 1 %.

## Lamp measurement report - 29 March 2018

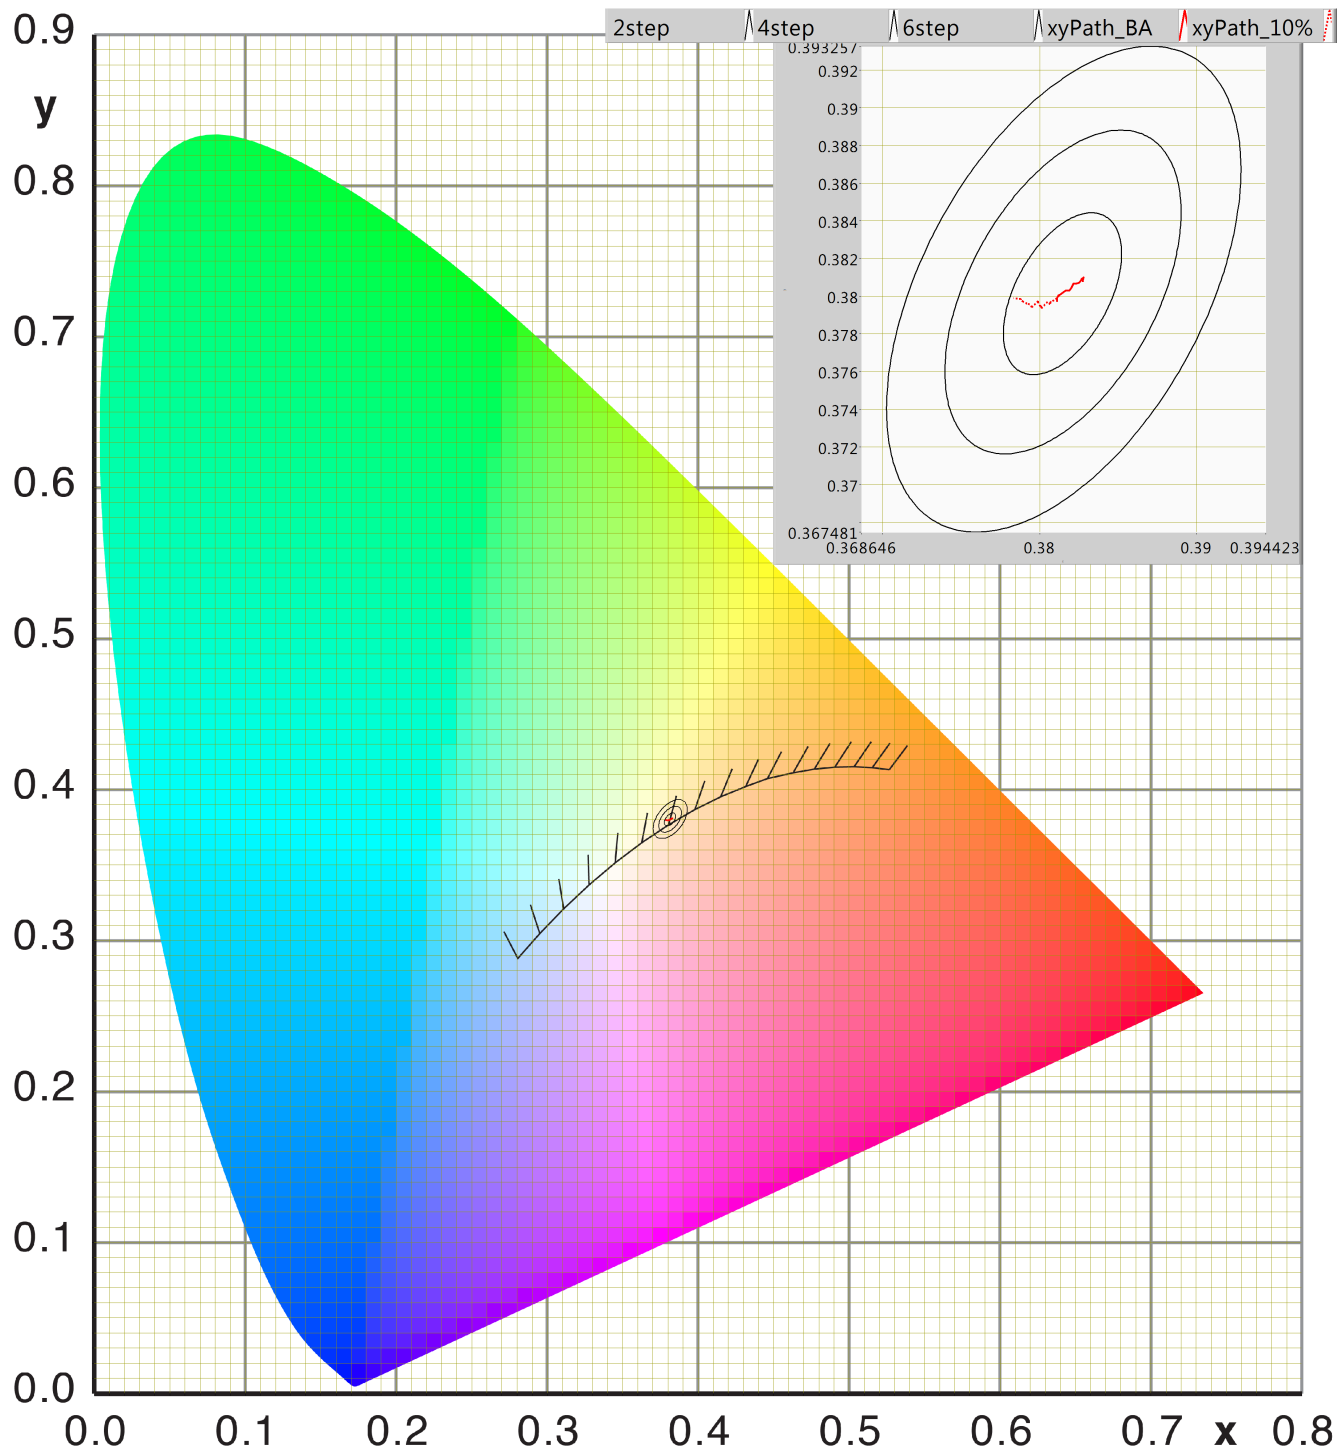


Color point dependent on inclination angle related to 2, 4 and 6 step MacAdam ellipse, for all angles within the beam angle (solid line) and for all angles where  $E_v$  dropped to 10 % value (dotted line)

## Lamp measurement report - 29 March 2018

### PAR value and PAR spectrum

To make a statement how well the light of this light bulb is for growing plants, the PAR-area needs to be determined.

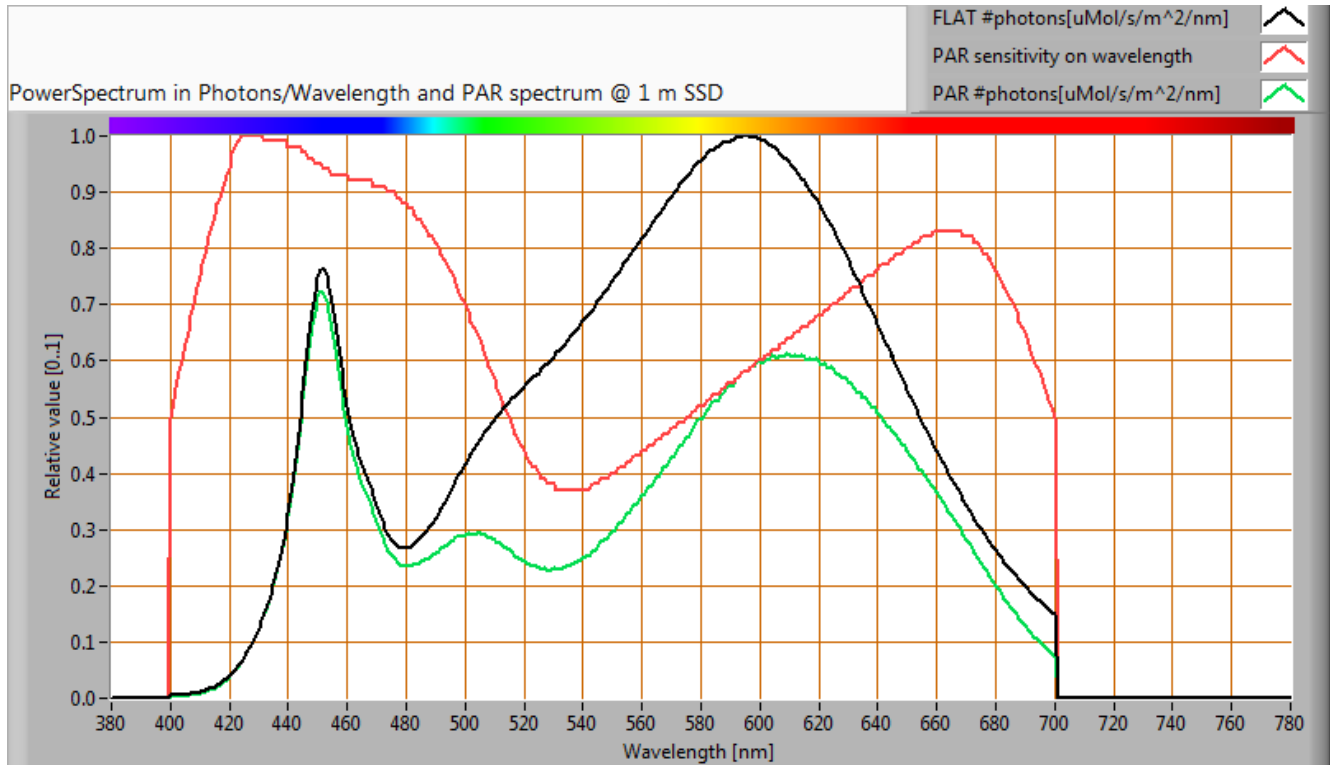

*The photon spectrum, then the sensitivity curve and as result the final PAR spectrum of the light of this light bulb*


parameter	value	unit
PAR photon current	33.0	uMol/s
PAR photon efficacy	1.0	uMol/s/W
photon current	53.3	uMol/s

The PAR efficiency is 64 % (valid for the PAR wave length range of 400 - 700 nm). This is the maximum percentage of the total of photons in the light that is effectively used by the average plant (since the plant might not take 100 % of the photons at the frequency where its relative sensitivity is 100 %).

## Lamp measurement report - 29 March 2018

### Luminous flux for chicken

The energy in the spectrum of the light of the lamp can be evaluated by the spectral sensitivity of the eye of chicken (N.B. Prescott and C.M. Wathes, 1999 and J. E. Saunders, J. R. Jarvis and C. M. Wathes, 2008).

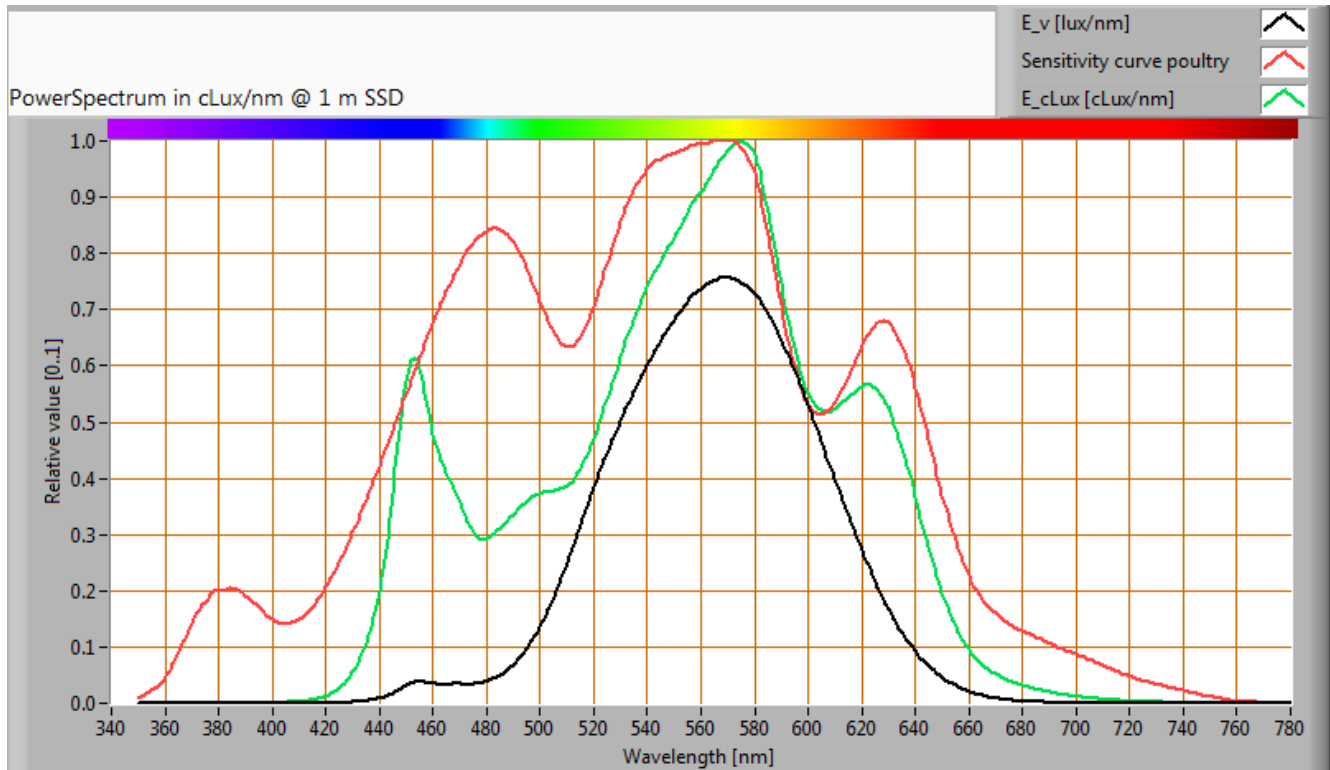


The spectrum of the light, multiplied by the spectral sensitivity of the human eye and the eye of a chicken.

parameter [unit]	value	explanation
Luminous flux [lm]	3724	The light of the lamp evaluated for a human eye.
Luminous flux chicken [cLm]	6367	The light of the lamp evaluated for the eye of a chicken.
Factor from lux to cLux	1.71	With this factor, the lux value of this light can be converted to the cLux value.

## Lamp measurement report - 29 March 2018

### S/P ratio

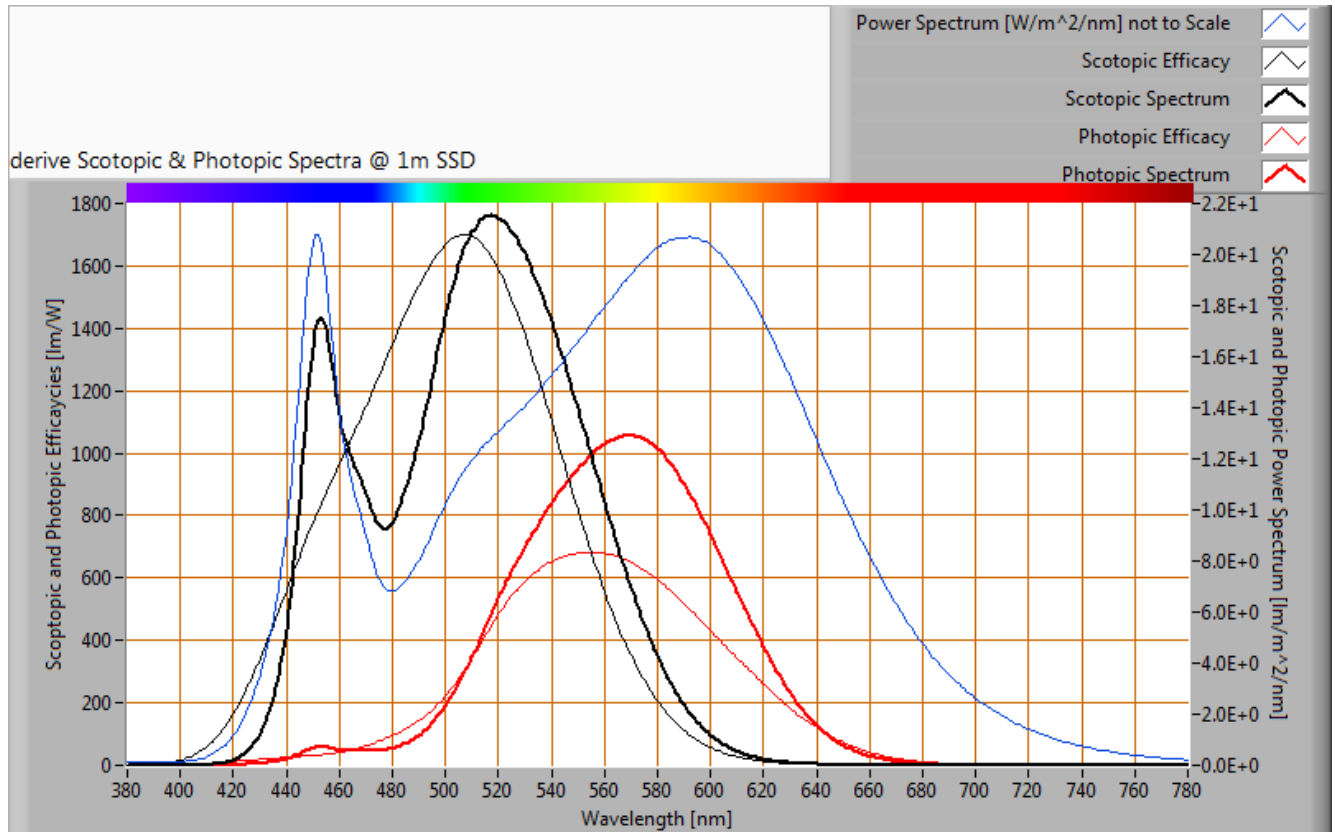


The power spectrum, sensitivity curves and resulting scotopic and photopic spectra (spectra energy content defined at 1 m distance).

The S/P ratio of the light coming from this lamp is 1.7.



## Lamp measurement report - 29 March 2018

### Chromaticity diagram

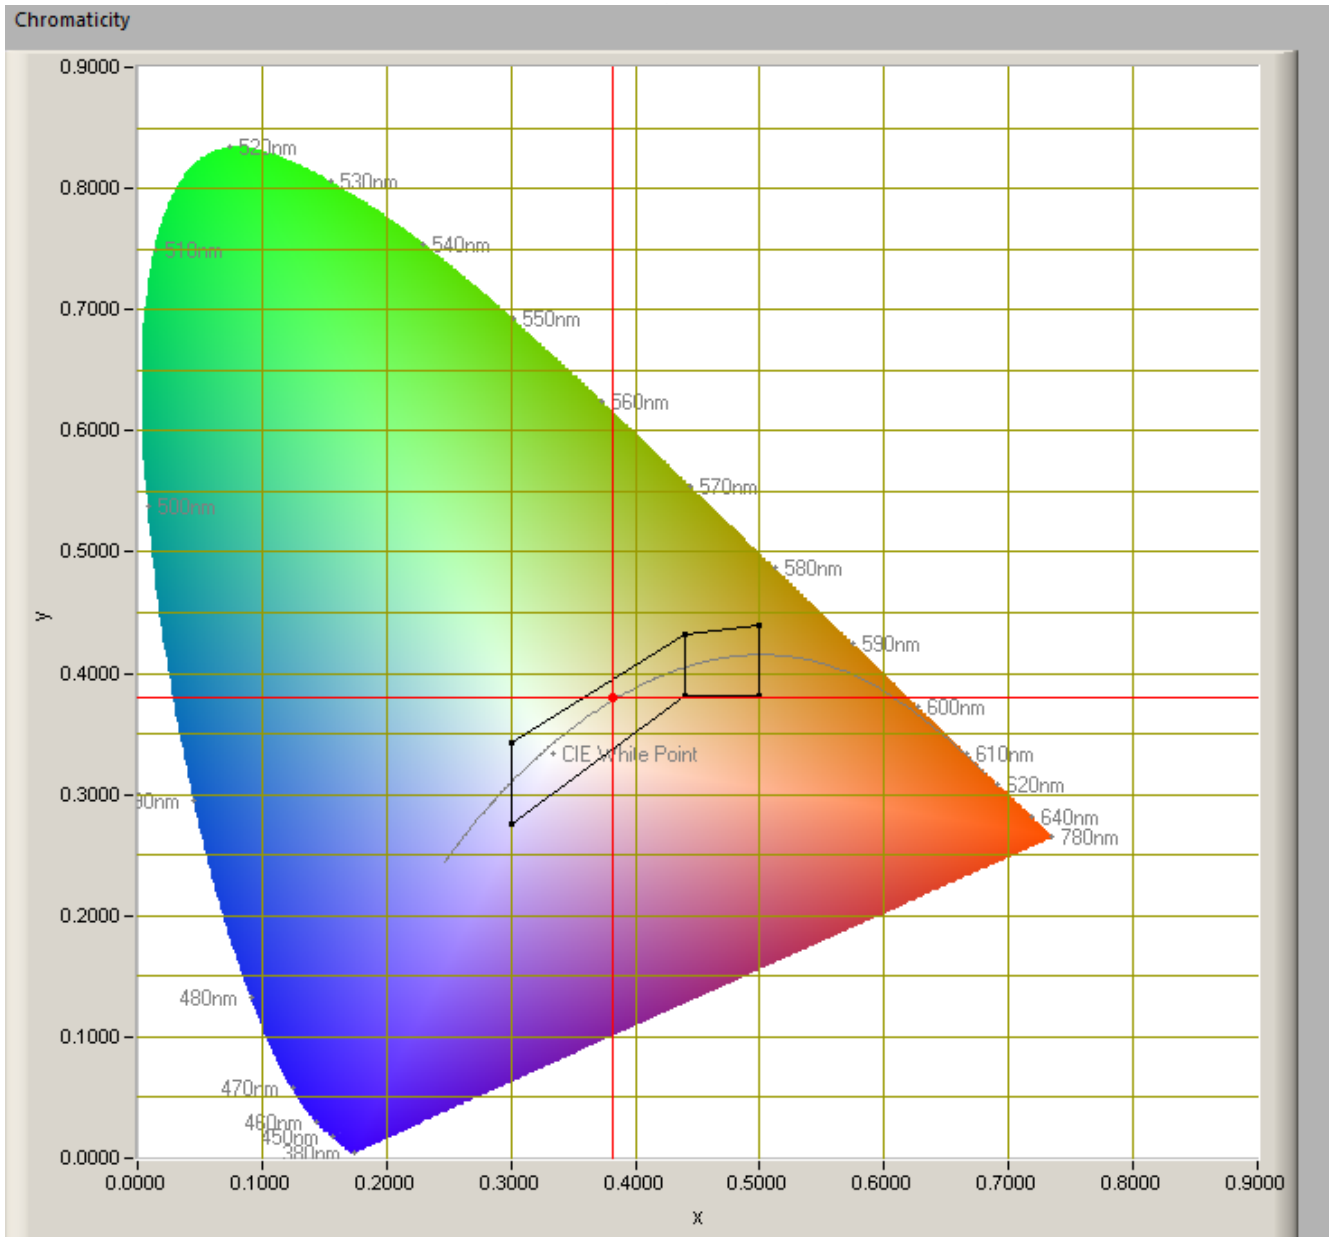

*The chromaticity space and the position of the lamp's color coordinates in it.*

The point of the light in this diagram is inside the area indicated with class A. The areas A and B indicate areas for signal lamps.

The color coordinates are  $x=0.3814$  and  $y=0.3801$ .

## Lamp measurement report - 29 March 2018

### Color Rendering Index (CRI) or also Ra

Herewith the image showing the CRI as well as how well different colors are represented (rendered). The higher the number, the better the resemblance with the color when a black body radiator would have been used (the sun, or an incandescent lamp)

Each color has an index  $R_x$ , and the first 8 indexes ( $R_1 \dots R_8$ ) are averaged to compute the  $R_a$  which is equivalent to the CRI.

☐ manual

Reference Illuminant: planckian CCT: 3997 K

Chromaticity Difference DC= 1.3E-3

R1= 79.7	R8= 62.3	R15= 73.1
R2= 89.2	R9= 3.5	
R3= 95.6	R10= 74.6	
R4= 79.8	R11= 78	
R5= 80	R12= 62.9	
R6= 84.9	R13= 82	
R7= 85.2	R14= 97.9	

**Ra**  
(mean value of  $R_1 - R_8$ )

**82.1**

*CRI of the light of this lightbulb.*

This value of 82 indicates how well the light of this lamp can render well a set of reference colors, this in comparison with the light of a reference source (for color temperatures 5000K a black radiator is used as reference and for color temperatures 5000K the sun or the light outside during the day).

The value of 82 is bigger than the value of 80 that is considered as a minimum for working areas in general.


Note: the chromaticity difference is 0.0013 and indicates the distance to the Planckian Locus. There is a value mentioned of max 5.4E-3 in section 5.3 of CIE 13.3-1995 however no further explanation of it.

An other reference with signal lights as a reference is given in the chromaticity diagram.


## Lamp measurement report - 29 March 2018

### Color quality scale TM-30-15

TM-30-15 is an improved indicator (over CRI) of how well colors are rendered.  
TM30-15 R<sub>f</sub> = 82, R<sub>g</sub> = 94.

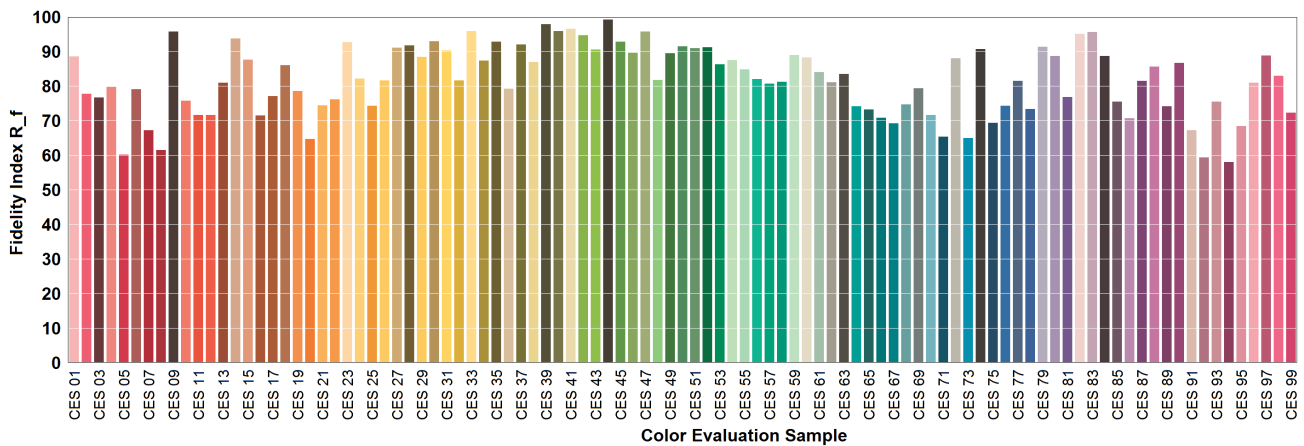

TM-30-15-values for 99 samples for the light of this light bulb. The closer the value for a testcolor comes to 100, the more its rendition resembles that of a reference lightsource.

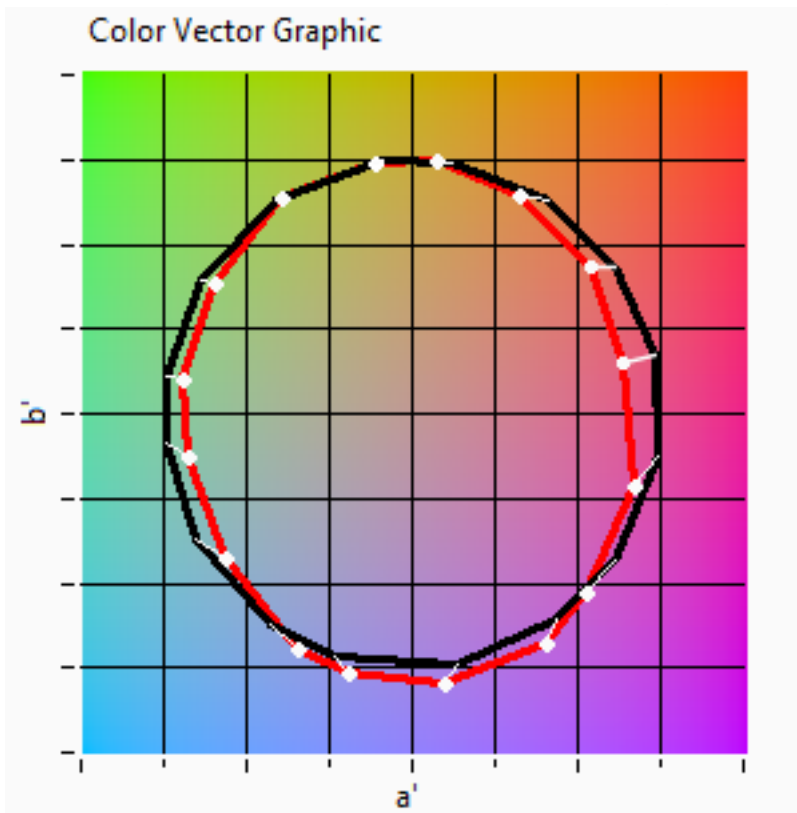


Graphical view of averaged color points for this light bulb compared to a reference source with the same color temperature.

## Lamp measurement report - 29 March 2018

### Voltage dependency

The dependency of a number of lamp parameters on the lamp voltage is determined. For this, the lamp voltage has been varied and its effect on the following light bulb parameters measured: illuminance  $E_v$  [lx], the lamp power  $P$  [W] and the luminous efficacy [lm/W] (this latter is estimated here by dividing the found  $E_v$  value by  $P$ ).

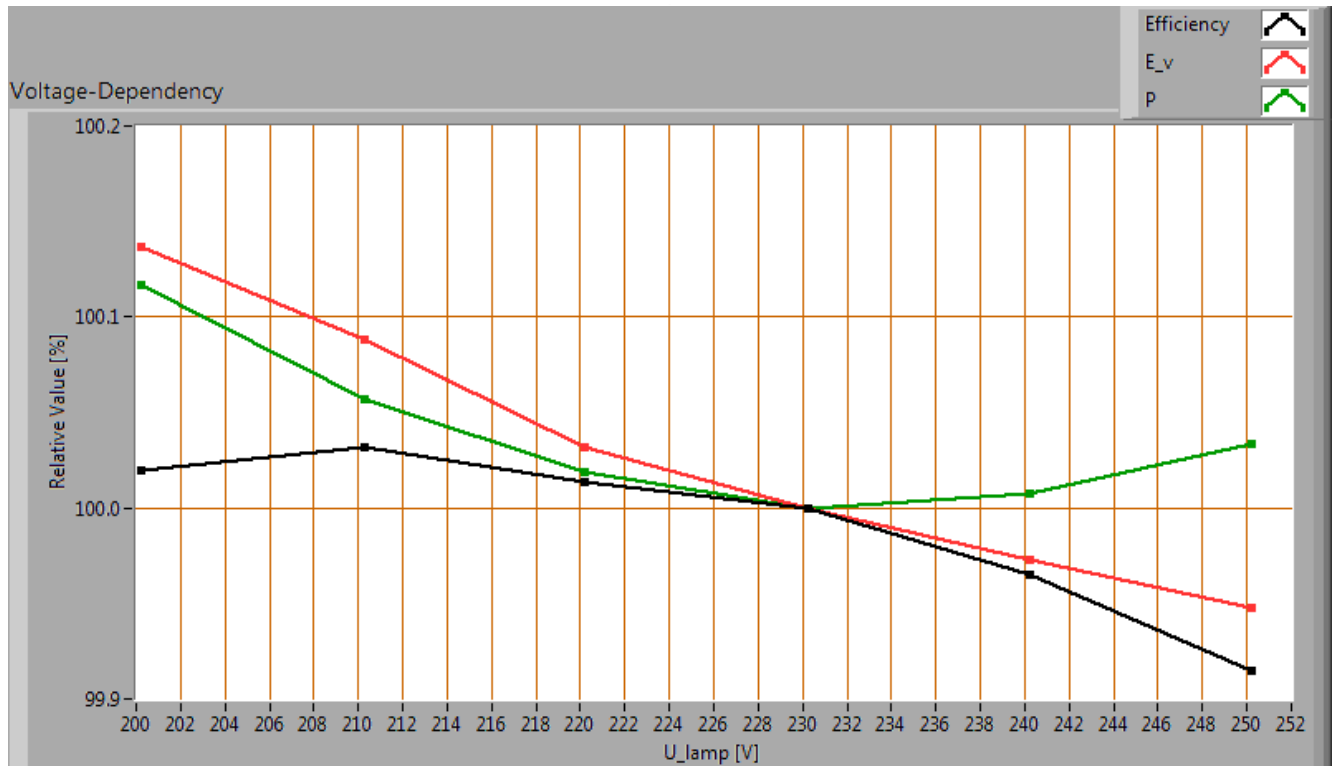

*Lamp voltage dependencies of certain light bulb parameters*

There is no (significant) dependency of the illuminance when the power voltage varies between 200 - 250 V AC.



There is no (significant) dependency of the consumed power when the power voltage varies between 200 - 250 V AC.

When the voltage varies abruptly with + or - 5 V AC then this results in a variation of the illuminance of maximally 0.0 %. This difference in illuminance is not visible (when it occurs abruptly).

## Lamp measurement report - 29 March 2018

### Warm up effects

After switch on of a cold lamp, the effect of heating up of the lamp is measured on illuminance  $E_v$  [lx], the lamp power  $P$  [W] and the luminous efficacy [lm/W].

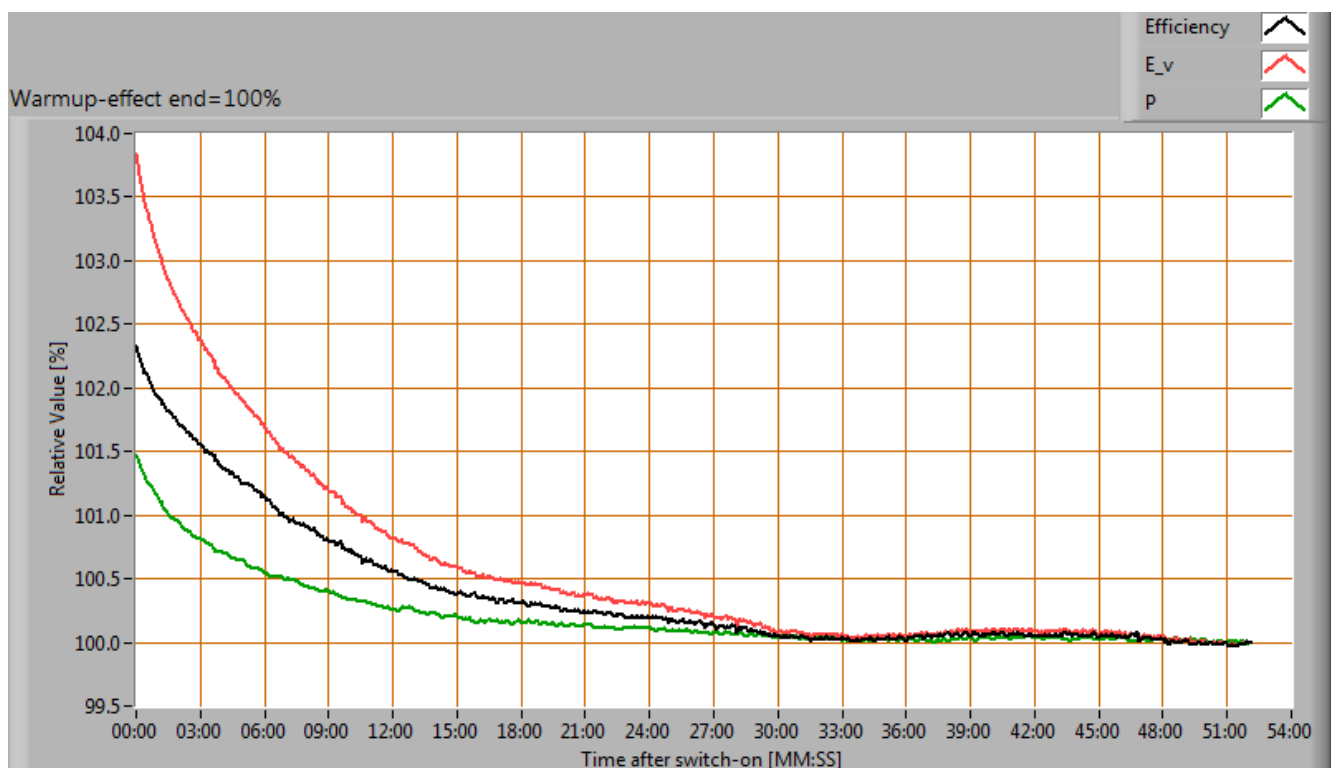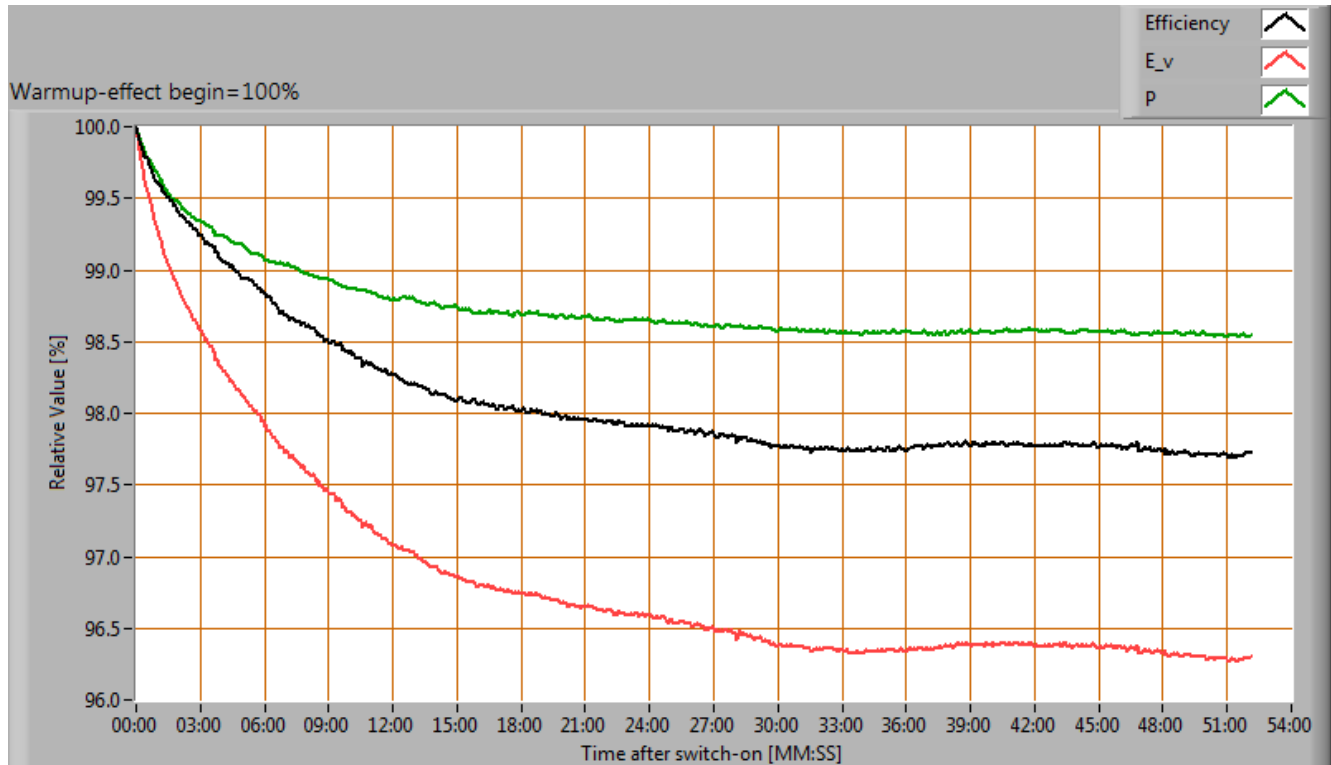

Effect of warming up on different light bulb parameters. In the first graph the 100 % level is put at begin, and in the last graph the 100 % level is put at the end.

## Lamp measurement report - 29 March 2018


During the warmup time the illuminance doesn't vary significantly ( 5 %).

During the warmup time the power doesn't vary significantly ( 5 %).

The variation in efficacy (calculated as indication by simply dividing the illuminance by the power) during the warming up is -2 %. A very high negative value indicates a significant decrease for instance due to heating up of the lamp (decrease of lifetime).


### Measure of flickering

An analysis is done on the measure of flickering of the light output by this light bulb.

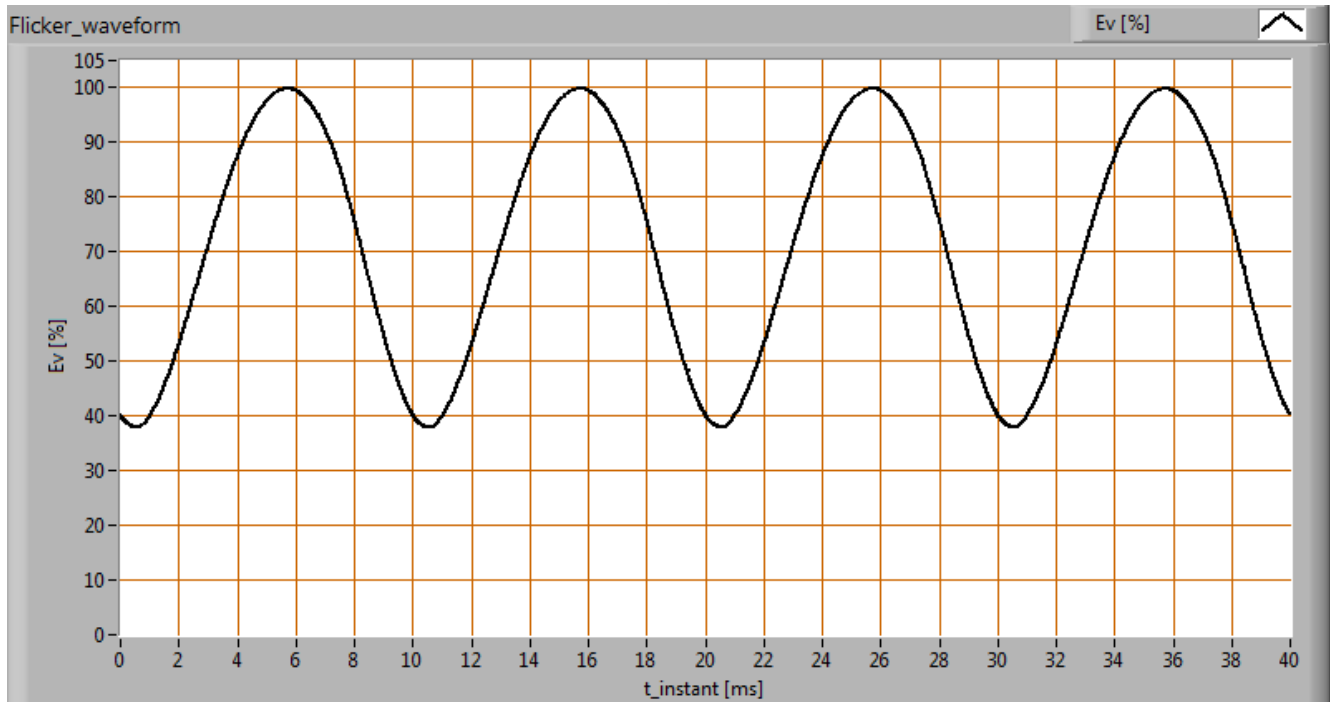

*The measure of fast illuminance variation of the light of the light bulb*

parameter	value	unit
Flicker frequency	100.0	Hz
Illuminance modulation index	45	%
Flicker index	0.160	[-]
Compact Flicker Degree	23	%

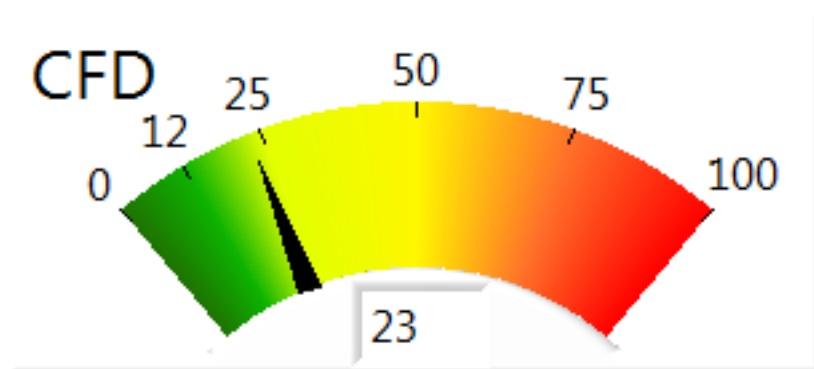

Acceptable.

## Lamp measurement report - 29 March 2018

The illuminance modulation index is computed as:  $(\max\_Ev - \min\_Ev) / (\max\_Ev + \min\_Ev)$ .

### Melanopic effect

The melanopic effect shows the level of impact the light of this lamp can have on the day-night rhythm of human beings (as well as the suppression of melatonin production). The important parameters (according to norm DIN SPEC 5031-100:2015-08):


melanopic effect factor	0.564
k_mel trans (25 years)	1.047
k_mel trans (32 years)	1.000
k_mel trans (50 years)	0.847
k_mel trans(75 years)	0.612
k_mel trans(90 years)	0.485
k_pupil(25 years)	1.088
k_pupil(32 years)	1.000
k_pupil(50 years)	0.792
k_pupil(75 years)	0.543
k_pupil(90 years)	0.416



## Lamp measurement report - 29 March 2018

### Blue Light Hazard

The amount of blue light and the harm it can cause on the retina has been determined. Herewith the results.

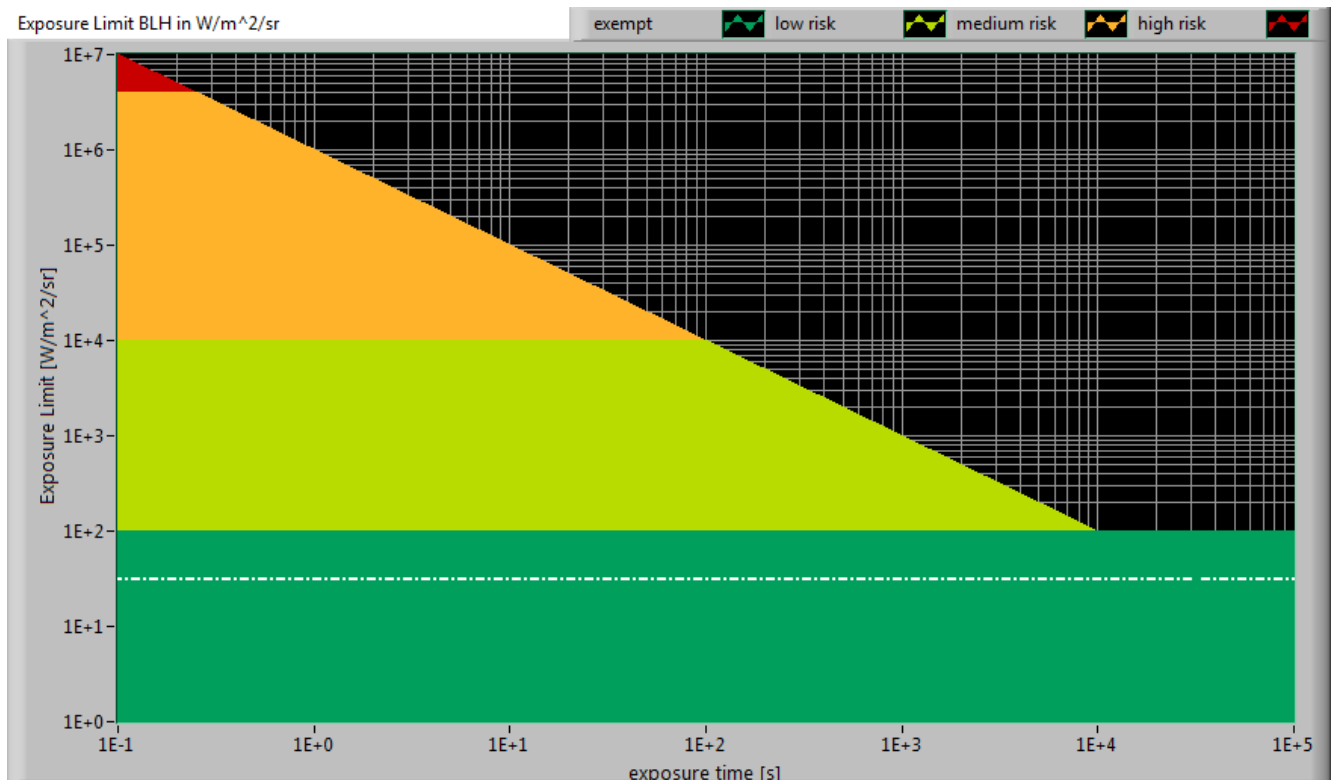

The level of blue light of this lamp related to the exposure limit and the different classification areas.

L_lum0 [mm]	215	Dimension of brightest part of lamp in C0-C180 direction.
L_lum90 [mm]	215	Dimension of brightest part of lamp in C90-C270 direction.
SSD_500lx [mm]	2180	Calculated distance where $E_v = 500 \text{ lux}$ . This computation is valid when it is in the far field of the lamp. Note: if this value 200 mm then the distance of 200 mm is taken as proposed in the norm IEC 62471:2006.
Start of far field [mm]	1520	Minimum distance at which the lamp can be seen as a point source. In this area the $E_v$ is linearly dependent from $(1/\text{distance})^2$ .
300-350 nm values stuffed with 0s	yes	In the event OLiNo has measured with a SpB1211 spectrometer without UV option then the irradiance data of 300-349 nm is missing. For lamps where there is already no energy content near 350 nm, the values 300-349 can also be set at zero then.
alpha_C0-C180 [rad]	0.099	(Apparent) source angle in C0-C180 direction.
alpha_C90-C270 [rad]	0.099	(Apparent) source angle in C90-C270 direction.


## Lamp measurement report - 29 March 2018

alpha_AVG [rad]	0.099	Average (apparent) source angle. If average $\geq 0.011$ rad then the exposure limit is computed with radiance $L_b$ . Otherwise with irradiance $E_b$ .
Exposure value [ $\text{W}/\text{m}^2/\text{sr}$ ]	3.09E+1	Blue Light Hazard value for this lamp, measured straight underneath the lamp. Computation is referenced to $L_b$ .
Blue Light Hazard risk group	0	0=exempt, 1=low, 2 = moderate, 3=high risk.

### Extra



## Lamp measurement report - 29 March 2018

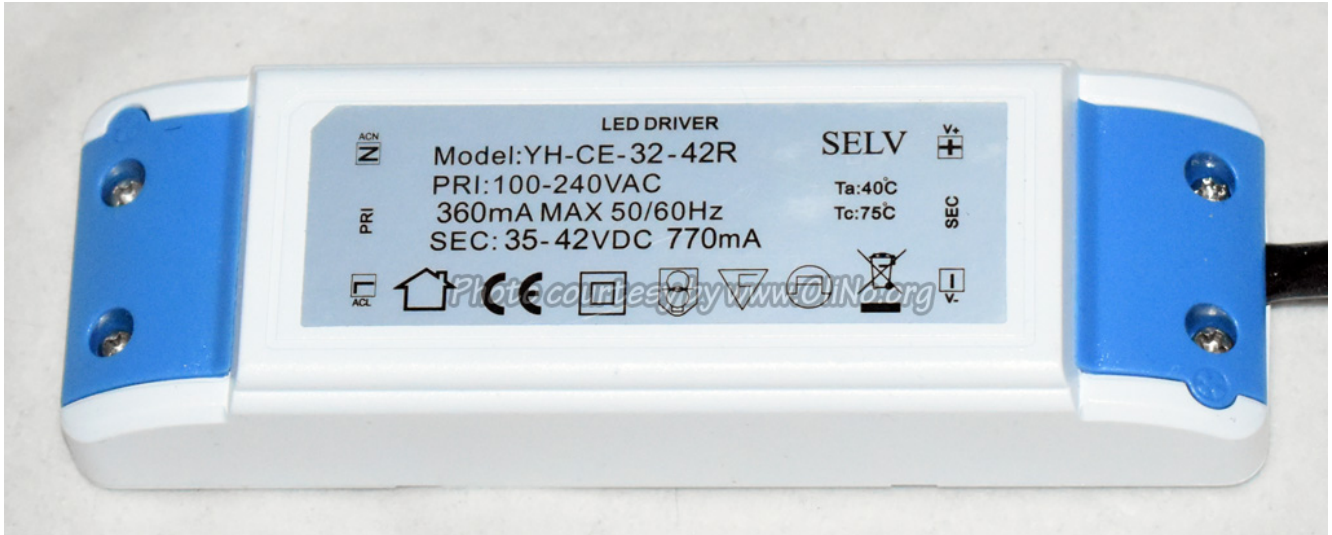

*Additional photos.*

### Disclaimer

The information in this OliNo report is created with the utmost care. Despite this, the information could contain inaccuracies. OliNo cannot be held liable in this instance nor can the data in this report be legally binding.

We strive to adhere to all of the conditions of any copyright holder in the publication of any illustration/article or item. In the event that we unintentionally violate said copyright holder's conditions in our articles, we kindly ask to be contacted here at OliNo so that we can resolve any disputes, issues or misunderstandings.

### License

It is permitted **ONLY** to use or publish this report in its entirety and in unaltered form via internet or other digital or written media in any form. To guarantee the reliability and accuracy of the report, it is strictly prohibited to change or alter parts of the report and/or republish it in a modified content.